

CONCRETE CHIC™

GLAZED PORCELAIN FLOOR WITH REVEAL IMAGING™

AMERICAN OLEAN®



CONCRETE LOOK



AMERICAN OLEAN®
PROVEN IN TILE™

CONCRETE CHIC™

Concrete Chic refreshes the popular stained cement aesthetic with updated graphics and a contemporary color palette in a product that is made in the USA with recycled content. At home in modern residential settings as well as commercial spaces, Concrete Chic is sure to capture attention.



Cover and above photos feature Concrete Chic™ Elegant Grey 12 x 24 on the floor.

CONCRETE CHIC™

GLAZED PORCELAIN FLOOR WITH REVEAL IMAGING™

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING




SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

CONCRETE LOOK

GLAZED PORCELAIN FLOOR TILE

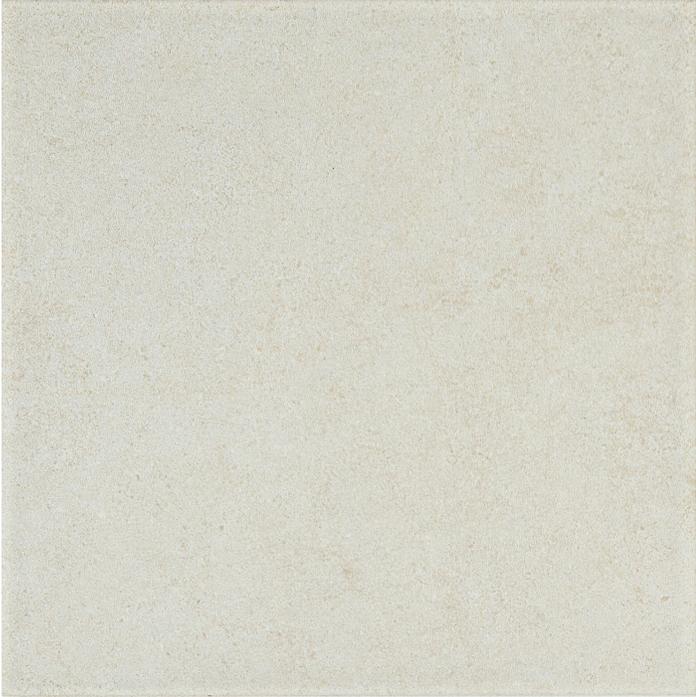

CURRENT CREAM CC65



ELEGANT GRAY CC67



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

CONCRETE CHIC™

GLAZED PORCELAIN FLOOR WITH REVEAL IMAGING™

AMERICAN OLEAN®

FINISHES: MATTE

USAGE



MATERIAL



PRICING



SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

CONCRETE LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	12 x 24 Floor Tile	11-7/8" x 23-5/8" (30.23 cm x 60.12 cm)	5/16"	17.60	9

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	●
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	●
Ramps & Inclines	≥ 0.65	●
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	●

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	P43C9	30
	Cove Base	6 x 12	P36C9TB	22
	Cove Base Outcorner	1 x 6	PC36C9TB	15

INSTALLATION & PRICING

RECOMMENDED GROUT JOINT:

3/16" (Overlap should not exceed 33% when installing tile with a length 15" or greater in a staggered brick-joint pattern. When multiple sizes are installed in a modular pattern, please specify same size caliber at time of order.)

SHADE VARIATION



PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1 Residential Bathrooms	3 All Residential / Light Commercial*
2 All Residential Areas	④ All Residential / Commercial**

*CC68, CC69 **CC65, CC66, CC67

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Use of a latex modified thin-set is recommended for installation. For more information, visit americanolean.com.

FEATURES



All or select items within this series meet the requirements for these qualifications. For more information visit americanolean.com.

888.AOT.TILE



AMERICAN OLEAN®
PROVEN IN TILE™