MS914114

Dorian One Piece Toilet, 1.6 GPF



MS914114 - Dorian Toilet with SoftClose Seat

- Elegant, gentle curved, skirted one piece toilet
- Skirted styling with concealed trapway for easy cleaning
- UniFit Rough-in system
- Power Gravity system
- Designer Suite: Matching Dorian pedestal and self rimming lavatories
- Large water surface

Low profile skirted toilet with 12" UniFit Rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, color matched trip lever, mounting covers and SoftClose seat included.

MS914114

Elongated with SoftClose Seat. 12" UniFit Rough-in.

☐ TSU01W.10

10" UniFit Rough-in component.

- Optional.

☐ TSU01W.12

12" UniFit Rough-in component.

- Supplied.

☐ TSU01W.14

14" UniFit Rough-in component.

- Optional.

Colors:

Standard #01 Cotton
Optional See price book for

additional colors

Trip Lever:

Standard Color Matched

Optional #CP Chrome Plated
#PB Polished Brass

Dorian One PieceToilet, 1.6 GPF

■ PERFORMANCE

The TOTO low consumption received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a 100% glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf/6.0 Lpf Gravity Feed Flush System:

(Power Gravity system)

Min. Water Pressure: 8 psi

Water Surface: 10-1/4" x 8-1/4"

Trap Diameter: 2-1/16"

Rough-in: 12" (10" and 14" optional)

Trapseal:

Warranty: Five Year Limited Warranty Material: Tank & Bowl: Vitreous china

UniFit Rough-in: PVC

Shipping Weight: 102 lbs. MS914114

Shipping Dimensions: MS914114


32-7/8"L x 23-5/8"W x 24-3/4"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

These dimensions and specifications are subject to change without notice.

US. Patent 5.819.326, 5.850.639 and pending.

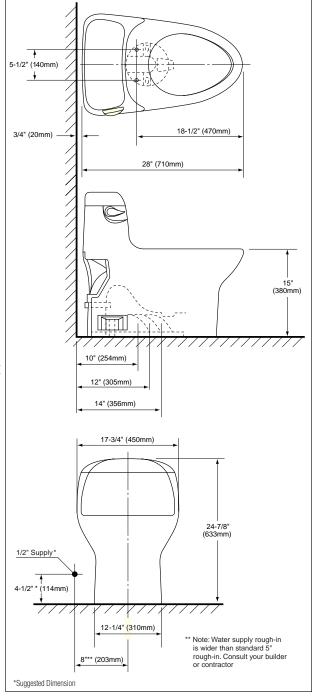

MS914114 - Dorian Toilet

