
MODEL NUMBER:

6013 Centerset Lavatory Speed Connect™ drain.
Metal lever handles. Chrome finish.

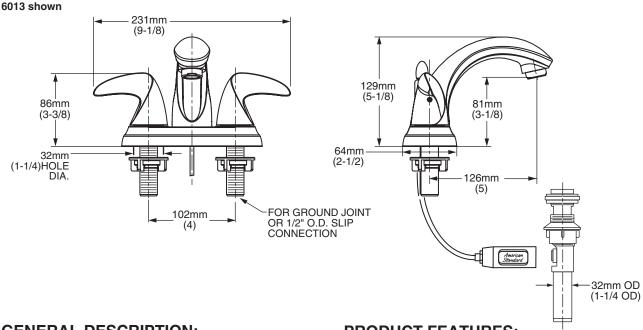

GENERAL DESCRIPTION:

Durable cast brass spout and metal lever handles. Cast brass waterway with one-half inch male inlet shanks. 1/4 turn washerless ceramic disc valve cartridges. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Non-Metallic Speed Connect™ drain body with 1-1/4" (32 mm) tail piece. 2.2 gpm / 8.3 L/min maximum flow rate.

PRODUCT FEATURES:

Cast Brass Construction: Durable. Easy to clean, seamless design. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Exclusive Speed Connect™ Drain

- 1/3 the parts, installs in 1/3 the time.
- No tools or plumbers putty required for installation.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Choice of Finishes: Lifetime finishes won't tarnish or scratch. Lifetime Warranty: On function and finish.

SUGGESTED SPECIFICATION:


4" centerset lavatory faucet shall feature cast brass construction with 1/2" male inlet shanks. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature the Non-Metallic Speed Connect™ Drain with stainless steel cable acuation. Fitting shall be American Standard Model # 6013.

SWAN TWO-HANDLE CENTERSET LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1M CSA B 125 NSF 61/Section 9



	Dun dun d	
- 1	Product Number	Description
][6013	Lavatory faucet with Non-Metallic Speed Connect™ pop-up drain. Metal Lever handles. Chrome finish.



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.