

**SAVONA CORNER™ WHIRLPOOL**☐ **2902.028WC Whirlpool featuring System II**

- Acrylic with fiberglass reinforcement
- EverClean™ whirlpool system featuring Antimicrobial AlphaSan®
- Pre-leveled tub bottom
- Molded-in arm rests
- Molded-in seat
- Faucet deck/accessory area
- 2.0 HP two speed, self-draining pump/motor with pulse feature
- Factory installed power cord with plug
- Eight multi-directional and flow-adjustable jets including:
  - Three Ideal-flow jets
  - Three body massage jets
  - Two recessed back-rest jets
- Deck-mounted, electronic control with 20 minute built-in timed safety shut off and Chrome bezel
- Three silent air volume controls
- Quick Connect Safe-T-Heater connection system
- Factory installed and tested whirlpool system

☐ **2902.028WCGD EverClean™ Whirlpool Massage featuring System II**

- Same as 2902.028WC except with grab bar drilling (grab bar must be ordered separately)

**Nominal Dimensions:**

1480 x 1480 x 572mm  
(58-1/4" x 58-1/4" x 22-1/2")

**Compliance Certifications -****Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

**To Be Specified - Required:**


- ☐ Color: (specify color)
- ☐ Bath Faucet: (specify finish)
- ☐ Rotary Drain: 1583.470 (specify finish)

**To Be Specified - Optional:**

- ☐ Safe-T-Heater\*: 9075.120
- ☐ Grab Bar Kit: 9836.017 (specify finish)
- ☐ System II Control Bezel: 9861.100 (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

\* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

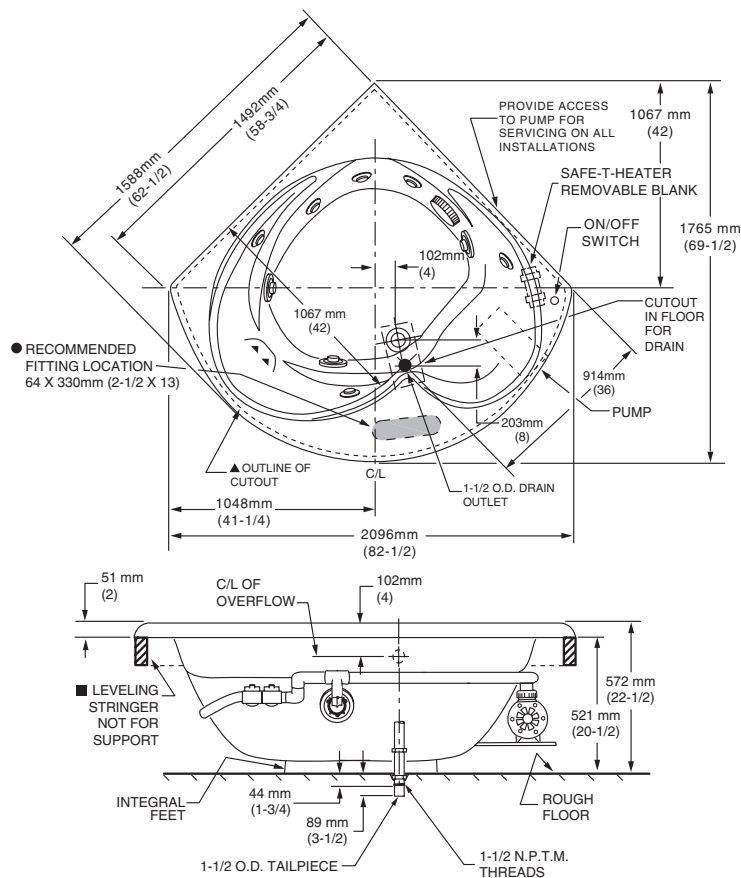

**GENERAL SPECIFICATIONS FOR 2902 WHIRLPOOL**

INSTALLED SIZE \_\_\_\_\_ 82-1/2 x 69-1/2 x 22-1/2 In. (2096 x 1765 x 572mm)  
 WEIGHT \_\_\_\_\_ 144 Lbs. (65 Kg.)  
 WEIGHT w/WATER \_\_\_\_\_ 803 Lbs. (361 Kg.)  
 GAL. TO OVERFLOW \_\_\_\_\_ 79 Gal. (299 L)  
 WHIRLPOOL MIN. OPERATING VOL. \_\_\_\_\_ 73 Gal. (277 L)  
 BATHING WELL AT SUMP \_\_\_\_\_ 38 x 30 In. (965 x 762mm)  
 BATHING WELL AT RIM \_\_\_\_\_ 58 x 55 In. (1473 x 1397mm)  
 WATER DEPTH TO OVERFLOW \_\_\_\_\_ 15-3/4 In. (400mm)  
 FLOOR LOADING \_\_\_\_\_ 33 Lbs./Sq.Ft. (165 Kgs./Sq.m)  
 (PROJECTED AREA)  
 PTS. \_\_\_\_\_ 41.7  
 CUBE (FT³) \_\_\_\_\_ 76.8

**WHIRLPOOL ELECTRICAL SPECIFICATIONS**

SYSTEM II PUMP \_\_\_\_\_ 2.1 HP, 15.6 AMPS, 120V.

**NOTES:**

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIALS BY OTHERS.

OPTIONAL TILING BEAD KIT AVAILABLE.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

**ON SYSTEM II:** CONTROL MODULE TO BE MOUNTED BEHIND ACCESS PANEL, A MINIMUM OF (152mm) 6" ABOVE ROUGH FLOOR.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 / CSA Certified. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.