

REMINISCENCE™ DROP-IN WHIRLPOOL & BATHING POOL

- 2908.018WC Whirlpool featuring System I**
 - Acrylic with fiberglass reinforcement
 - EverClean™ whirlpool system featuring Antimicrobial AlphaSan®
 - Pre-leveled tub bottom
 - Sculptured rim design w/raised headrest
 - Dual, molded-in arm rests
 - Faucet deck/accessory area at drain end
 - 1.5 HP single speed, self-draining pump/motor
 - Factory installed power cord with plug
 - Eight multi-directional and flow-adjustable jets including:
 - Two Ideal-flow jets at foot area
 - Four body massage jets
 - Two recessed back-rest jets
 - Deck-mounted, air switch On/Off
 - Two silent air volume controls
 - Quick Connect Safe-T-Heater connection system
 - Factory installed and tested whirlpool system

- 2908.028WC Whirlpool featuring System II**

Same as 2908.018WC except:

 - 2.0 HP, two speed, self-draining pump/motor with pulse feature
 - Deck-mounted electronic control with 20 minute built-in timed safety shut off and Chrome bezel

- 2908.002 Bathing Pool only**

Nominal Dimensions:

66" x 36" x 24-1/4"
(1676 x 914 x 616mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS



To Be Specified - Required:

- Color:
- Bath Faucet (Specify finish)
- Bath Drain: 1583.470 (Specify finish)



To Be Specified - Optional:

- Safe-T-Heater*: 9075.120
- Jet Trim Ring Kit: 9860.200-two per kit (Specify finish) for Body Massage Jets only
- System II Control Bezel: 9861.100 (Specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

* **NOTE:** the Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

**REMINISCENCE™ DROP-IN
WHIRLPOOL & BATHING POOL
HIGH GLOSS**

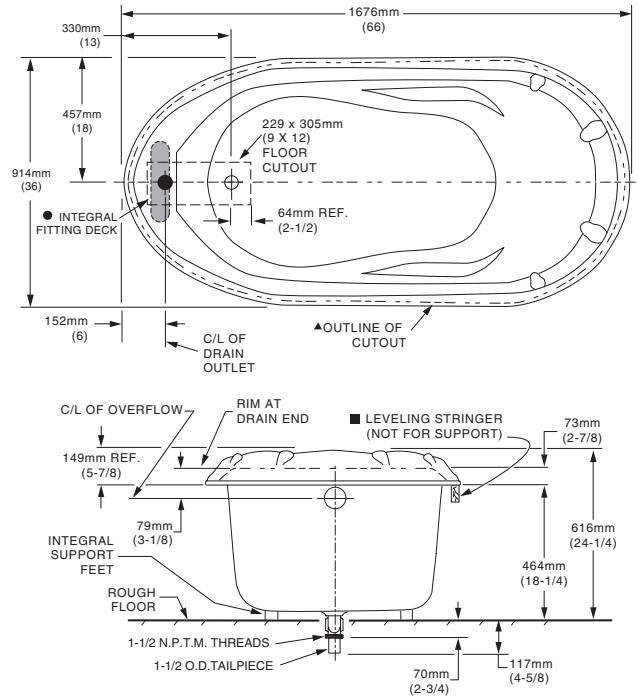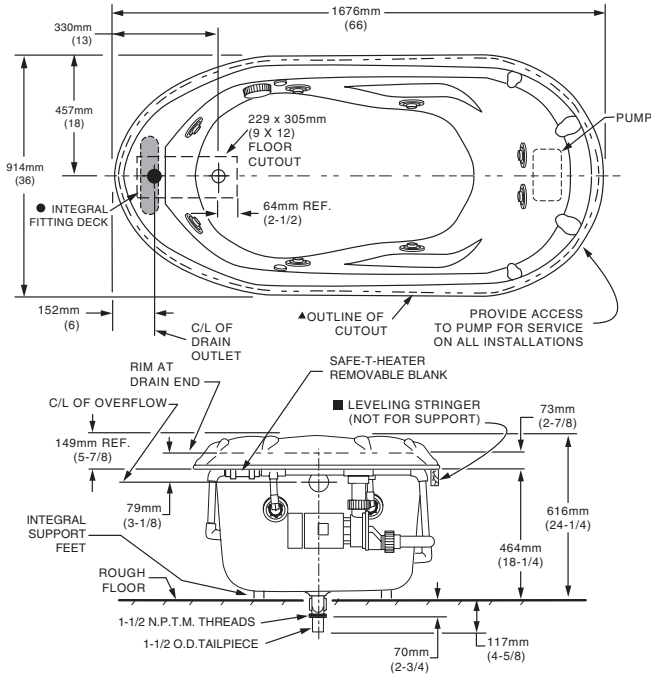

GENERAL SPECIFICATIONS FOR 2908 WHIRLPOOL

INSTALLED SIZE	66 x 36 x 24-1/4 In. (1676 x 914 x 616mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	659 Lbs. (299 Kg.)
GAL. TO OVERFLOW	68 Gal. (257 L.)
MIN. OPERATING GAL.	55 Gal. (208 L.)
BATHING WELL AT SUMP	40 x 18 In. (1016 x 457mm)
BATHING WELL AT RIM	53 x 28 In. (1330 x 718mm)
WATER DEPTH TO OVERFLOW	15 In. (381mm)
FLOOR LOADING (PROJECTED AREA)	40 Lbs./Sq. Ft. (191 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT ³)	44.5

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP	1.6 HP, 9.7 AMPS, 120V.
SYSTEM II PUMP	2.1 HP, 15.6 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2908 BATHING POOL

INSTALLED SIZE	66 x 36 x 24-1/4 In. (1676mm x 914 mm x 616mm)
WEIGHT	95 Lbs. (43 Kg.)
WEIGHT w/WATER	659 Lbs. (299 Kg.)
GAL. TO OVERFLOW	68 Gal. (257 L.)
BATHING WELL AT SUMP	40 x 18 In. (1016 x 457mm)
BATHING WELL AT RIM	53 x 28 In. (1330 x 718mm)
WATER DEPTH TO OVERFLOW	15 In. (381mm)
FLOOR LOADING (PROJECTED AREA)	39 Lbs./Sq. Ft. (187 Kgs/Sq. m.)
PTS.	23.8
CUBE (FT ³)	44.5

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.