



SOLAR BATH™ FOR ABOVE FLOOR ROUGH INSTALLATION

- ☐ **0163.060** Right hand outlet
- ☐ **0165.060** Left hand outlet

Product Features:

- Acid resisting, enameled steel construction
- One-piece bath
- Integral apron
- For above-floor rough installations
- End drain outlet
- Full slip-resistant pattern
- Straight tiling flange
- Fully-bonded support pad

Nominal Dimensions:

1524 x 762 x 445mm
(60" x 30" x 17-1/2")

Bathing Well Dimensions:

1346 x 610 x 337mm
(53" x 24" x 13-1/4")

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.4 for Enameled Steel Plumbing Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities

To Be Specified:

- ☐ Color:
- ☐ Bath Faucet*:
- ☐ Faucet Finish:
- ☐ Drain:

* See faucet section for additional models available

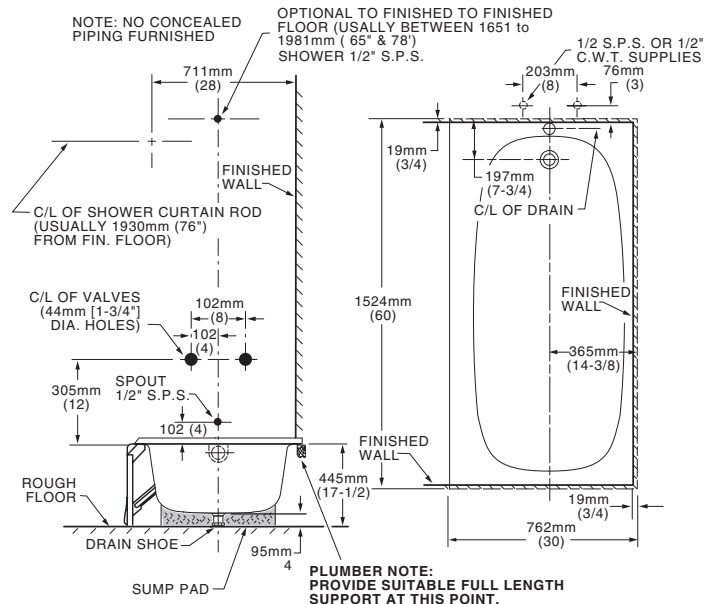

NOTES:

0165.060 LEFT HAND OUTLET (SHOWN).
0163.060 RIGHT HAND OUTLET (REVERSE DIMENSIONS).
SHOWN WITH POP-UP C.D. & O.
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
CONCEALED PIPING NOT INCLUDED.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.
INSTALL WITH SEAT AT HEAD END.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.4. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.