

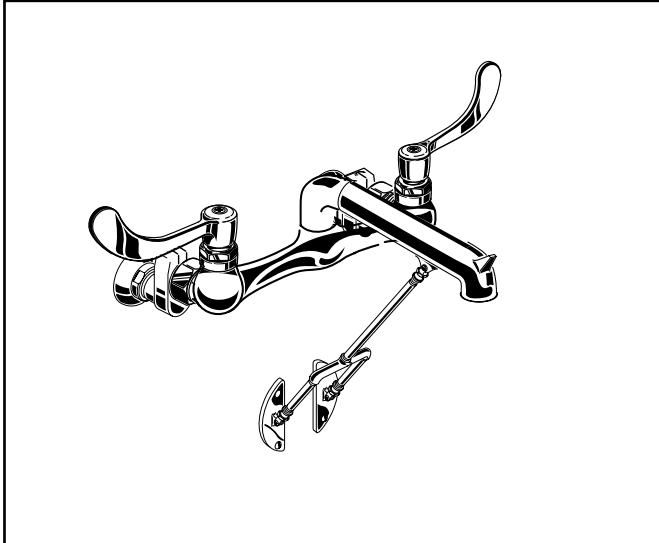


American Standard

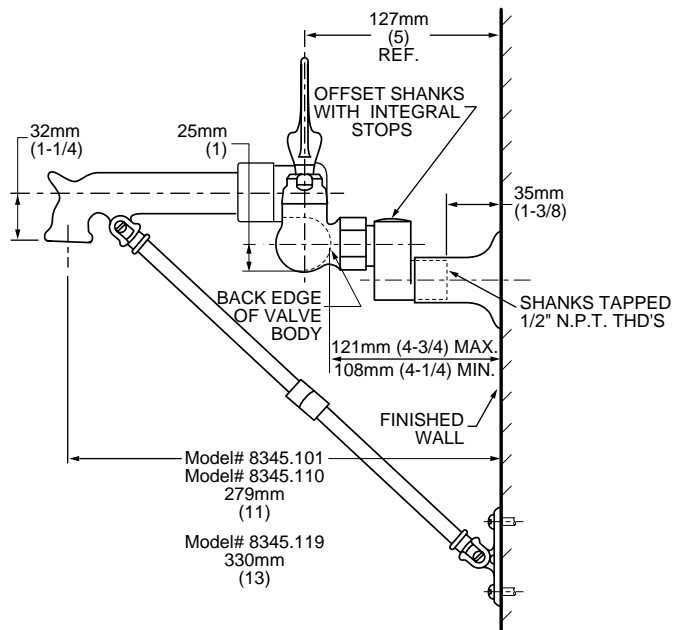

8345.101 Shown.

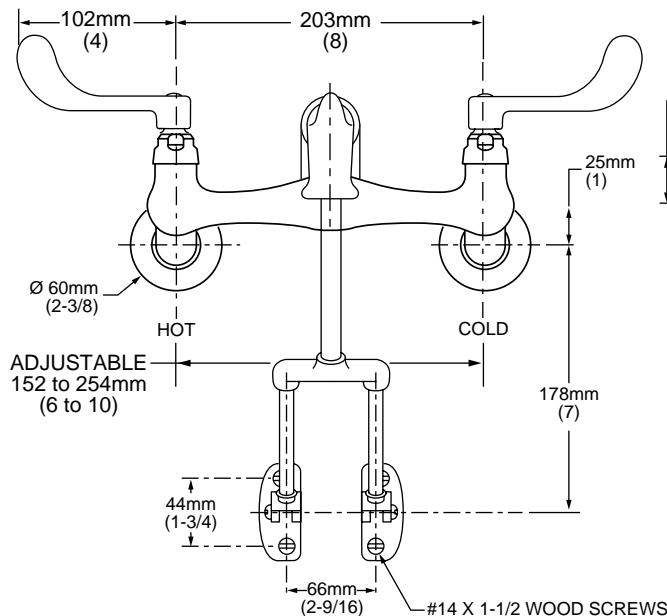

GENERAL DESCRIPTION:

Cast brass body. Brass wrist blade handles with red and blue color indicators. 1/4 turn ceramic disc valve cartridges that are reversible for use on both "hot" and "cold" sides. Brass spout with bucket hook, bottom fork braced to wall. Vacuum breaker (on model 8345.110) prevents backflow. Offset shanks with integral stops. 1/2" female inlets (adjustable from 6" to 10").

PRODUCT FEATURES:

Cast Brass Construction: Durable - Excellent in high use applications.

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Offset Shanks with Integral Stops: Permits easy and convenient access. Adjustable rough in from 6 to 10 inches.

Bottom Brace: Provides additional support.

Polished Chrome: Excellent in commercial applications.

SUGGESTED SPECIFICATION

Exposed yoke wall-mount utility faucet shall feature a cast brass body, brass wrist blade handles, brass spout with bucket hook, bottom brace and stops in shanks. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 8345.____.002.

American Standard


COMMERCIAL

**EXPOSED YOKE WALL
MOUNT UTILITY FAUCET
WITH BOTTOM FORK BRACE**

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1M
CSA B 125
ASSE 1001 (8345.110 ONLY)
ANSI A117.1

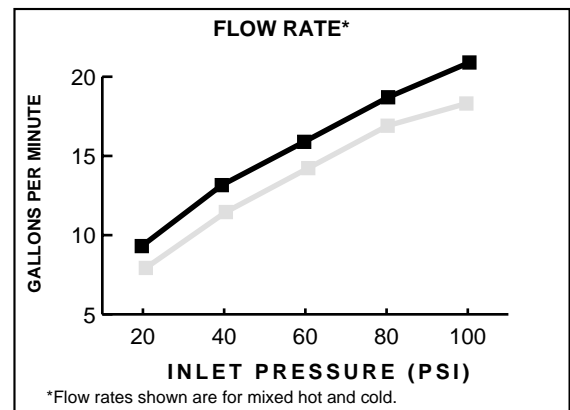

- - Flow rates for 8345.110
- - Flow rates for 8345.101 and 8345.119

Product Number	Description	Finish
		Polished Chrome 002
8345.101	Exposed yoke wall-mount utility faucet. Bottom fork brace. 6" spout with plain end.	
8345.110	Exposed yoke wall-mount utility faucet. Bottom fork brace. 6" spout with threaded end. With Vacuum Breaker	
8345.119	Exposed yoke wall-mount utility faucet. Bottom fork brace. 8" spout with plain end.	



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.