

*American Standard*

## MADERA™ FloWise™ 16-1/2" HEIGHT 1.28 GPF FLUSHOMETER TOILET

 **BARRIER FREE**

### MADERA™ FloWise™ 16-1/2" HEIGHT

- Floor mount flushometer valve toilet
- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High Efficiency (4.8 Lpf/1.28 gpf)
- EverClean™ anti-microbial surface which inhibits the growth of stain and odor causing bacteria, mold, and mildew
- 10" or 12" roughing-in
- 16-1/2" rim height for accessible application
- Condensation channel
- Elongated bowl
- Powerful direct-fed siphon jet action
- Fully glazed 2-1/8" trapway
- 10" x 12" water surface area
- 1-1/2" top spud
- 2 bolt caps
- 100% factory flush tested

- 3461.128** Elongated bowl only, top spud
- 3462.128** Elongated bowl only, top spud with slotted rim for bedpan holding (White only)
- 3465.128** Elongated bowl only, top spud with 4 bolts
- 3466.128** Elongated bowl only, top spud with slotted rim for bedpan holding with 4 bolts (White only)
- 3463.128** Elongated bowl only, back spud
- 3464.128** Elongated bowl only, back spud with slotted rim for bedpan holding (White only)

#### Component Parts:

- 047007-0070A** Inlet spud (furnished with bowl)
- 481310-100** Bolt caps with retainers (furnished with bowl)

#### Nominal Dimensions:

718 x 356 x 419mm  
(28-1/4" x 14" x 16-1/2")

Recommended working pressure—between  
25 psi at valve when flushing and 80 psi static

Fixture only, less seat and flushometer valve

#### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures
- CAN/CSA International B45



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


#### To Be Specified:

- Color:  White  Bone  Silver  Linen
- Seat:
  - American Standard #5901.100 Heavy duty open front less cover
  - American Standard #5905.100 Extra heavy duty open front less cover
- Alternative Seat:
  - Olsonite #95 open front seat less cover
  - Church #9500C open front seat less cover
- Flushometer Valve:
  - American Standard Selectronic™ #6065.121.002 (Top Spud) Available Nov. 1, 2007
  - American Standard Selectronic™ #6065.221.007 (Back Spud) Available Nov. 1, 2007
- Alternative Flushometer Valve:
  - Sloan Crown #111-1.2 (Top Spud)




MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE  
BUILDING FACILITIES - CHECK LOCAL CODES.

3461.128/3462.128/3465.128/3466.128

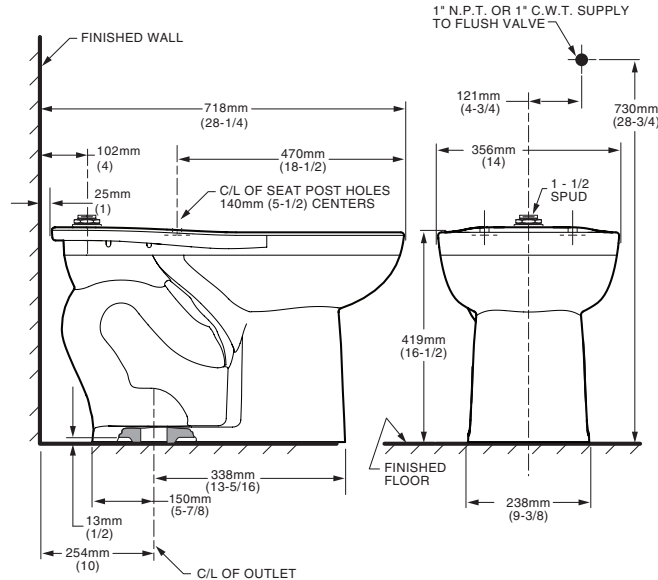

3463.128/3464.128

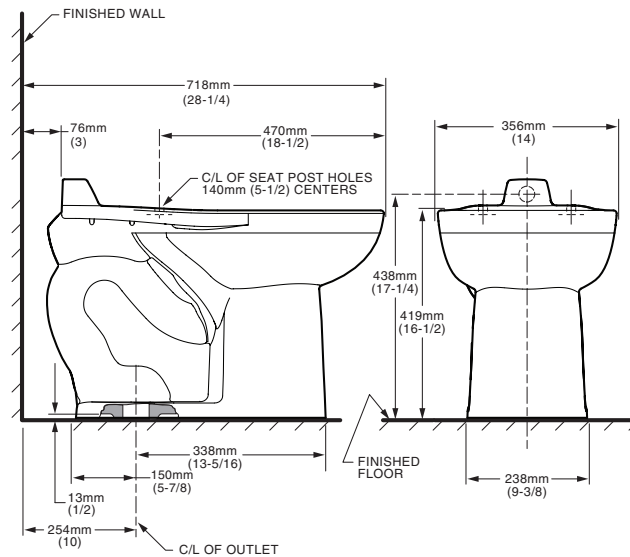

**NOTES:**

PRODUCT 3451.160 AND 3453.160 SHOWN, 3452.160 AND 3455.160 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING. TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSHOMETER VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING. THIS TOILET DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 254MM (10") AND A MAXIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. FLUSHOMETER VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. FLUSHOMETER VALVE REQUIREMENTS FOR 12" (305MM) ROUGH-IN: SWEAT EXTENSION NIPPLE IS REQUIRED. REFER TO VALVE MANUFACTURER AND LOCAL CODES.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.