




EXPOSED

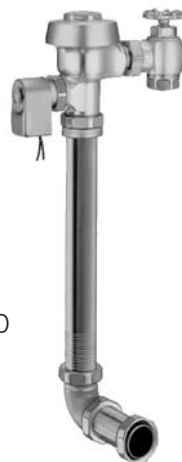

CONCEALED

ES Variation Solenoid Operator

Description

Sloan Royal® and Regal® Flushometers can be ordered with an optional “ES” Solenoid Operator. Model “ES” Flushometers are activated remotely by an electric push button. Sloan Royal and Regal “ES” Flushometers offer solutions for installations that require automatic, remote or other Flushometer control requirements.

Alternative “ES” installations include:

- Urinal trough installations
- Replacement of old motor operated valve
- Remote electric push button operation
- Control of flushometers by other electronic devices

The “ES” Flushometer Variation can be used for both exposed and concealed installations. Exposed “ES” Flushometers include Chrome Plated Wall Cover Plate (for 2-gang electrical box) with Vandal Resistant Screws.


Variations

- ☐ 24 VAC Solenoid Operator
- ☐ 120 VAC Solenoid Operator
- ☐ ESM — Modular Plug Solenoid Lead (24 VAC only)
(For use with Sloan Programmed Water Technologies Microplumb Control Systems)

Accessories

- ☐ **EL-172-A** Electric Push Button

For information on Optima Sensor Operated Flushometers see the OPTIMA Flushometers section of the Sloan catalog.

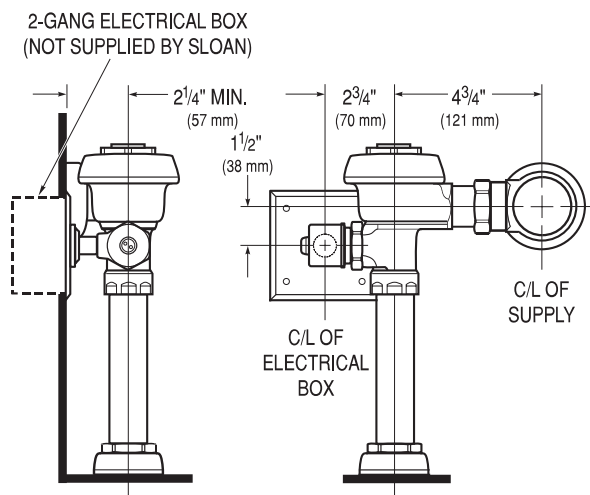

**Typical Exposed “ES” Flushometer installation
(Water Closet or Urinal).**



Listed

This space for Architect/Engineer approval

Job Name _____ Date _____

Model Specified _____ Quantity _____

Variations Specified _____

Customer/Wholesaler _____

Contractor _____

Architect _____

The information contained in this document is subject to change without notice.

SLOAN®

Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131
Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380

www.sloanvalve.com