

INSTALLATION INSTRUCTIONS MULTI-PACK AC ADAPTER FOR ESD SERIES SOAP DISPENSERS

Installation Instructions

Each Multi-Pack AC Adapter is designed to power up to four (4) ESD-200/250/300/350 Soap dispensers.

Step 1

Disconnect and remove the battery packs from battery powered Model ESD-250/350 Soap Dispensers, if applicable.

Step 2

Determine the mounting location for the Multi-Pack Adapter Box and AC Wall Adapter. Make certain that cable lengths of the AC Adapter (6 ft/1829 mm) and Wire Assemblies (5 ft/1524 mm) will reach their respective connections.

Step 3

Attach the Multi-Pack Adapter Box to the desired surface using the Wall Mounting Anchors or double-sided Adhesive Pad.

Step 4


Plug the Three-prong Connector end of the Wire Assembly into one of the Multi-Pack Adapter Box receptacles. Connect the remaining end with the Bayonet Connector into the ESD-200/250/300/350 Soap Dispenser. Be sure to secure the Bayonet power connection with the thumbnut. Follow the previous instructions for connecting up to three (3) additional ESD-200/250/300/350 Soap Dispensers.

Step 5

Plug the AC Wall Adapter into the 120 VAC Wall Receptacle. The ESD-200/250/300/350 Soap Dispensers are now ready for operation.


If further assistance is required, contact your nearest Sloan Representative office or the Sloan Installation Engineering Department at:

1-888-SLOAN-14 (1-888-756-2614)

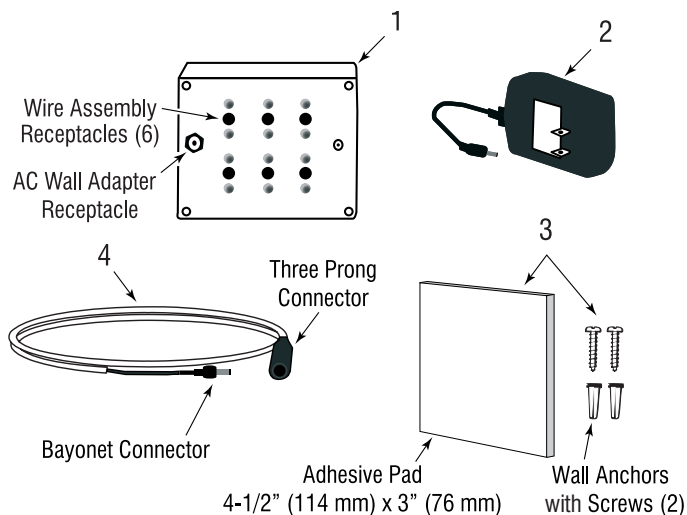

Important: The Multi-Pack AC Adapter is not compatible with any Sloan Optima or Optima Plus faucets.

ESD-236 and ESD-237 Multi-Pack AC Adapter

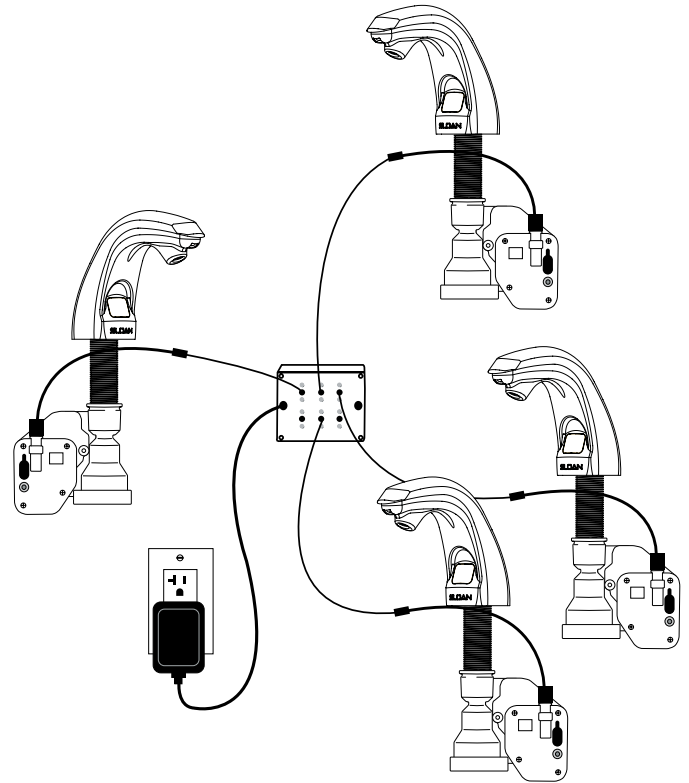

Parts List

Item #	Part #	Description
1.	ESD-236	Multi-Pack Adapter Box (includes Item #'s 2 and 3) Physical Dimensions: 5" (127 mm) Wide x 3-3/8" (86 mm) High x 2-1/4" (57 mm) Deep
2.	—	AC Wall Adapter with 6' (1829 mm) Cord (included with Item #1) Physical Dimensions: 3-1/8" (79 mm) Wide x 2-1/8" (54 mm) High x 1-1/2" (38 mm) Deep
3.	—	Mounting Kit, includes two (2) Wall Anchors with Screws and one (1) 4 1/2" (114 mm) x 3" (76 mm) Adhesive Pad (included with Item #1)
4.	ESD-237	Wire Assembly with Bayonet Connector (5' /1524 mm)

The information contained in this document is subject to change without notice.