

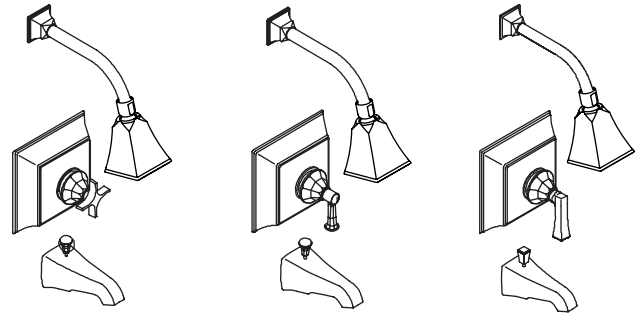
Features

- Metal construction
- Available with cross or lever handles
- Intended for use with Rite-Temp or HiFlow Rite-Temp valves

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- ADA






Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Separate Trim and Rite-Temp Valve: For complete valve, both valve trim and Rite-Temp valve must be specified.





Model	Description		 ADA	 ADA
K-T461-3S	Bath/shower trim, cross hndl	<input type="checkbox"/> CP <input type="checkbox"/> Other _____		
K-T461-4S	Bath/shower trim, faceted lever hndl		<input type="checkbox"/> CP <input type="checkbox"/> Other _____	
K-T461-4V	Bath/shower trim, deco lever hndl			<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-T462-3S	Shower trim only, cross hndl	<input type="checkbox"/> CP <input type="checkbox"/> Other _____		
K-T462-4S	Shower trim only, faceted lever hndl		<input type="checkbox"/> CP <input type="checkbox"/> Other _____	
K-T462-4V	Shower trim only, deco lever hndl			<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-T463-3S	Valve trim only, cross hndl	<input type="checkbox"/> CP <input type="checkbox"/> Other _____		
K-T463-4S	Valve trim only, faceted lever hndl		<input type="checkbox"/> CP <input type="checkbox"/> Other _____	
K-T463-4V	Valve trim only, deco lever hndl			<input type="checkbox"/> CP <input type="checkbox"/> Other _____

Product Specification

Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be of metal construction. Bath and shower trim shall include showerhead with arm and flange, 6" (15.2 cm) diverter spout with NPT connection, and faceplate with handle. Shower only trim shall include showerhead with arm and flange, and faceplate with handle. Valve only trim shall include faceplate with handle. Faucet trim shall be K-T____-____-____ and Rite-Temp valve shall be K-304-____-NA OR K-306-KS-NA HiFlow Rite-Temp valve.

MEMOIRS® STATELY

Technical Information

Required Accessory					
K-304-K	Rite-Temp valve without stops, NPT connections	<input type="checkbox"/> NA			
K-304-KS	Rite-Temp valve with stops, NPT connections		<input type="checkbox"/> NA		
K-304-KP	Rite-Temp valve with PVC connections			<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp valve with stops, NPT conn.				<input type="checkbox"/> NA

Optional Accessory:	
HiFlow Rite-Temp thin wall installation kit*	88526
* Required when using the K-306-KS valve in a fiberglass or acrylic installation.	


Install the Rite-Temp valve according to the valve installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

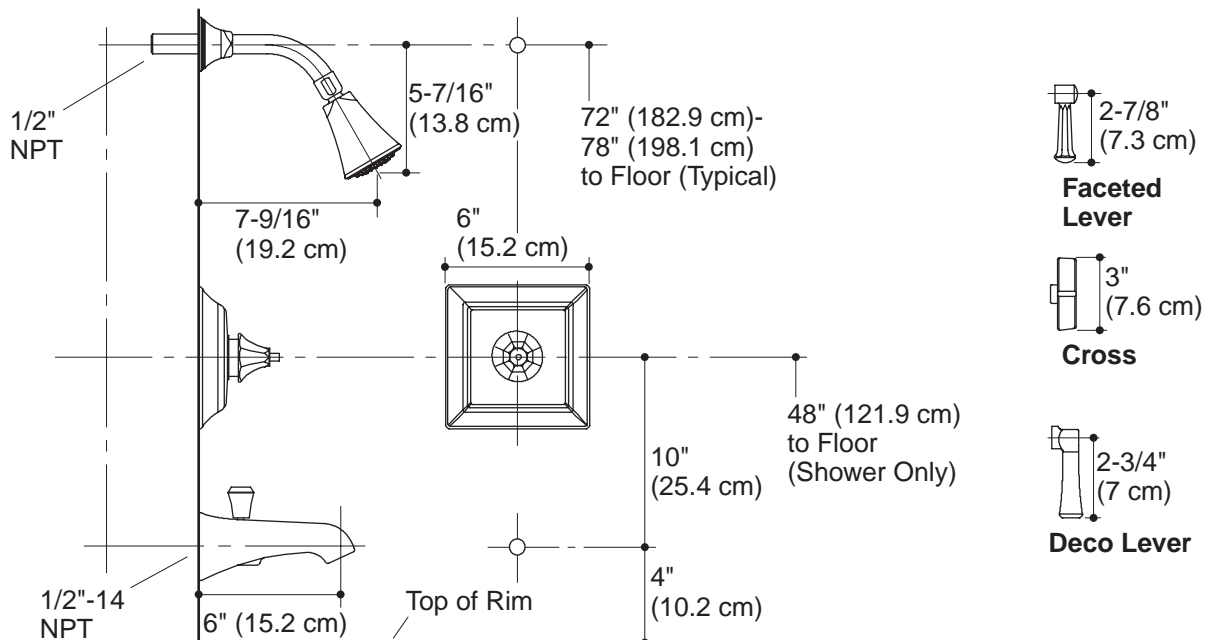
Cap shower outlet if deck-mounted spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.

Installation Notes

 **WARNING: Risk of damage to the K-306-KS valve assembly.** When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).

Install this product according to the installation guide.



Product Diagram