

MEMOIRS® CLASSIC

Features

- Brass construction
- Available with cross or lever handles
- Intended for use with Rite-Temp® or HiFlow Rite-Temp® valves (trim only)

BATH AND SHOWER FAUCET TRIM

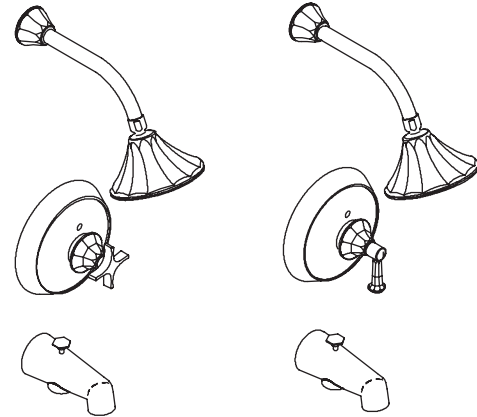
K-T464

ALSO K-T465, K-T466

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- CSA International
- ADA





Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable




Specified Model

For complete faucet, both faucet trim and Rite-Temp® valve must be specified.					
Model	Description			ADA	
K-T464-3C	Bath and shower trim, cross handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____		
K-T464-4C	Bath and shower trim, lever handle			<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T465-3C	Shower only trim, cross handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____		
K-T465-4C	Shower only trim, lever handle			<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T466-3C	Valve only trim, cross handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____		
K-T466-4C	Valve only trim, lever handle			<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Product Specification

Rite-Temp® pressure-balancing single-control bath and shower faucet trim shall be of brass construction. Faucet trim shall be available with either cross or lever handles. Faucet trim shall be Kohler Model K-_____-_____-_____ and Rite-Temp® valve shall be K-304-_____-NA OR K-306-KS-NA HiFlow Rite-Temp® valve.

MEMOIRS® CLASSIC

Required Accessories				
K-304-K	Rite-Temp® valve without stops OR	<input type="checkbox"/> NA		
K-304-KS	Rite-Temp® valve with stops OR		<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp® valve with integral stops			<input type="checkbox"/> NA

Recommended Accessories			
88526	HiFlow Rite-Temp® thin wall installation kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Optional Accessories			
73418	Deep roughing-in kit for Rite-Temp® valve (all handles)	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Installation Notes



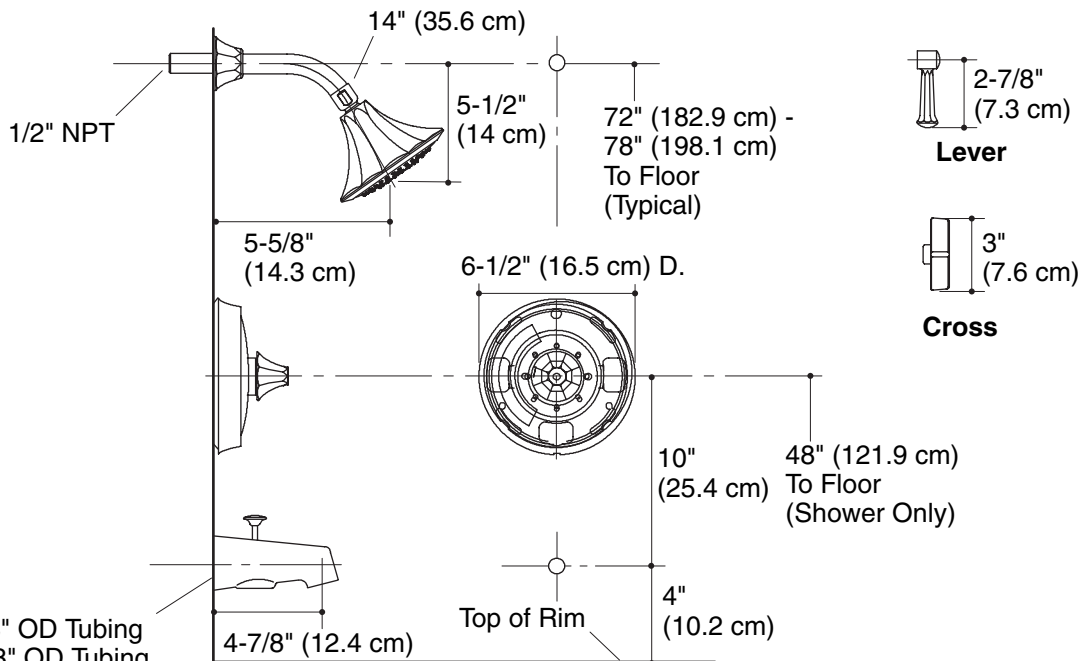
WARNING: Risk of damage to the K-306-KS valve assembly. When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.



1/2" NPT Pipe or 5/8" OD Tubing For Slip-fit Spout, 5/8" OD Tubing Must Extend 1-1/2" (3.8 cm) Min-2-7/8" (7.3 cm) Max Beyond Finished Wall. For NPT Spout, Pipe Must Extend 3-7/8" (9.8 cm) Beyond Finished Wall.

Product Diagram