


Features

- Intended for use with Rite-Temp or HiFlow Rite-Temp valves
- Brass construction
- 4-7/8" (12.4 cm) diverter spout with NPT connection
- Variety of handle style options

BATH AND SHOWER FAUCET TRIM
K-T8224, K-T8226
ALSO K-T8228, K-304, K-306-KS

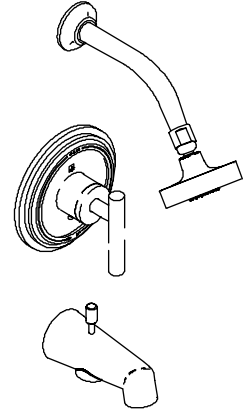

Codes/Standards Applicable



Specified model meets or exceeds the following:




- ASME A112.18.1
- CSA B125
- IAPMO/UPC
- ASSE 1016
- ADA

Colors/Finishes

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	 <input type="checkbox"/> ADA	 <input type="checkbox"/> ADA
K-T8224-4	Bath and shower trim with lever handle	<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____	
K-T8224-4A	Bath and shower trim with swirl lever handle		<input type="checkbox"/> CP <input type="checkbox"/> PB
K-T8226-4	Shower only trim with lever handle	<input type="checkbox"/> CP <input type="checkbox"/> PB <input type="checkbox"/> Other_____	
K-T8226-4A	Shower only trim with swirl lever handle		<input type="checkbox"/> CP <input type="checkbox"/> PB
K-T8228-4	Valve only trim with lever handle	<input type="checkbox"/> CP <input type="checkbox"/> PB	
K-T8228-4A	Valve only trim with swirl lever handle		<input type="checkbox"/> CP <input type="checkbox"/> PB

Required Accessory				
K-304-K	Rite-Temp™ valve without stops	<input type="checkbox"/> NA		
K-304-KS	Rite-Temp™ valve with stops		<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp™ valve with integral stops			<input type="checkbox"/> NA

Product Specification

Rite-Temp™ pressure-balancing single-control bath and shower faucet trim shall be of brass construction. Bath and shower trim shall include showerhead with arm and flange, 4-7/8" (12.4 cm) diverter spout with NPT connection, and faceplate with handle. Shower only trim shall include showerhead with arm and flange, and faceplate with handle. Valve only trim shall include faceplate with handle. Faucet trim shall be K-T____-____-____ and Rite-Temp™ valve shall be K-304-____-NA OR K-306-KS-NA HiFlow Rite-Temp™ valve.

TABORET®

Technical Information

Applicable faucet trim:	
Bath and shower trim with lever handle*	K-T8224-4
Bath and shower trim with swirl lever handle*	K-T8224-4A
Shower only trim with lever handle*	K-T8226-4
Shower only trim with swirl lever handle*	K-T8226-4A
Applicable valve trim only:	
With lever handle*	K-T8228-4
With swirl lever handle*	K-T8228-4A
* Rite-Temp™ valve must be ordered to complete faucet.	
Handles are ADA compliant.	ADA

Applicable Rite-Temp™ valve:		
Without stops	K-304-K-NA	not shown**
With stops	K-304-KS-NA	not shown**
HiFlow valve with integral stops	K-306-KS-NA	not shown**
** Valve system required for configuration illustrated.		

Installation Notes


WARNING: Risk of damage to the K-306-KS valve assembly. When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).

Install this product according to the installation guide.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mounted spout, diverter, or handshower is connected to the spout outlet.

Install straight pipe or tube drop of 7" (17.8 cm) to 18" (45.7 cm) with single elbow between valve and wall-mount spout.

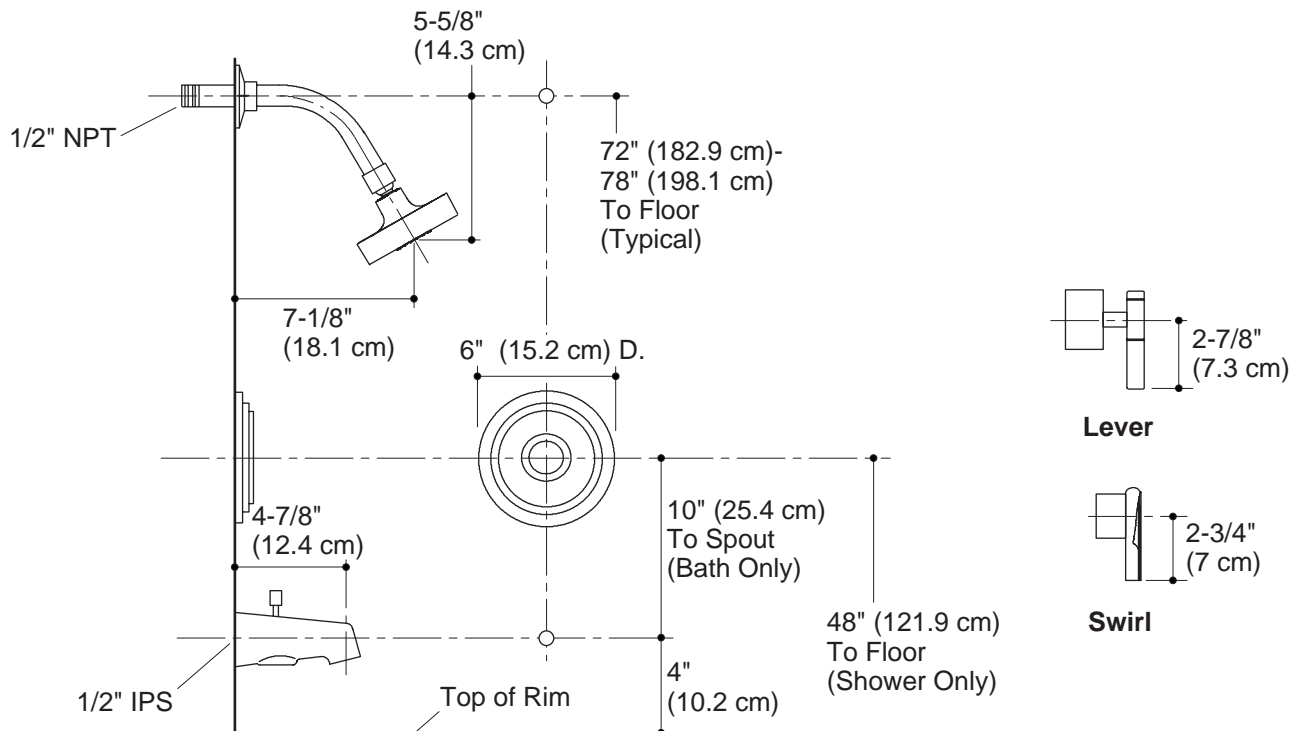

Product Diagram