

Features

- Acrylic
- Drop-in or three-wall alcove
- Optional K-1491 removable bath pillow
- Optional K-1284 separate apron
- Molded lumbar support
- 60" (152.4 cm) x 32" (81.3 cm) x 18-1/8" (46 cm)


ACRYLIC BATH
K-1107
 ALSO K-1107-L/R

ADA

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ANSI Z124.1.2
- IAPMO/UPC
- CSA B45.0
- CSA B45.5
- CSA International

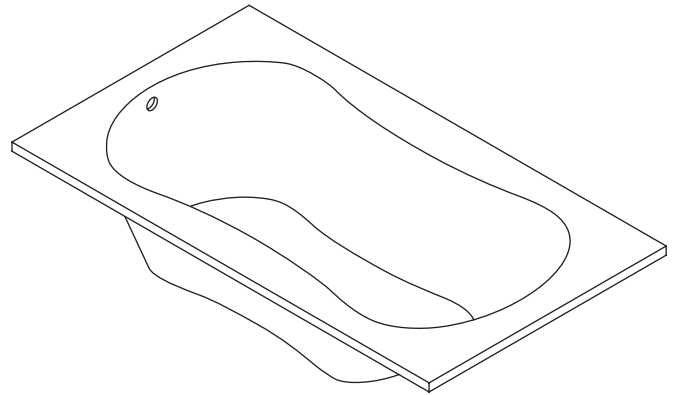

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1107	Bath, drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1107-L	Bath, left drain, title flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1107-R	Bath, right drain, title flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
Recommended Accessories			
K-11677	Trip lever drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB
Optional Accessories			
K-1284	Separate apron with removable panel for front access	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 18-1/8" (46 cm) in height. The bath shall be drop-in or three wall alcove installation. The bath shall have molded lumbar supports. The bath shall have an optional K-1284 separate apron, and an optional K-1491 removable bath pillow. The bath shall be Kohler Model K-1107-_____-_____.

PROFLEX® 6032

Technical Information

Fixture*:	
Basin area:	
Bathing well	46" (116.8 cm) x 20" (50.8 cm)
Top area	55" (139.7 cm) x 22" (55.9 cm)
To overflow:	
Water depth	12-1/2" (31.8 cm)
Capacity	49 gal (185.5 L)
Weight	38 lbs (17.2 kg)
* Approximate measurements for comparison only.	

Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 80 lbs/square foot (390 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Product Diagram