

# KOHLER® Roughing-In

K-1107, K-1107-L/R  
PROFLEX® 6032  
ACRYLIC BATH

## Product Information

Applicable product:	
Bath, drop-in	K-1107
Bath, left drain, tile flange	K-1107-L
Bath, right drain, tile flange	K-1107-R
Product will comply with the Americans with Disabilities Act when installed per the requirements of the Accessibility Guidelines, Section 607 Bathtubs, of the Act.	

Recommended accessories:	
Drain	K-11677

Fixture*:	
Basin area:	
Bathing well	46" (116.8 cm) x 20" (50.8 cm)
Top area	55" (139.7 cm) x 22" (55.9 cm)
To overflow:	
Water depth	12-1/2" (31.8 cm)
Capacity	49 gal (185.5 L)
Weight	38 lbs (17.2 kg)
Drop-in cut-out	58-1/2" (148.6 cm) x 30-1/2" (77.5 cm)
* Approximate measurements for comparison only.	

Optional accessories:	
Separate apron with removable panel for front access	K-1284
Pillow	K-1491


## Installation Notes

Install this product according to the installation guide.

Floor support under bath must provide for a minimum of 36 lbs/square foot (173 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

This fixture conforms to ANSI Standard Z124.1.2. All dimensions are nominal.

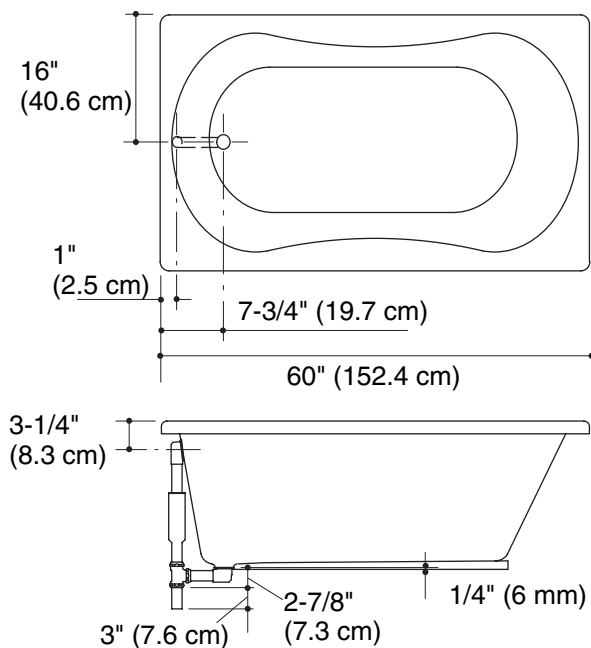

No change in measurements if connected with drain illustrated. (K-11677 or K-11677M)

