


Features

- CleanCoat™ glass coating
- Heavy gauge aluminum framed construction
- For use with standard or steam shower applications
- Available with or without operating transom
- French door design
- Installs with right or left door opening first
- 1/4" (6 mm) clear tempered glass
- 1-1/2" (3.8 cm) of adjustability
- 72" (182.9 cm) doors fit 72" (182.9 cm) Fountainhead receptors
- 60" (152.4 cm) doors fit 60" (152.4 cm) Fountainhead receptors

FRAMED PIVOT SHOWER DOOR K-705771

ALSO K-705772, K-705773, K-705774

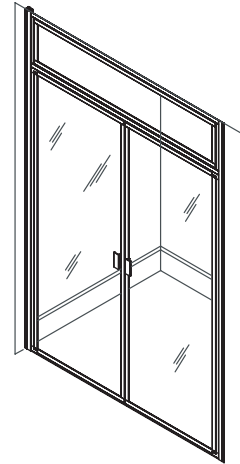

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)

Glass Options

- L: Clear

Frame Finishes/Colors:

- SS: Satin Silver

Specified Model

Model	Description	Glass Options	Frame Finishes/Colors
K-705771	60" (152.4 cm) French shower door	<input type="checkbox"/> L	<input type="checkbox"/> SS
K-705772	72" (182.9 cm) French shower door	<input type="checkbox"/> L	<input type="checkbox"/> SS
K-705773	60" (152.4 cm) French shower door with transom	<input type="checkbox"/> L	<input type="checkbox"/> SS
K-705774	72" (182.9 cm) French shower door with transom	<input type="checkbox"/> L	<input type="checkbox"/> SS



Product Specification

The framed pivot shower door shall have heavy-gauge aluminum framed construction for use with standard or steam shower applications. The door shall have 1/4" (6 mm) clear tempered glass, CleanCoat glass coating, and 1-1/2" (3.8 cm) of adjustability. The door shall be available with or without operating transom. The door shall have french door design and shall install with right or left door opening first. The door shall be Kohler Model K-_____-L-SS.

FOUNTAINHEAD™

Installation Notes

Install this product according to the installation guide.

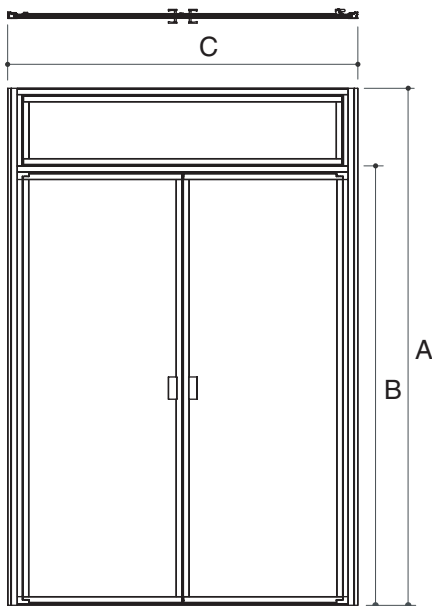

	A (Min - Max)	B (Min - Max)	C (Min - Max)
K-705771	74-5/16" (188.8 cm) - 74-5/8" (189.5 cm)*		57-1/2" (146.1 cm) - 59" (149.9 cm)
K-702772	74-5/16" (188.8 cm) - 74-5/8" (189.5 cm)*		69-1/2" (176.5 cm) - 71" (180.3 cm)
K-702773		87-3/8" (221.9 cm) - 87-3/4" (222.9 cm)	57-1/2" (146.1 cm) - 59" (149.9 cm)
K-702774		87-3/8" (221.9 cm) - 87-3/4" (222.9 cm)	69-1/2" (176.5 cm) - 71" (180.3 cm)

*If unit is not a steam unit, door can be installed in any opening greater than 74-5/16" (188.8 cm).

Product Diagram