

Features

- CleanCoat™ glass coating
- Center-guided door panel mechanism for smooth, quiet sliding action and easy cleaning
- Out-of-plumb adjustability allows for easy installation
- Stainless steel hardware prevents rusting or corrosion
- Smooth, easy-to-clean wall jambs
- Gently curved inside and outside towel bar
- 3/8" (1 cm) thick tempered glass


Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)

BYPASS BATH/SHOWER DOORS K-702205

ALSO K-702207, K-702209

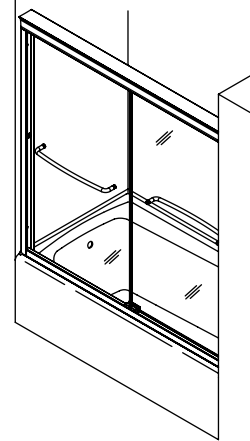

Glass Options

- L: Clear

Frame Finishes/Colors:

- BH: Bright Brass
- SHP: Polished Silver
- NX: Brushed Nickel
- ABV: Brushed Bronze

Specified Model

Model	Application	Glass Options	Frame Finishes/Colors			
K-702205	Bath	<input type="checkbox"/> L	<input type="checkbox"/> BH	<input type="checkbox"/> SHP	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-702207	Shower	<input type="checkbox"/> L	<input type="checkbox"/> BH	<input type="checkbox"/> SHP	<input type="checkbox"/> NX	<input type="checkbox"/> ABV
K-702209	Shower	<input type="checkbox"/> L	<input type="checkbox"/> BH	<input type="checkbox"/> SHP	<input type="checkbox"/> NX	<input type="checkbox"/> ABV

Product Specification


Bypass bath and shower door shall have 3/8" (1 cm) thick tempered glass and CleanCoat glass coating. Door shall have out-of-plumb adjustability for easy installation, stainless steel hardware to prevent rusting or corrosion, and gently curved inside and outside towel bar. Door shall have smooth, easy-to-clean wall jambs. Door shall have a center-guided door panel mechanism for smooth, quiet sliding action and easy cleaning. Shower door shall be Kohler Model K-_____-L-_____.

FLUENCE®

Installation Notes

Install this product according to the installation guide.

Model	A (Max)	B	C (Walk Through)
K-702205	59-5/8" (151.4 cm)	58-5/16" (148.1 cm)	27-7/8" (70.8 cm)
K-702207	59-5/8" (151.4 cm)	70-5/16" (180.2 cm)	27-7/8" (70.8 cm)
K-702209	47-5/8" (121 cm)	70-5/16" (180.2 cm)	21-7/8" (55.6 cm)

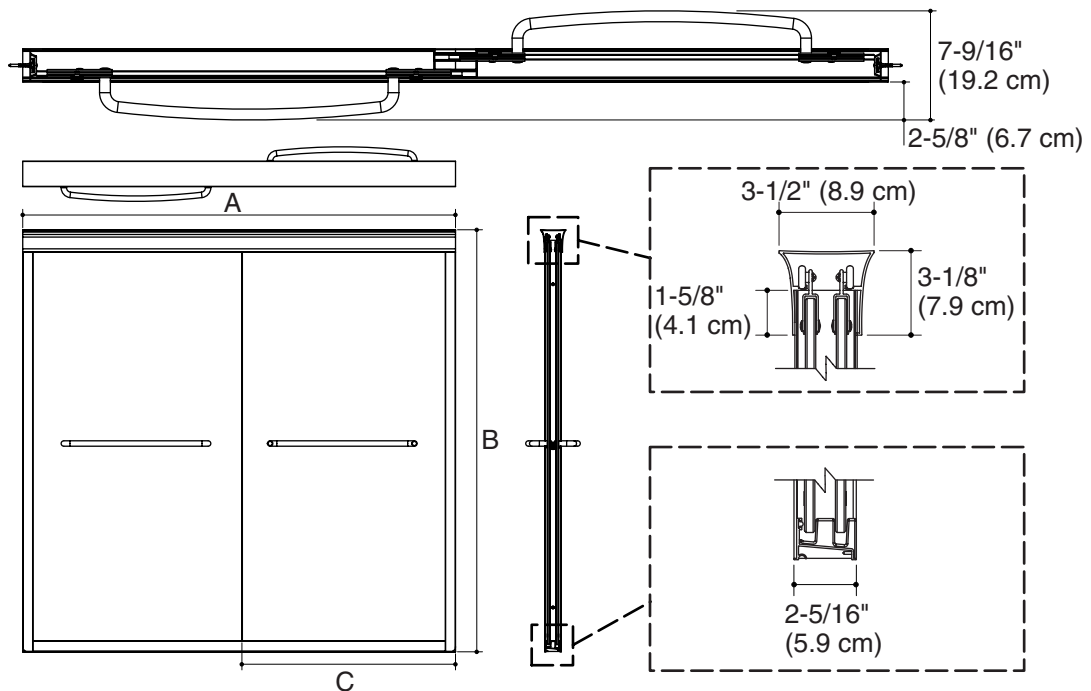

Product Diagram