

### Features


- 19-3/8" (49.2 cm) x 14-3/8" (36.5 cm)
- Self-rimming
- 20 gauge stainless steel
- Satin finish with Hushcoat undercoat (-S)
- Mirror finish with Hushcoat undercoat (-M)
- Installation hardware included
- Without overflow
- Chrome plated brass tube and gasket included to cover the overflow hole in the drain assembly

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.3
- CSA B45

## OVAL LAVATORY K-2605

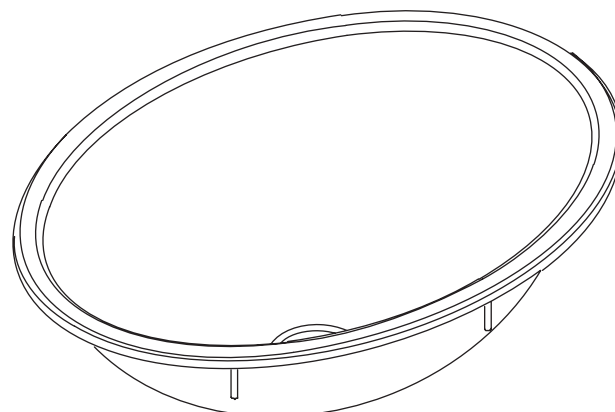

### Colors/Finishes

- NA: None applicable

#### Accessories:

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-2605-S	Satin finish with Hushcoat undercoat lavatory	<input type="checkbox"/> NA	
K-2605-M	Mirror finish with Hushcoat undercoat lavatory	<input type="checkbox"/> NA	
Recommended Accessories			
K-8998	P-trap	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
Included Accessories			
63034	Adhesive sealant		
33507	Drain gasket		
62603	Tube		
56655	Basin clamp assembly		

### Product Specification

The oval lavatory shall be 19-3/8" (49.2 cm) in length, and 14-3/8" (36.5 cm) in width. Lavatory shall be made of 20 gauge stainless steel. Lavatory shall be a self-rimming installation. Lavatory shall have a satin finish with Hushcoat undercoat (-S) or a mirror finish with Hushcoat undercoat (-M). Lavatory shall have a chrome plated brass tube and drain gasket to cover the overflow hole in the faucet drain assembly and include any installation hardware. Lavatory shall be Kohler Model K-2605-\_\_\_\_\_-\_\_\_\_\_.

# SAMBA™

## Technical Information

Fixture:*	basin area	water depth
Lavatory	17-3/4" (45.1 cm) x 12-3/4" (32.4 cm)	5-7/8" (14.9 cm)
Drain hole	1-5/8" (4.1 cm) D.	
* Approximate measurements for comparison only.		



Included Components:	
Basin clamp assembly	7259
Drain gasket	33507
Tube	1011037-CP
Cut-out template	1015186-7

## Installation Notes

Install this product according to the installation guide.

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.3.

The supplied basin clamp assembly requires 1/2" (1.3 cm) minimum countertop thickness. Installer must supply anchors for thinner countertops.

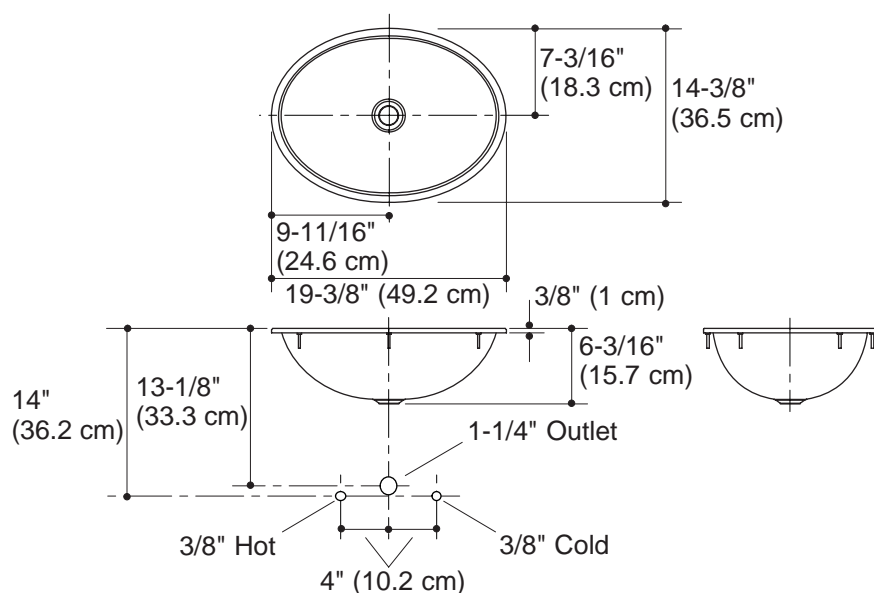

## Product Diagram