

WELLSPRING™

**TOUCHLESS FAUCET
K-10103
ALSO K-10104**

ADA


Features

- Brass construction
- 4" (10.2 cm) spout length
- Single-hole mounting
- Below-counter battery and valve location
- 31" (78.7 cm) length flexible supply hoses from the valve body to the supply stops
- Operated by a 2CR5 6 V lithium-ion battery
- Available in traditional or contemporary styling
- Electronic infrared sensor with Tripoint™ technology for accurate activation
- 34" (86.4 cm) flexible supply hose from the base of the faucet to the valve outlet
- 1.5 gallons (5.7 L) per minute flow rate [maximum at 60 psi (4.14 bar)]

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- ADA
- NSF 61

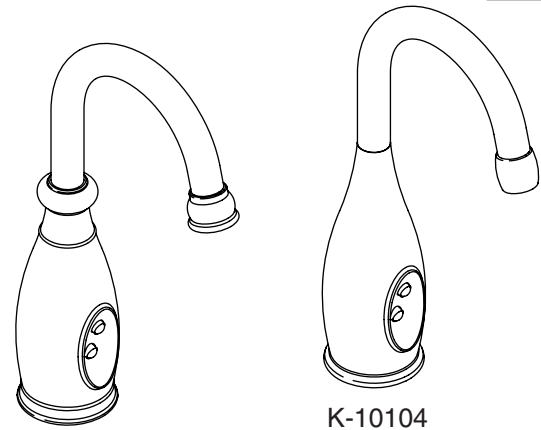

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes
K-10103	Traditional faucet	<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-10104	Contemporary faucet	<input type="checkbox"/> CP <input type="checkbox"/> Other _____

PRODUCT SPECIFICATION


Single-hole mount touchless faucet shall be of brass construction. Faucet shall have a 4" (10.2 cm) spout length, maximum 1.5 gallons (5.7 L) per minute flow rate [maximum at 60 psi (4.14 bar)], and electronic infrared sensor with Tripoint™ technology for accurate activation. Faucet shall feature below-counter battery and valve location. Product shall include a 34" (86.4 cm) flexible supply hose from the base of the faucet to the valve outlet and 31" (78.7 cm) length flexible supply hoses from the valve body to the supply stops. Faucet shall be operated by a 2CR5 6 V lithium-ion battery. Product shall be available in traditional or contemporary styling. Faucet shall be Kohler Model K-____-____.

WELLSPRING™

Installation Notes

Install this product according to the installation guide.

Product requires a 2CR5 6 V lithium-ion battery (supplied) to operate.

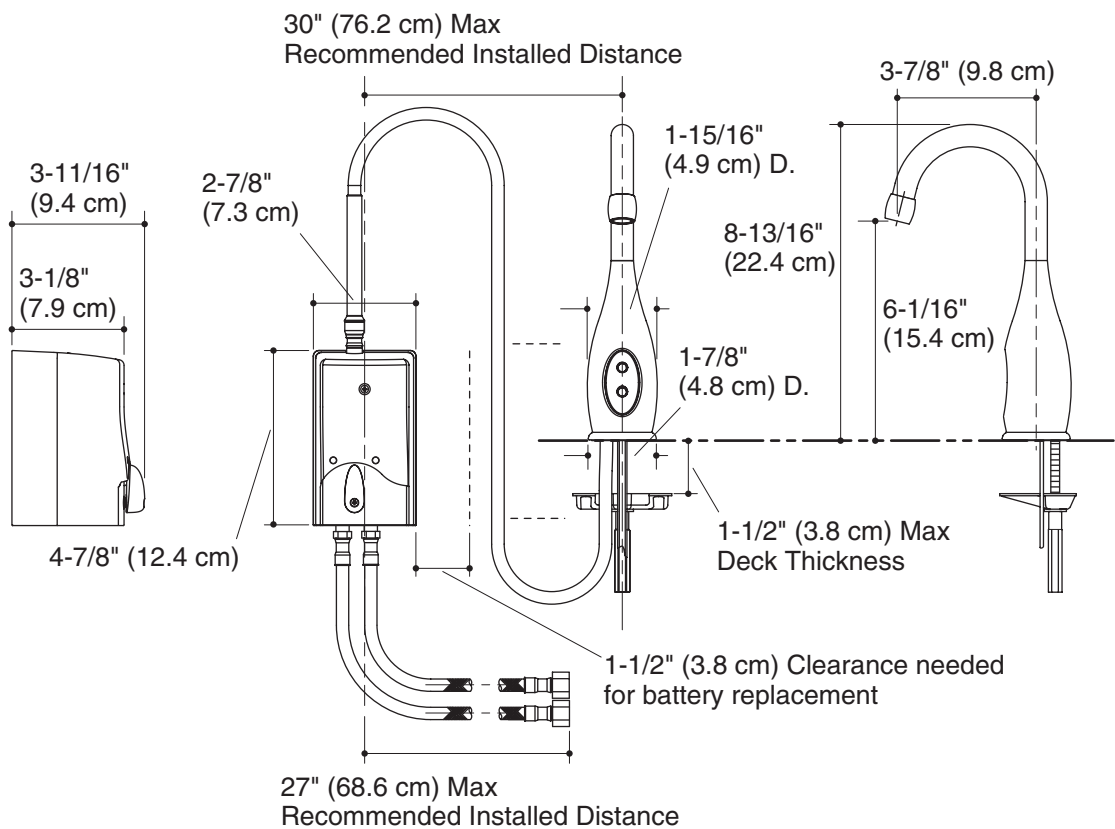

Product Diagram