





ADA halcyon sconce	series#	lamping	dimensions	diffuser	finishes	options
	2-5130	1 x 24W Twin 4-pin fluorescent (2G11)*	W = 6.88" H = 16.25" D = 4"	2 matte white acrylic 9 faux alabaster acrylic	24 satin nickel	

general specifications

- Machined steel trim.
 - Cold rolled steel housing.
 - Fluorescent units include acrylic top lens.
 - Acrylic diffusers are 1/8" thick, finish as specified.
 - All items U.L and C.U.L. approved for dry locations.
 - Fluorescent ballast is electronic, HPF instant start, 120V.
 - All units mount to standard 4" octagonal junction box. Unless otherwise noted, no additional supports required.
 - Visit www.oxygenlighting.com for technical cut sheets.
 - Oxygen lighting reserves the right to modify designs at any time.
- * • **To avoid possible abnormal end of life, use lamps with integral End of Life protection.**

optional diffuser finishes

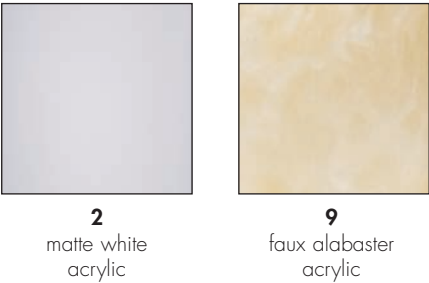

sample catalog number

series #	diffuser	finish	options	catalog number	ADA compliant	UL US
2-5130	2	24	-	2-5130-224		
halcyon sconce, 1 X 24W	matte white acrylic	satin nickel	none			