

**CONSTRUCTION**

- A** Pole - Made of an aluminium moulded part, of tapered and fluted shape, of Ø3" (76 mm) at the top and Ø7" (178 mm) at the base. The pole is welded to the decorative base.
- B** Decorative base - Made of one piece moulded 356 aluminium alloy.
- C** Access door - Made of one piece moulded aluminium and covers an opening of 4 1/2" by 10" (114 mm by 254 mm) that gives access to a copper grounding terminal. The door closes on a neoprene gasket making it waterproof.
- D** Decorative base cover - Made of one piece moulded 356 aluminium alloy and is mechanically held to the decorative base.
  - Anchor plate - Made of one piece moulded aluminium. The bolt circle of the plate is Ø15 1/2" (394 mm).
  - Anchor bolts - There are four in all, made of galvanized steel and 'L' shaped. The bolts are of size 3/4" by 15" long (19 mm by 381 mm long) and supplied with two nuts and two flats for each.

**FINISH**



- All surfaces are chemically treated against corrosion through a multi-stage immersion process. The polyester powder finish is applied by a thermostatic process offering an excellent protection conforming to ASTM G7, D-2247 and B-117/D-1654 standards. Standard colours are black, bronze and white with a textured finish. Consult SDL's "Colour Selection Guide" for others.

**HARDWARE**


- All exterior hardware is made of stainless steel.

**WARRANTY**

- This product has a three year warranty on the finish and against any manufacturing defect. The ballast and its components are covered by the manufacturer's warranty.

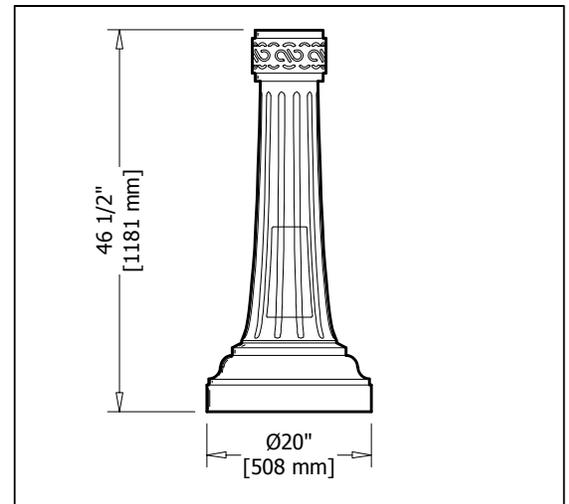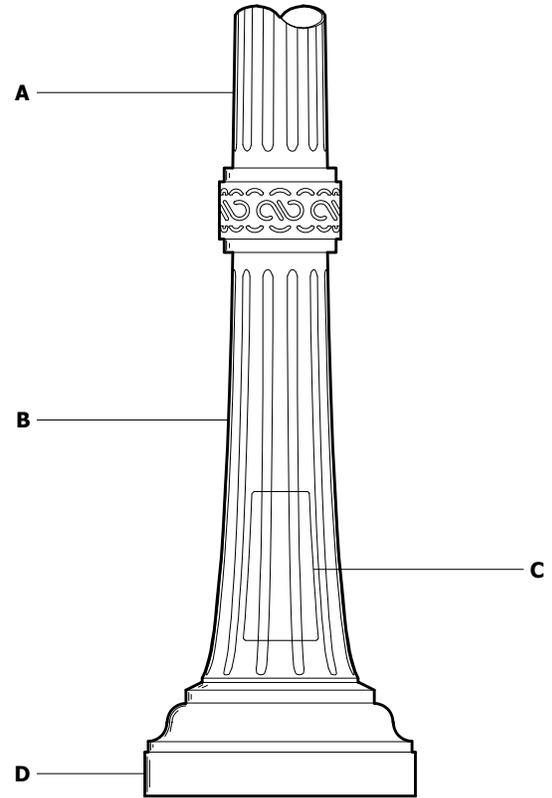

Type	Quantity	Model	Section	Height	Wall thickness	Colour	Other components
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Submitted on _____ for <input type="checkbox"/> Information <input type="checkbox"/> Approval				Project — _____			
<input type="checkbox"/> Ø3" x 3" tenon				Distributor — _____			
Other(s) — <input style="width: 100%;" type="text"/>				Your order # — _____			
				Representative — _____			
				Our order # — _____			

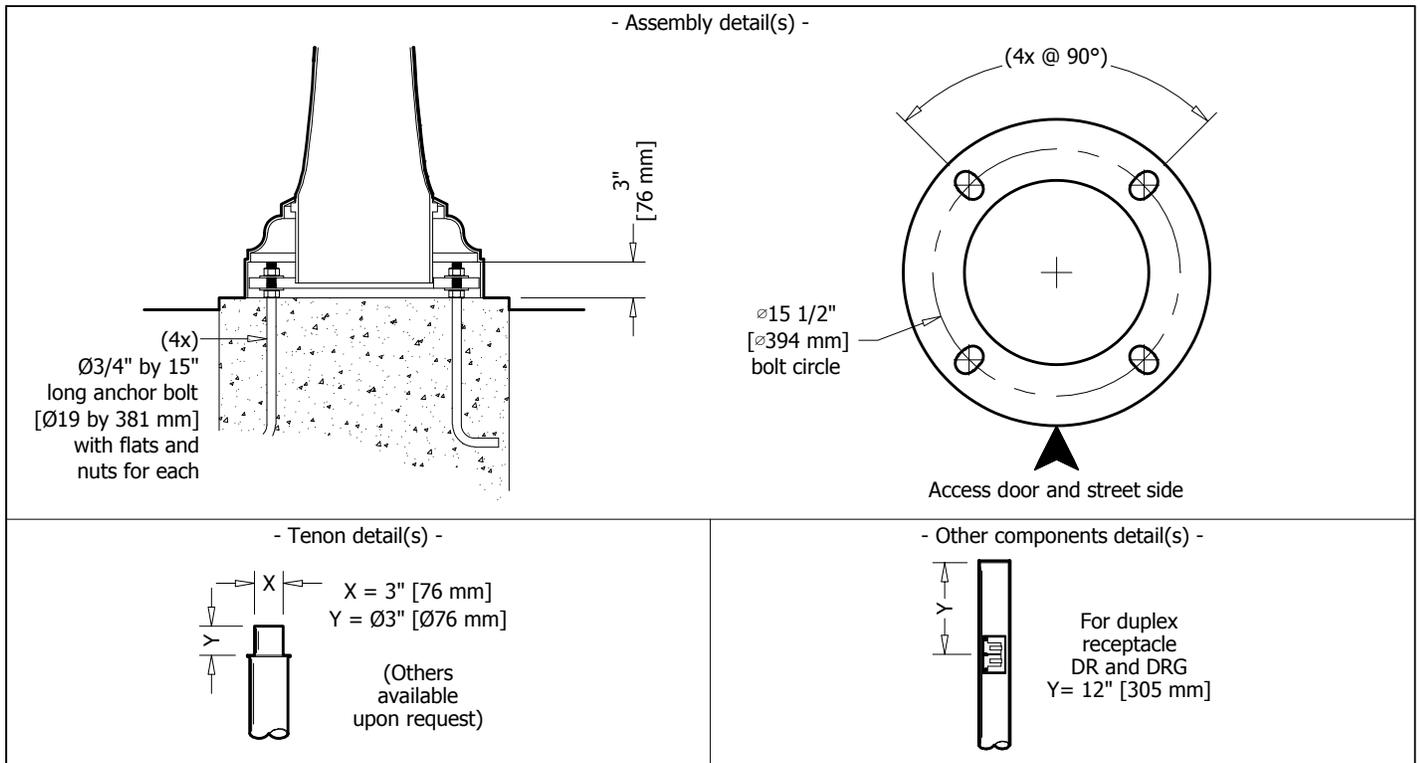

- Specification guide -

Section	Height	Wall thickness	Colour	Other components
Taper cast aluminium 	12' [3,66 m] <b>12</b>	1/4" [6 mm] <b>H</b>	<p style="text-align: center;">Standard Colours</p> Textured black — <b>A11</b> <input type="checkbox"/> Textured bronze — <b>B11</b> <input type="checkbox"/> Textured white — <b>C11</b> <input type="checkbox"/> <hr/> <p style="text-align: center;">Special Colours</p> Textured beige — <b>D11</b> <input type="checkbox"/> Silver — <b>E10</b> <input type="checkbox"/> Silver charcoal — <b>E20</b> <input type="checkbox"/> Textured grey blue — <b>G11</b> <input type="checkbox"/> Textured blue — <b>H11</b> <input type="checkbox"/> Textured dark blue — <b>H21</b> <input type="checkbox"/> Textured dark turquoise — <b>J11</b> <input type="checkbox"/> Textured turquoise — <b>J21</b> <input type="checkbox"/> Textured forest green — <b>K11</b> <input type="checkbox"/> Textured dark forest green — <b>K21</b> <input type="checkbox"/> Textured dark green — <b>K31</b> <input type="checkbox"/> Fine textured dark green — <b>K42</b> <input type="checkbox"/> Textured red — <b>M11</b> <input type="checkbox"/> Textured burgundy — <b>M21</b> <input type="checkbox"/> Fine textured patina — <b>X11</b> <input type="checkbox"/> Custom colour — <b>CC</b> ★ <input type="checkbox"/>	<p style="text-align: center;">Optional</p> Duplex receptacle — <b>DR</b> <input type="checkbox"/> Ground fault duplex receptacle — <b>DRG</b> <input type="checkbox"/>

**IMPORTANT NOTICE**

Éclairage SDL inc. disclaims any responsibility for problems that could occur from a combination of third party products with those of Éclairage SDL inc.

★ Consult manufacturer

Order example	<b>MR</b>	-	<b>7ALC</b>	-	<b>12</b>	-	<b>H</b>	-	<b>A11</b>	-	<b>DR</b>
	Model		Section		Height		Wall thickness		Colour		Other components