


PORTFOLIO™

HOUSING

7"

C7142
C7242

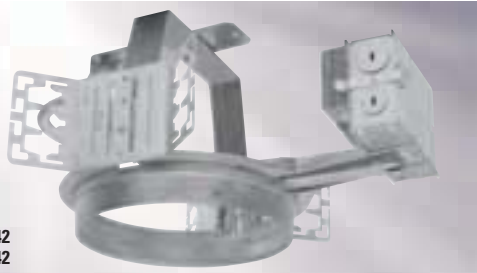

7" Horizontal Lamp

1-26/32/42 TTT
2-26/32/42 TTT

Wide beam distribution for general lighting from one or two horizontally mounted compact fluorescent lamps. Accommodates various reflector types. Adjustable socket bracket maintains proper lamp position.

Dimensions	Length	Width	Height	Cutout
Standard Housing	14"	13-5-16"	8"	8-1/8"
Emergency	17-5/8"	20"	8"	
Chicago Plenum	14"	13-5-16"	8"	

HOUSING

C7142=(1) 26W TTT Lamp
(1) 32W TTT Lamp
(1) 42W TTT Lamp
C7242=(2) 26W TTT Lamp
(2) 32W TTT Lamp
(2) 42W TTT Lamp

¹For C7242 only

BALLAST

E=120V - 277V 50/60 Hz Electronic
3E=347V 50/60 Hz Electronic
1D26=26W 120V Dimming, Lutron® Compact SE
1D32=32W 120V Dimming, Lutron® Compact SE
1D42=42W 120V Dimming, Lutron® Compact SE
2D26=26W 277V Dimming, Lutron® Compact SE
2D32=32W 277V Dimming, Lutron® Compact SE
2D42=42W 277V Dimming, Lutron® Compact SE
EDR26=DeRated Wattage Label, 26W¹
EDR32=DeRated Wattage Label, 32W¹

OPTIONS

CP=Chicago Plenum
2C=(2) Ballasts for Hi-Low Switching¹
2CMS=2 Circuit Master Satellite (2 housings, order 2 trims)¹
EM=Emergency module with remote test switch
IEM=Emergency module with integral test switch

ACCESSORIES

HB26=C Channel Bar Hanger, 26" Long, Pair
HB50=C Channel Bar Hanger, 50" Long, Pair
RMB22=Wood Joist Bar Hanger, 22" Long, Pair
HSA7=Slope Adapter for 7" Aperture Housings, Specify Slope (not recommended for wall wash)
TRM7= Metal Trim Ring, Specify Finish*
TRR7=Rimless Trim Ring, White*
FK5=Field Installed Fuse Kit, 5 Amp
DT7=DecoTrims™*
*Not compatible with Self Flange

TRIM

Open Downlight



TRIM

1 Lamp
7151=Self Flanged
7150=Molded Trim Ring, White
7151E=Self Flanged, use with IEM option
7150E=Molded Trim Ring, White, use with IEM option

2 Lamp
7351=Self Flanged
7350=Molded Trim Ring, White
7351E=Self Flanged, use with IEM option
7350E=Molded Trim Ring, White, use with IEM option


FINISH

LI=Low Iridescent Clear
H=Haze
WMH=Warm Haze
G=Gold
WH=Wheat
W=Gloss White

GP=Graphite
GPH=Graphite Haze
K=Cognac
KH=Cognac Haze
BB=Black Baffle (7150 only)
WB=White Baffle (7150/7350 only)

OPTIONS

WF=White Painted Flange (Self Flanged only)



Open Wall Wash

GRUVI



TRIM

1 Lamp
7111=Single Wall Wash, Self Flanged
7110=Single Wall Wash, Molded Trim Ring, White
7121=Double Wall Wash, Self Flanged
7120=Double Wall Wash, Molded Trim Ring, White

2 Lamp
7311=Single Wall Wash, Self Flanged
7310=Single Wall Wash, Molded Trim Ring, White
7321=Double Wall Wash, Self Flanged
7320=Double Wall Wash, Molded Trim Ring, White


FINISH

LI=Low Iridescent Clear
H=Haze
G=Gold
WH=Wheat
WMH=Warm Haze
W=Gloss White

GP=Graphite
GPH=Graphite Haze
K=Cognac
KH=Cognac Haze

OPTIONS

WF=White Painted Flange (Self Flanged only)



Cross Blade Downlight



TRIM

1 Lamp
7181=Self Flanged

2 Lamp
7381=Self Flanged


FINISH

LI=Low Iridescent Clear
W=Gloss White

LOUVER
5=Blade (LI or W Matching Blade Finish)
6=Perforated Blade (Lt Grey Blades, W Finish only)

OPTIONS

WF=White Painted Flange (Self Flanged only)

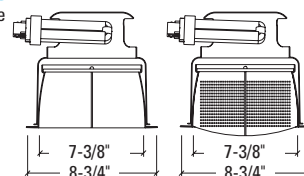

Lens Downlight



TRIM

1 Lamp
7181=Self Flanged
7180=Molded Trim Ring, White

2 Lamp
7381=Self Flanged
7380=Molded Trim Ring, White

FINISH


LI=Low Iridescent Clear
H=Haze
G=Gold
WH=Wheat
WMH=Warm Haze
W=Gloss White
GP=Graphite
GPH=Graphite Haze
K=Cognac
KH=Cognac Haze
BB=Black Baffle (7180 and 7380 only)
WB=White Baffle (7180 and 7380 only)

LENS

1=Prismatic Acrylic
2=Diffuse Acrylic
3=Clear Polycarbonate
1G=Prismatic Glass
2G=Diffuse Glass
3G=Clear Glass
4G=Fresnel Glass

OPTIONS

WF=White Painted Flange (Self Flanged only)



Ordering Example

Housing, Trim, Accessories and Lamps ordered as separate line items.

Housing	Trim	Accessories
C7142E	7150LI	HB26