



NUCRAFT

MODULAR SHELVING INSTALLATION INSTRUCTIONS (SE, EE, RE, R, AND EL SERIES)

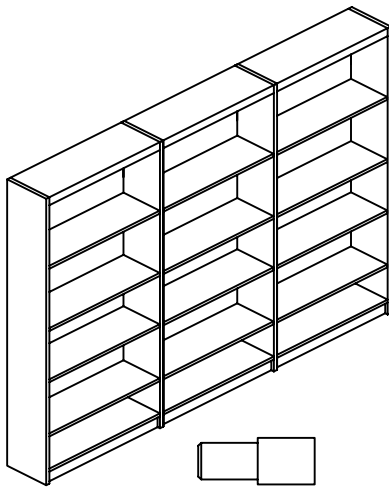

SHELF SUPPORT



PART B PART A

INSTALLATION INSTRUCTIONS

STEP 1. WORKING FROM THE FARTHEST LEFT END, ATTACH BASE CONNECTORS TO LEFT END PANEL. BACK BASE CONNECTOR HAS THE 1/4" GROOVE WHICH SHOULD LINE UP WITH THE GROOVE IN THE END PANEL. TIGHTEN RAFIX CONNECTOR 1/4 TURN CLOCKWISE. **NOTE: DO NOT FORCE OR OVER TIGHTEN.**

STEP 2. SET BACK PANEL INTO BACK BASE CONNECTOR AND LEFT END PANEL. ATTACH RIGHT END PANEL OR CENTER PANEL. ALIGN THE BACK PANEL INTO THE END PANEL AND TIGHTEN RAFIX CONNECTORS.

***NOTE-** CENTER PANELS REQUIRE THE INSTALLATION OF (8) RAFIX CENTER PANEL POSTS. HOLES HAVE BEEN PRE-BORED THROUGH CENTER PANELS AND LINE UP WITH END PANEL RAFIX PINS, WHICH HAVE ALREADY BEEN INSTALLED.

INSERT (1) CENTER POST PART A INTO CENTER POST PART B. INSTALL THIS INTO PRE-BORED HOLES, SCREW IN SECOND PART A INTO PART B, AND TIGHTEN WITH SCREWDRIVER UNTIL SHOULDERS BOTTOM OUT ON THE PANEL'S SURFACE.

STEP 3. ATTACH FIXED SHELF AT 29" HEIGHT ONTO RAFIX POSTS WHICH ARE ALREADY INSTALLED ON END PANELS ONLY.

STEP 4. ATTACH TOP SHELF BY ALIGNING UP THE BACK GROOVE WITH THE BACK PANEL. DROP ONTO POSTS AND TIGHTEN RAFIX CONNECTORS.

STEP 5. LEVEL UNIT BY ADJUSTING GLIDES WITH WRENCH. UNIT SHOULD BE MOVED INTO DESIRED LOCATION BEFORE IT IS LEVELED.

STEP 6. PULL UNIT OUT AND INSERT #8 x 3/4" PAN-HEAD SCREW INTO FIXED SHELF. (OPTIONAL)

STEP 7. LAY BOTTOM SHELF ON BASE CONNECTORS WITH WOOD CLEAT TOWARD THE FRONT OF THE CASE.

STEP 8. INSERT SHELF-SUPPORT PINS PROVIDED INTO DESIRED LOCATION, AND PUT SHELVES INTO PLACE.

NOTE: REPEAT STEPS 1-8 FOR EACH ADDITIONAL BAY.

LOOSE HARDWARE

- CENTER POST PART A
- CENTER POST PART B
- SHELF SUPPORTS

* LOOSE HARDWARE CAN BE FOUND IN BAG, STAPLED TO BACK OF BASE CONNECTOR


TOOLS NEEDED

- #2 PHILLIPS SCREWDRIVER
- 5/8" OPEN END WRENCH
- LEVEL

FOR INSTALLATION PROBLEMS OR QUESTIONS CALL NUCRAFT CUSTOMER SERVICE AT 1-800-453-0100

PRE-INSTALLED HARDWARE

- 5mm MALE RAFIX SCREWS
- RAFIX CONNECTORS
- ADJUSTABLE GLIDES

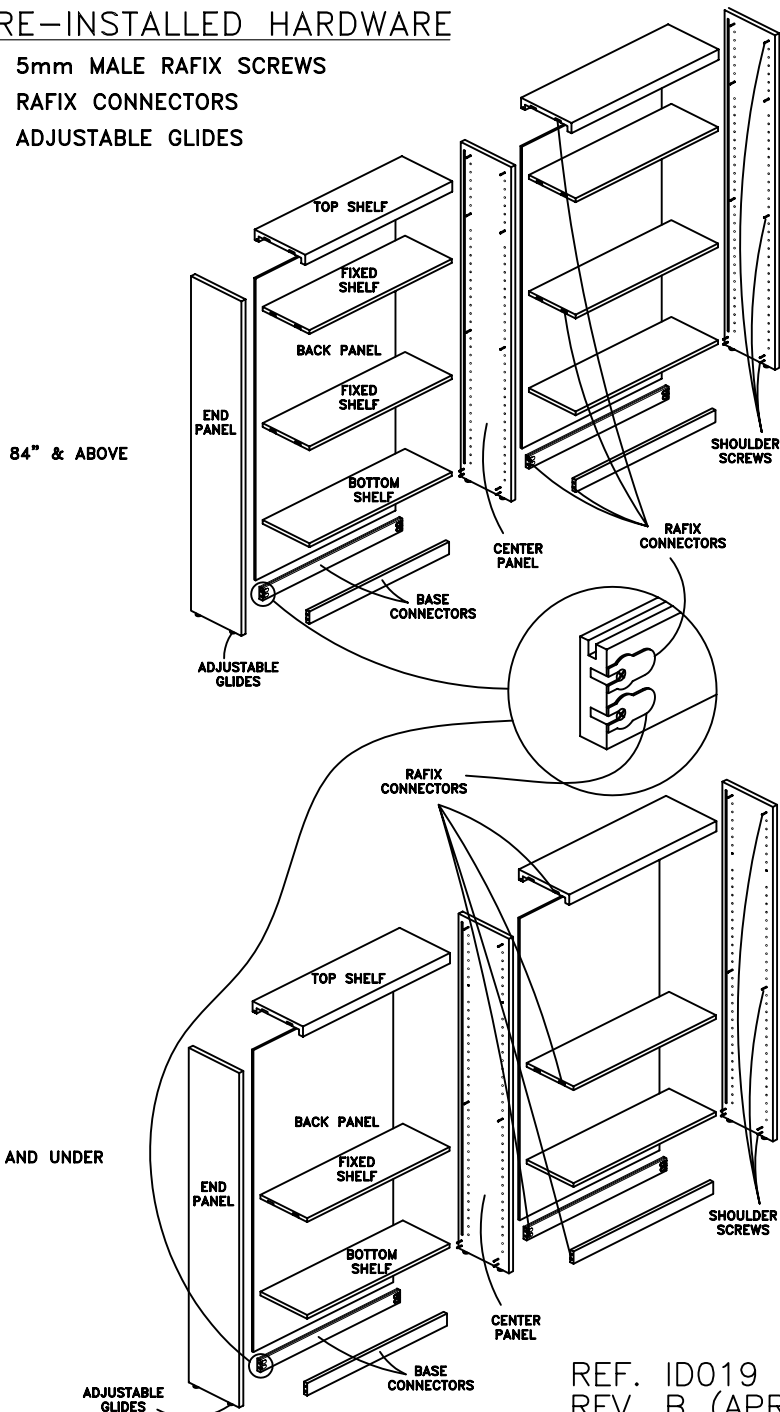

84" & ABOVE

72" AND UNDER

REF. ID019
REV. B (APRIL '06)