




DL24Z-2 - Square Wet

RECESSED ADJUSTABLE DOWNLIGHT

PRODUCT SPECIFICATION



Cat. No.	Finish
DL24Z-2SW	Matte White
DL24Z-2SB	Matte Black
DL24Z-2SS	Brushed Stainless Steel

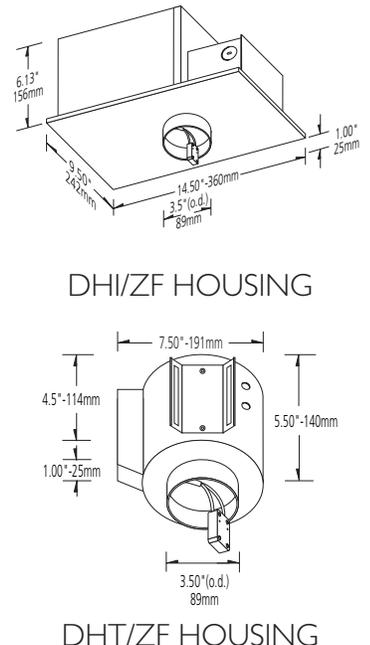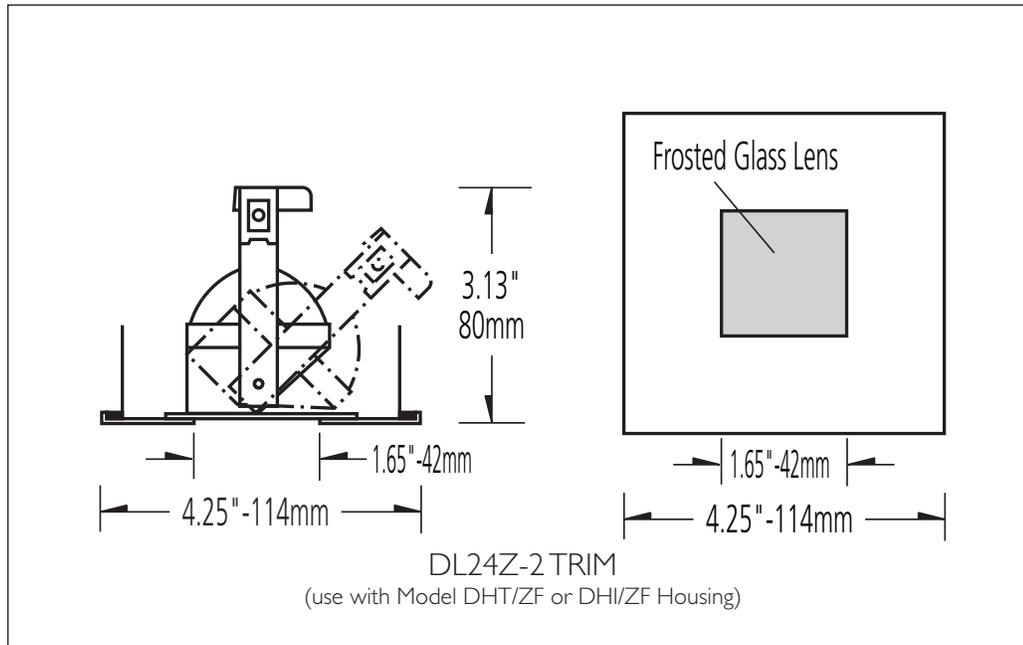

GENERAL DESCRIPTION

Lucifer recessed downlight is a low voltage fixture with **stainless steel trim face** and lampholder, for use in wet locations. Sealed square aperture is adjustable from above at 45° from vertical and can be locked in position with set screw provided. Silicone foam gasket and frosted glass lens are integral to fixture. Uses a quartz halogen lamp.

MOUNTING

Use DL24Z with **DHT/ZF** housing with integral electronic transformer (50w maximum) for non-IC, accessible and non-accessible ceilings which do not exceed 1 inch thickness. Housing butterfly brackets can be adjusted by loosening thumb-turn posts within housing to align housing neck with finish ceiling line. Use with **DHI/ZF** housing with integral electronic transformer (50w maximum) for insulated, air-tight, accessible or non-accessible ceilings which do not exceed 1 inch thickness. Hanging bars are included.

MATERIAL

Trim is constructed of stainless steel. Painted finishes are granulated powder coat. Fixture housings are riveted aluminum or welded steel.

LABEL

U.L. Listed trim for wet locations; housings listed for dry or damp locations. File No. EI 15025.

TRANSFORMER

DHT/ZF and DHI/ZF housings are powered by a 120v primary, 12v secondary, integral electronic transformer, (50w maximum), which is dimmable.

LAMP

12v MR-16 halogen lamp, 50w maximum (order separately). Specify lamp beam spread. Consult factory regarding availability of new MR-16 IR energy savings lamp series with 37w rated lamp equivalent to 50w output and 50w rated lamp at or near 65w output.

ENERGY CONSERVATION

Manufacturer recommends use of Osram Sylvania's energy saving 37w Tru-Aim® IR halogen lamps which convert more energy into light than conventional 50w MR-16 lamps. Tru-Aim® IR halogen lamps can be ordered from Lucifer Lighting for use in fixture. See luciferlighting.com for lamp specification guide.

WARRANTY

Manufacturer's one year warranty of product is conditioned on use of manufacturer supplied transformers.

LUCIFER
LIGHTING COMPANY

414 Live Oak Street
San Antonio, Texas 78202
Phone 210 227-7329
FAX 210 227-4967
www.luciferlighting.com

©2004 Lucifer Lighting Company

As part of its policy of continuous research and product development, the Company reserves the right to change or withdraw specifications without prior notice.

1016-1004