

WARNING:
BE CERTAIN ALL POWER IS OFF.
WIRE ACCORDING TO LOCAL
AND NATIONAL CODES. THIS
PRODUCT SHOULD BE INSTALLED
BY A QUALIFIED ELECTRICIAN

3-WAY AIRCRAFT CABLE MOUNTING 3 WAY MOUNTING KIT CENTER CABLE AND CORD



NOTE: 3 WAY CABLE MOUNTING USES 2 PART INSTALLATION

BEGIN INSTALLATION USING 3-WAY CABLE MOUNTING KIT.

1. USING CHART, CUT 3 CABLES (A) TO LENGTH SPECIFIED.
IF CABLES HAVE NOT BEEN INSTALLED IN 3 WAY FITTING DO THAT NOW.


2. INSTALL CUT END OF EACH CABLE IN FITTING (PRE-INSTALLED). CABLE LENGTH IS ADJUSTED AFTER INSTALLATION TO ENSURE FIXTURE HANGS PARALLEL TO FLOOR.

FIXTURE SIZE	CUT CABLE LENGTH "A"
15"	Do Not Cut
13"	Cut to 8"
12"	Cut to 8"
10"	Cut to 6"
8"	Cut to 6"

ALTERNATE STRUCTURE MOUNTING

- LOOP CABLE OVER STRUCTURE OR CHANNEL AS SHOWN
- MAKE CONNECTIO OF LOOK USING KL100 FITTING
- INSTALL FREE END OF MOUNTING CABLE INTO FITTING AT 3-WAY CABLE ASSEMBLY. ADJUST LENGTH
- FINALLY ADJUST 3 CABLES SO FIXTURE IS HANGING PARALLEL TO FLOOR

3-WAY AIRCRAFT CABLE KIT

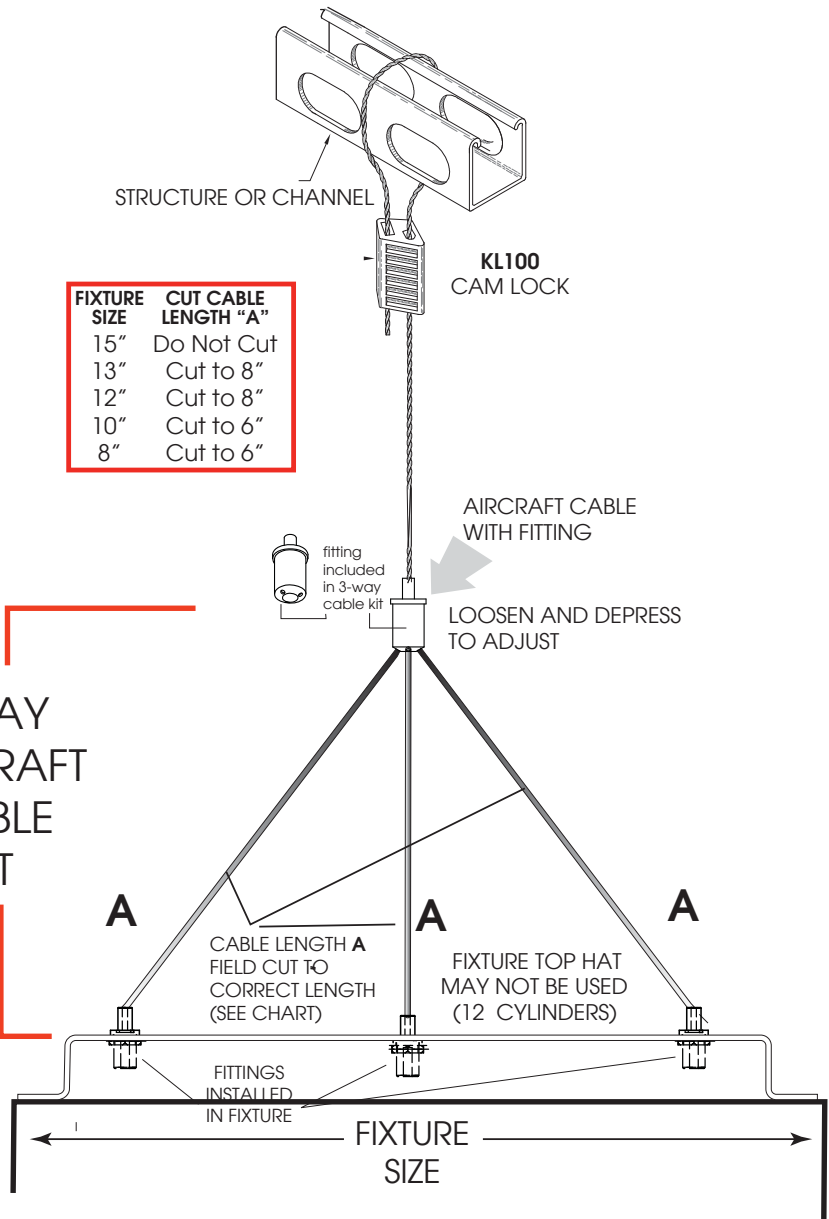

Dimensions shown are nominal. Spectrum Lighting is continually improving products and reserves the right to make changes that will not alter performance or appearance with or without written notice.



PROJECT:	TYPE:
MODEL NO.:	

