

## Tools Required

- #33 (.113 dia.) Drill (Jobbers length)
- Electric drill
- Phillips head screwdriver
- Plastic mallet

The **TechOrganizer** can be installed on Linx Worksurfaces or appropriate industrial work benches.

Linx Worksurfaces with full depth uprights are recommended to provide a Workstation/Organizer with greatest stability.


## Important Safety Instructions

- \* The Organizer must be properly secured to the Work-surface prior to installing of components.
- \* Frame load capacity is 300 lbs. (Linx Worksurfaces) and 400 lbs. (Workbenches).
- \* Do not install shelves that are greater than 18" deep.
- \* Do not install shelves more than 35" above the Work-surface.

1. Position the TechOrganizer in the desired location on the back of the Worksurface. On a Linx Worksurface, locate the back of the frame .20" from the back edge of the Worksurface. See **Figure 1**.
2. Using the holes in the frame bottom crossbar and the holes in the feet as a template, locate and drill the appropriate quantity of .113 dia. holes .50" deep in the Worksurface. See **Figure 1**.

**NOTE:** If the feet are not 90° to the frame, tap the ends with a plastic mallet to correct.

3. Attach the frame bottom crossbar to the worksurface using the #10AB x 2.25" Phillips head flat head screws (provided). See **Figure 1**.
4. Attach the feet to the Worksurface using the four #10AB x .75 Phillips pan head screws (provided). See **Figure 1**.

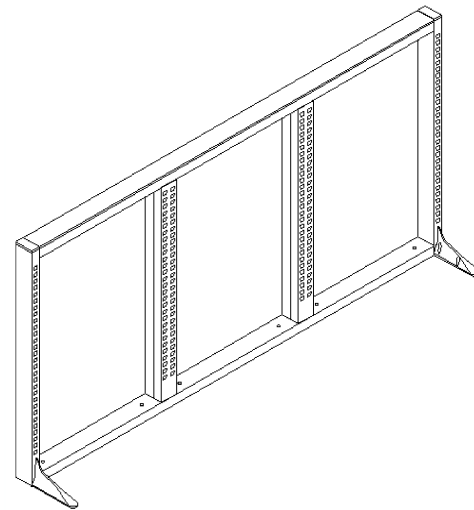

TechOrganizer

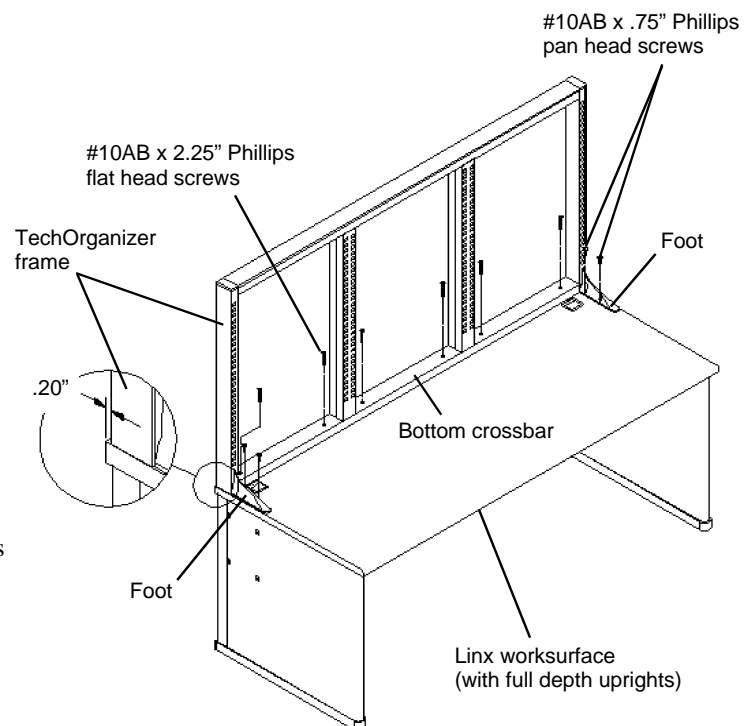


Figure 1

technical furniture

# Tech Organizer Service Parts List

## Parts List

Part Number	Description	Qty.
1	6074X Organizer Frame, 16" x 24"	1
	6075X Organizer Frame, 32" x 24"	
	6076X Organizer Frame, 36" x 24"	
	6077X Organizer Frame, 48" x 24"	
	6078X Organizer Frame, 16" x 30"	
	6079X Organizer Frame, 32" x 30"	
	6080X Organizer Frame, 36" x 30"	
	6081X Organizer Frame, 48" x 30"	
	6082X Organizer Frame, 16" x 36"	
	6083X Organizer Frame, 32" x 36"	
	6084X Organizer Frame, 36" x 36"	
	6085X Organizer Frame, 48" x 36"	
	6086X Organizer Frame, 16" x 42"	
	6087X Organizer Frame, 32" x 42"	
	6088X Organizer Frame, 36" x 42"	
	6089X Organizer Frame, 48" x 42"	
	5441X Organizer Frame, 16" x 48"	
	5442X Organizer Frame, 32" x 48"	
	5443X Organizer Frame, 36" x 48"	
	6090X Organizer Frame, 48" x 48"	
	5444X Organizer Frame, 16" x 60"	
	5445X Organizer Frame, 32" x 60"	
	5446X Organizer Frame, 36" x 60"	
	6091X Organizer Frame, 48" x 60"	
	5450X Organizer Frame, 16" x 72"	
	5451X Organizer Frame, 32" x 72"	
	5452X Organizer Frame, 36" x 72"	
	6109X Organizer Frame, 48" x 72"	

## Parts List

Part Number	Description	Qty.
1	5447X Organizer Frame, 16" x 72"	1
	5448X Organizer Frame, 32" x 72"	
	5449X Organizer Frame, 36" x 72"	
	6092X Organizer Frame, 48" x 72"	
2	6094X Cover, 24"	1
	6095X Cover, 30"	
	6096X Cover, 36"	
	6097X Cover, 42"	
	5437X Cover, 48"	
	5438X Cover, 60"	
	5439X Cover, 72"	
	6375X Cover, 24"	
	6376X Cover, 30"	
	6377X Cover, 36"	
	6378X Cover, 42"	
	6379X Cover, 48"	
	6380X Cover, 60"	
	6381X Cover, 72"	
3	5431X Cap	2
4	5434X Cover - End Standard, 16"	2
	5435X Cover - End Standard, 32"	
	5436X Cover - End Standard, 36"	
	6093X Cover - End Standard, 48"	
5	84742 #10AB x 2.25" Phillips Flat Head Screw	varies

technical furniture

# Tech Organizer Service Parts List ( c o n t . )

Parts List			
Part Number		Description	Qty.
6	6251X	CWS Organizer Frame, 16" x 24"- R.H.	1
	6253X	CWS Organizer Frame, 32" x 24"- R.H.	
	6255X	CWS Organizer Frame, 36" x 24"- R.H.	
	6257X	CWS Organizer Frame, 48" x 24"- R.H.	
	6259X	CWS Organizer Frame, 16" x 30"-R.H.	
	6261X	CWS Organizer Frame, 32" x 30"- R.H.	
	6263X	CWS Organizer Frame, 36" x 30"- R.H.	
	6265X	CWS Organizer Frame, 48" x 30"- R.H.	
	6267X	CWS Organizer Frame, 16" x 36"- R.H.	
	6269X	CWS Organizer Frame, 32" x 36"- R.H.	
	6271X	CWS Organizer Frame, 36" x 36"- R.H.	
	6273X	CWS Organizer Frame, 48" x 36"- R.H.	
	6275X	CWS Organizer Frame, 16" x 42"- R.H.	
	6277X	CWS Organizer Frame, 32" x 42"- R.H.	
	6279X	CWS Organizer Frame, 36" x 42"- R.H.	
	6281X	CWS Organizer Frame, 48" x 42"- R.H.	
	6383X	CWS Organizer Frame, 16" x 48"- R.H.	
	6285X	CWS Organizer Frame, 32" x 48"- R.H.	
	6287X	CWS Organizer Frame, 36" x 48"- R.H.	
	6289X	CWS Organizer Frame, 48" x 48"- R.H.	
	6291X	CWS Organizer Frame, 16" x 60"- R.H.	
	6293X	CWS Organizer Frame, 32" x 60"- R.H.	
	6295X	CWS Organizer Frame, 36" x 60"- R.H.	
	6297X	CWS Organizer Frame, 48" x 60"- R.H.	
	6299X	CWS Organizer Frame, 16" x 72"- R.H.	
	6301X	CWS Organizer Frame, 32" x 72"- R.H.	
	6303X	CWS Organizer Frame, 36" x 72"- R.H.	
	6305X	CWS Organizer Frame, 48" x 72"- R.H.	

technical furniture

# Tech Organizer

## Service Parts List

( c o n t . )



Parts List			
Part Number		Description	Qty.
7	6250X	CWS Organizer Frame, 16" x 24"- L.H.	1
	6252X	CWS Organizer Frame, 32" x 24"- L.H.	
	6254X	CWS Organizer Frame, 36" x 24"- L.H.	
	6256X	CWS Organizer Frame, 48" x 24"- L.H.	
	6258X	CWS Organizer Frame, 16" x 30"- L.H.	
	6260X	CWS Organizer Frame, 32" x 30"- L.H.	
	6262X	CWS Organizer Frame, 36" x 30"- L.H.	
	6264X	CWS Organizer Frame, 48" x 30"- L.H.	
	6266X	CWS Organizer Frame, 16" x 36"- L.H.	
	6268X	CWS Organizer Frame, 32" x 36"- L.H.	
	6270X	CWS Organizer Frame, 36" x 36"- L.H.	
	6272X	CWS Organizer Frame, 48" x 36"- L.H.	
	6274X	CWS Organizer Frame, 16" x 42"- L.H.	
	6276X	CWS Organizer Frame, 32" x 42"- L.H.	
	6278X	CWS Organizer Frame, 36" x 42"- L.H.	
	6280X	CWS Organizer Frame, 48" x 42"- L.H.	
	6382X	CWS Organizer Frame, 16" x 48"- L.H.	
	6284X	CWS Organizer Frame, 32" x 48"- L.H.	
	6286X	CWS Organizer Frame, 36" x 48"- L.H.	
	6288X	CWS Organizer Frame, 48" x 48"- L.H.	
	6290X	CWS Organizer Frame, 16" x 60"- L.H.	
	6292X	CWS Organizer Frame, 32" x 60"- L.H.	
	6294X	CWS Organizer Frame, 36" x 60"- L.H.	
	6296X	CWS Organizer Frame, 48" x 60"- L.H.	
	6298X	CWS Organizer Frame, 16" x 72"- L.H.	
	6300X	CWS Organizer Frame, 32" x 72"- L.H.	
	6302X	CWS Organizer Frame, 36" x 72"- L.H.	
	6304X	CWS Organizer Frame, 48" x 72"- L.H.	

# TechOrganizer

## Service Parts List

( c o n t . )


Parts List			
Part Number		Description	Qty.
8	6229X	Corner Post, 16"	1
	6230X	Corner Post, 32"	
	6231X	Corner Post, 36"	
	6232X	Corner Post, 48"	
9	6233X	Cap	1
10	83508	1/4"-20 x 1-5/8" Button Head Cap Screw	

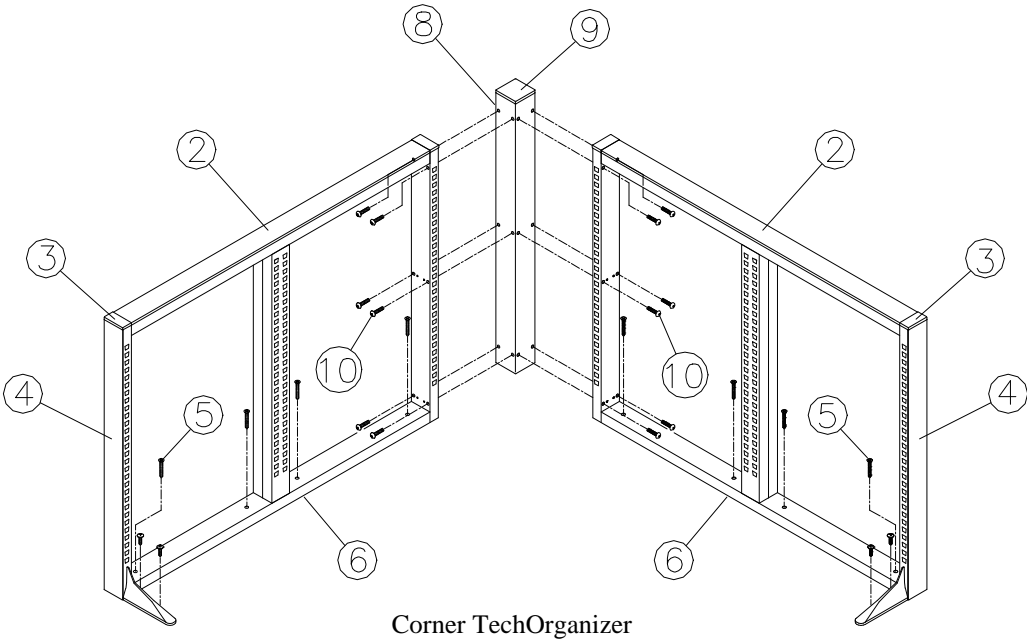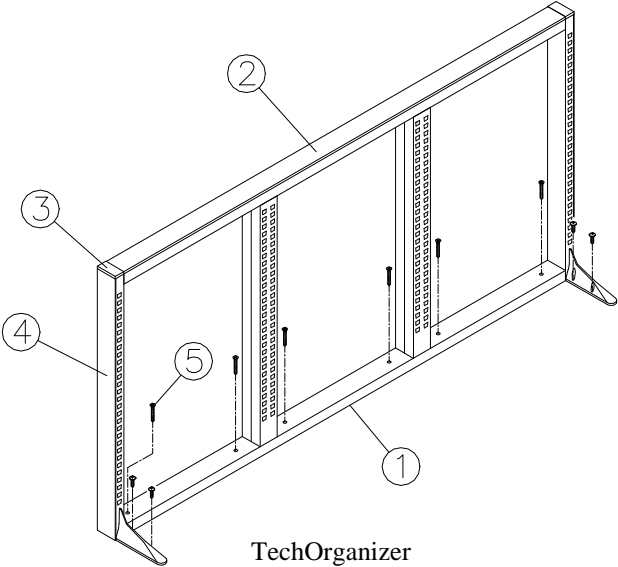

# Corner Tech Organizer

## Tools Required

- #33 (.113 dia.) Drill (Jobbers length)
- Electric drill
- 5/32" Allen wrench (provided)
- Phillips head screwdriver
- Plastic mallet

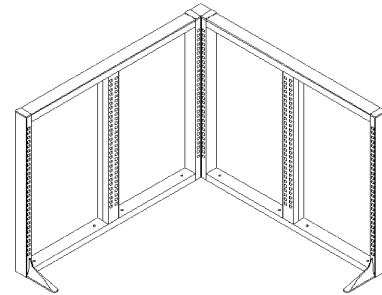

Corner Tech Organizer

The **Corner Tech Organizer** can be installed on Linx Worksurfaces or appropriate industrial work benches.

LINX Worksurfaces with full depth uprights are recommended to provide a Workstation/Organizer with greatest stability.

## Important Safety Instructions

- \* The Organizer must be properly secured to the Work-surface prior to installing of components.
- \* Frame load capacity is 300 lbs. (Linx worksurfaces)  
400 lbs. (Workbenches).
- \* Do not install shelves that are greater than 18" deep.
- \* Do not install shelves more than 35" above the Work-surface.

1. Assemble Left hand and Right hand **Organizer frames** to the **Corner post** with the 1/4"-20 x 1-5/8" Button head cap screws provided. See **Figure 1**.

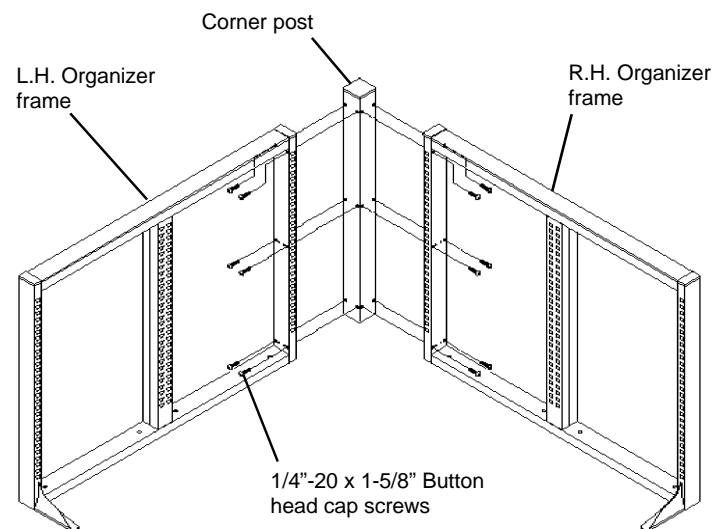


Figure 1

# Corner Tech Organizer ( c o n t . )

2. With two people, position the TechOrganizer in the desired location on the back of the Worksurface. On a Linx Worksurface, locate the back of the frame .20" from the back edge of the Worksurface. See **Figure 2**.

3. Using the holes in the frame bottom crossbar and the holes in the feet as a template, locate and drill the appropriate quantity of .113 dia. holes .50" deep in the Worksurface. See **Figure 2**.

**NOTE:** If the feet are not 90° to the frame, tap the ends with a plastic mallet to correct.

4. Attach the frame bottom crossbar to the worksurface using the #10AB x 2.25" Phillips head flat head screws (provided). See **Figure 2**.

5. Attach the feet to the Worksurface using the four #10AB x .75" Phillips pan head screws (provided). See **Figure 2**.

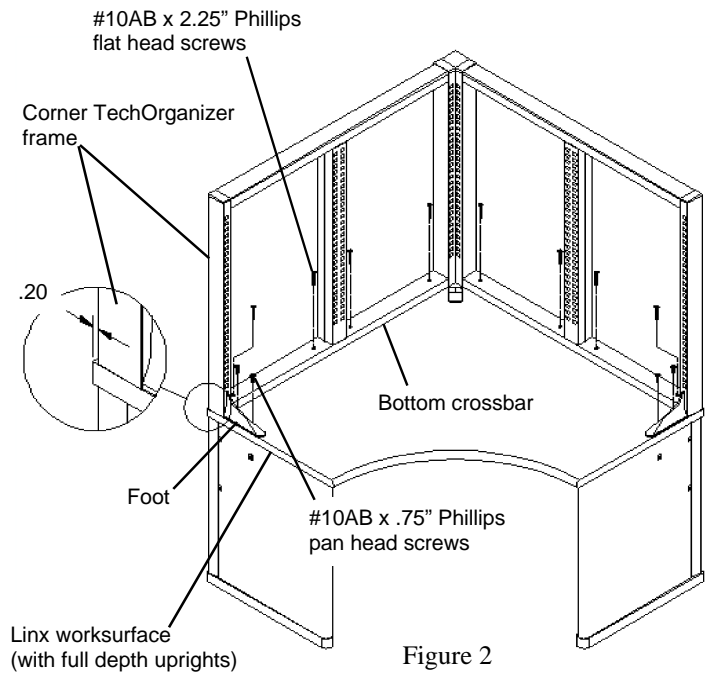



Figure 2

## Tools Required

- Phillips head screwdriver
- Flat blade screwdriver
- Plastic mallet

**NOTE: White Boards, Peg Boards and Bin Boards** are provided in various widths and heights depending on the size of your TechOrganizer.

The 19" Boards can be installed in multiple vertical locations on the TechOrganizer frame.

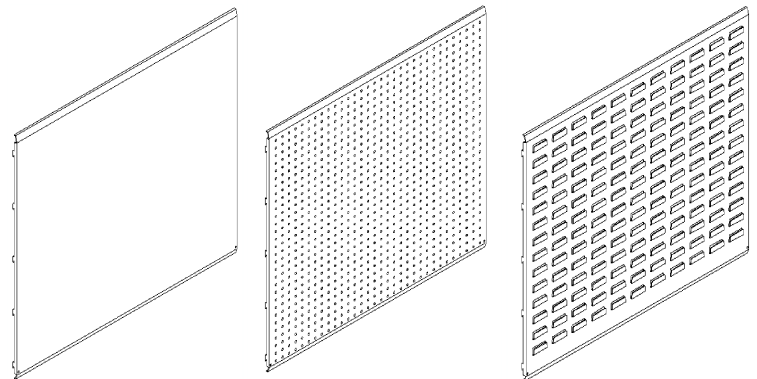

White Board

Peg Board

Bin Board

## **IMPORTANT**

The Boards must be installed prior to any component which may extend across a portion of the board.

The TechOrganizer frame must be properly attached to the Worksurface prior to panel installation.

1. Attach the steel **Mounting Channels** to the sides of the Organizer frame slotted standards by aligning the holes in the Channels with the pre-punched holes in the standards and securing them with the #8-32 x 3/8" Phillips pan head thread forming screws provided. See **Figure 1**. **NOTE:** Be sure that the embossed triangle at the end of each Channel is at the top.

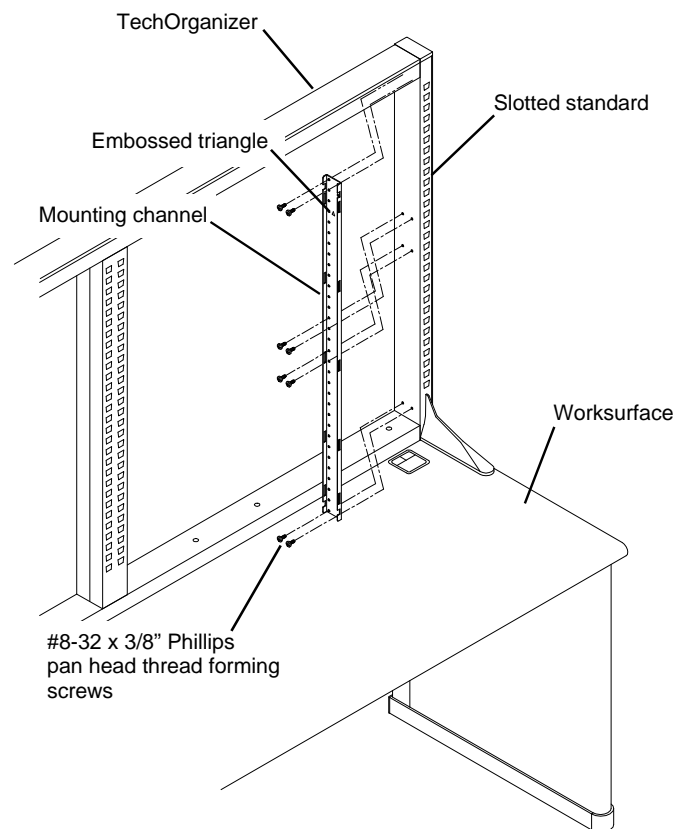


Figure 1



# White, Peg And Bin Boards ( c o n t . )

2. Attach the Board panel to the Mounting Channels by inserting the panel hooks into the rectangular slots in the Mounting Channels. See **Figure 2**.

Ensure that the Board panel is fully seated onto the Mounting Channels. Use a flat blade screwdriver as a lever or a plastic mallet as required.

3. Lock the Board in place by installing two #10-24 x 3/4" Phillips pan head thread forming screws into the bottom of the panel. See **Figure 2**.


## **IMPORTANT**

The panel must be fully seated prior to installation of the screws.

**NOTE:** Use only *Dry Erase* markers on the **White Board** surface that erase with a dry cloth or eraser.

It may be necessary to use a cleaner to periodically clean the board and to fully erase certain markers.

Optional **Marker Trays** are available. Reference the Wright Line Spec. Guide.

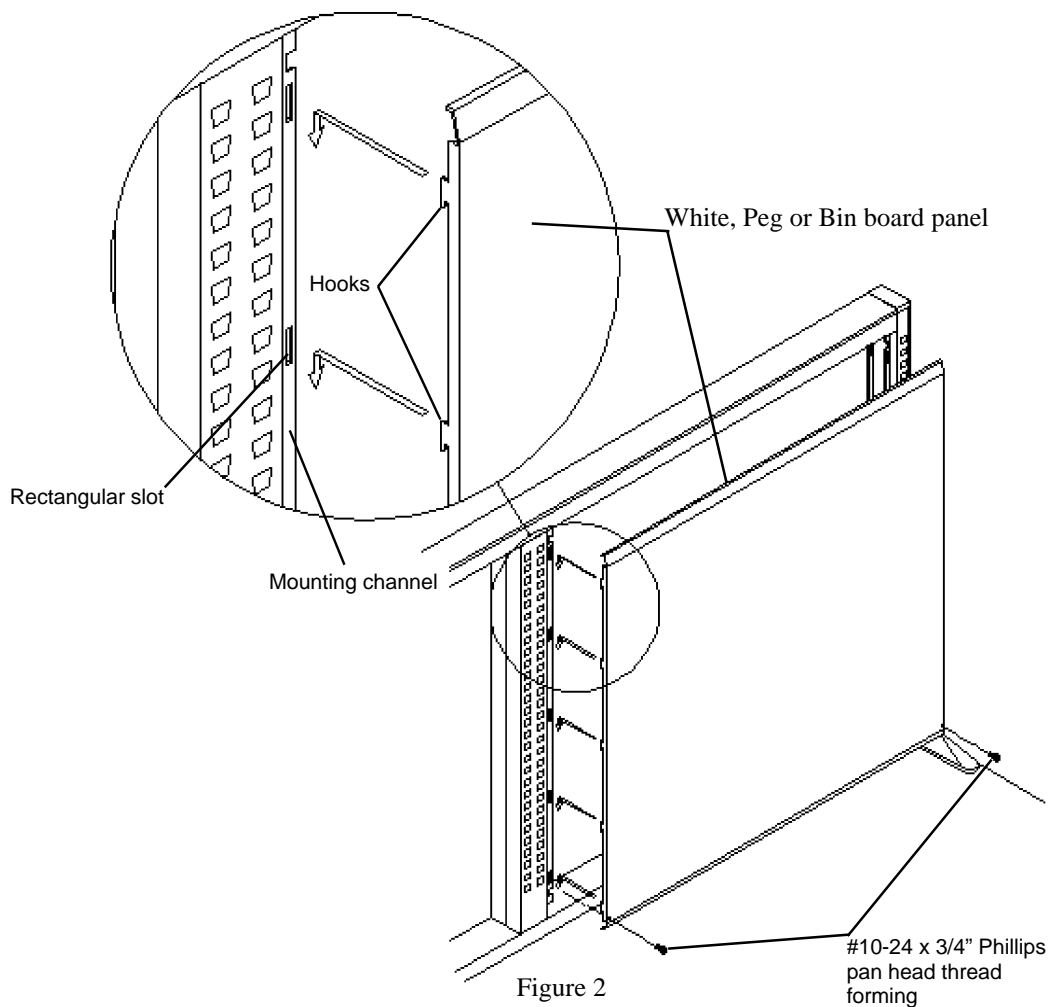

technical furniture

# White, Peg And Bin Boards ( c o n t . )

## Parts List

Part Number	Description	Qty.
1	85100 White Board - 11.64" High x 20.92" Wide	1
	85101 White Board - 11.64" High x 26.92" Wide	
	85102 White Board - 11.64" High x 32.92" Wide	
	84902 White Board - 18.64" High x 20.92" Wide	
	84903 White Board - 18.64" High x 26.92" Wide	
	84904 White Board - 18.64" High x 32.92" Wide	
	84902 White Board - 19.10" High x 20.92" Wide	
	84903 White Board - 19.10" High x 26.92" Wide	
	84904 White Board - 19.10" High x 32.92" Wide	
	84905 White Board - 27.64" High x 20.92" Wide	
	84906 White Board - 27.64" High x 26.92" Wide	
	84907 White Board - 27.64" High x 32.92" Wide	
	84908 White Board - 31.64" High x 20.92" Wide	
	84909 White Board - 31.64" High x 26.92" Wide	
	84910 White Board - 31.64" High x 32.92" Wide	
	84925 White Board - 43.64" High x 20.92" Wide	
	84926 White Board - 43.64" High x 26.92" Wide	
	84927 White Board - 43.64" High x 32.92" Wide	
2	6774X Peg Board - 11.64" High x 20.92" Wide	1
	6775X Peg Board - 11.64" High x 26.92" Wide	
	6776X Peg Board - 11.64" High x 32.92" Wide	
	6189X Peg Board - 18.64" High x 20.92" Wide	
	6190X Peg Board - 18.64" High x 26.92" Wide	
	6191X Peg Board - 18.64" High x 32.92" Wide	
	6192X Peg Board - 27.64" High x 20.92" Wide	
	6193X Peg Board - 27.64" High x 26.92" Wide	
	6194X Peg Board - 27.64" High x 32.92" Wide	
	6195X Peg Board - 31.64" High x 20.92" Wide	
	6196X Peg Board - 31.64" High x 26.92" Wide	


technical furniture

# White, Peg And Bin Boards ( c o n t . )

Parts List			
Part Number		Description	Qty.
<b>2</b>	6197X	Peg Board - 31.64" High x 32.92" Wide	1
	6198X	Peg Board - 43.64" High x 20.92" Wide	
	6199X	Peg Board - 43.64" High x 26.92" Wide	
	6200X	Peg Board - 43.64" High x 32.92" Wide	
	6782X	Bin Board - 11.64" High x 20.92" Wide	
	6783X	Bin Board - 11.64" High x 26.92" Wide	
	6784X	Bin Board - 11.64" High x 32.92" Wide	
	6201X	Bin Board - 18.64" High x 20.92" Wide	
	6202X	Bin Board - 18.64" High x 26.92" Wide	
	6203X	Bin Board - 18.64" High x 32.92" Wide	
<b>3</b>	6204X	Bin Board - 27.64" High x 20.92" Wide	1
	6205X	Bin Board - 27.64" High x 26.92" Wide	
	6206X	Bin Board - 27.64" High x 32.92" Wide	
	6207X	Bin Board - 31.64" High x 20.92" Wide	
	6208X	Bin Board - 31.64" High x 26.92" Wide	
	6209X	Bin Board - 31.64" High x 32.92" Wide	
	6210X	Bin Board - 43.64" High x 20.92" Wide	
	6211X	Bin Board - 43.64" High x 26.92" Wide	
	6212X	Bin Board - 43.64" High x 32.92" Wide	
<b>4</b>	6127X	18.5" Mounting Channel	2
	6128X	27.5" Mounting Channel	
	6129X	31.5" Mounting Channel	
	6130X	43.5" Mounting Channel	
<b>5</b>	83645	#8-32 x 3/8" Phillips Pan Head Thread Forming Screws	varies
<b>6</b>	80023	#10-24 x 3/4" Phillips Pan Head Thread Forming Screws	


technical furniture

# White, Peg And Bin Boards ( c o n t . )

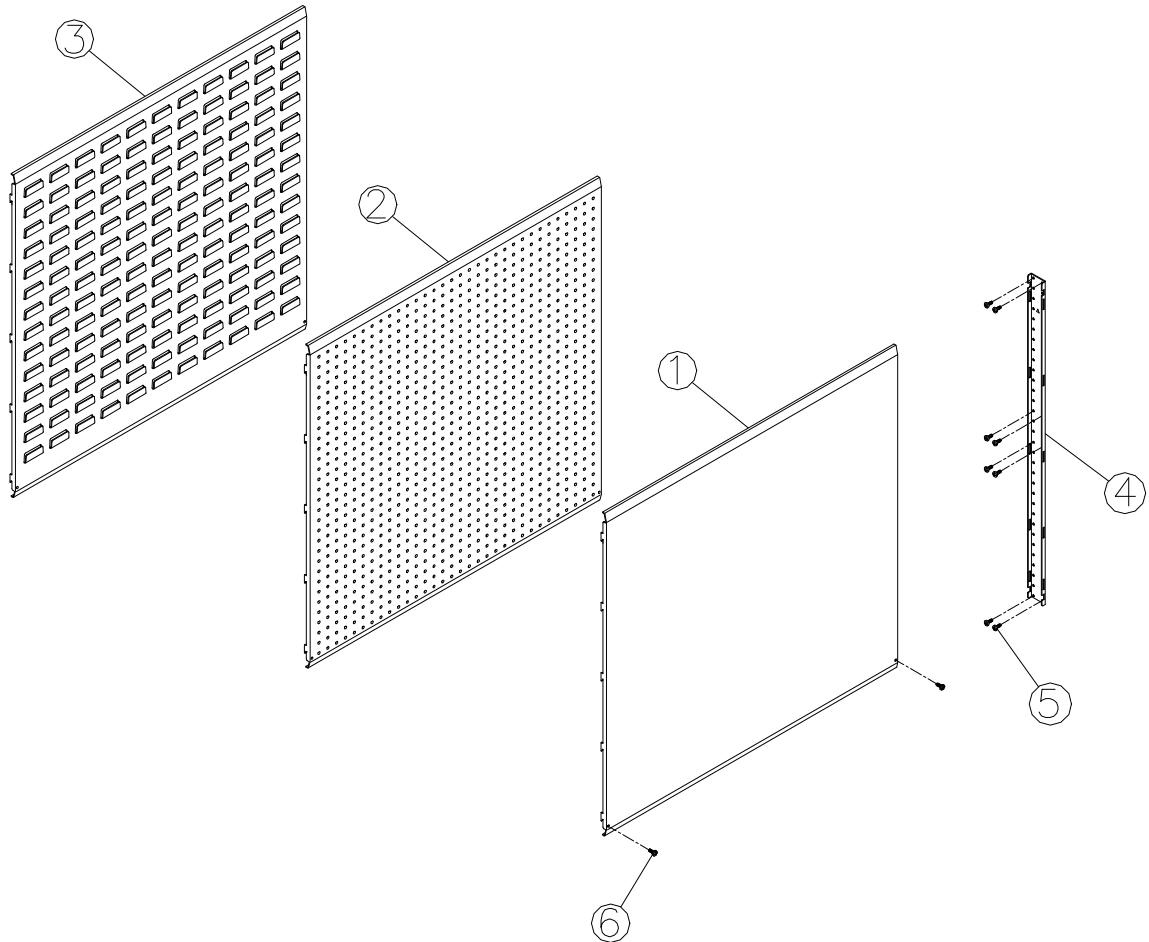

## Tools Required


-None

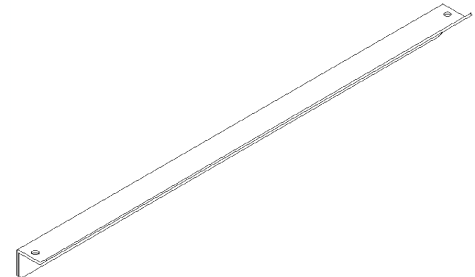


Marker Tray

1. Remove the release liner from the double faced tape on the back of the **Marker Tray**.
2. Carefully align the bottom of the Tray with the bend line at the bottom of the White Board and center it side to side.

Now press the Marker Tray firmly in place. For maximum adhesion, do not use the Tray for 24 hours.

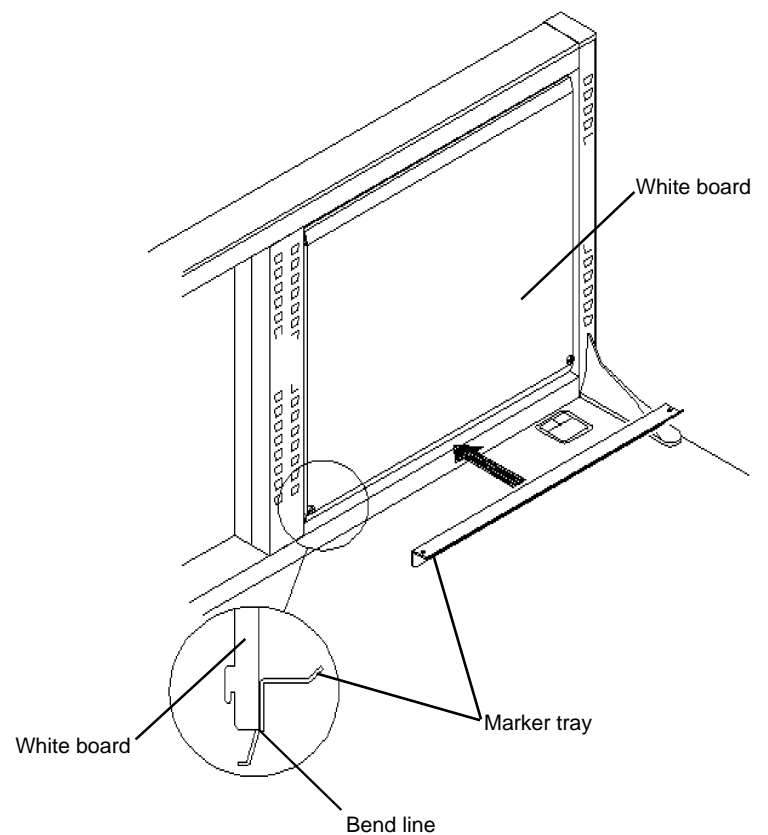

Parts List			
Part Number		Description	Qty.
1	6596X	Marker Tray - 24"	1
	6597X	Marker Tray - 30"	
	6598X	Marker Tray - 36"	

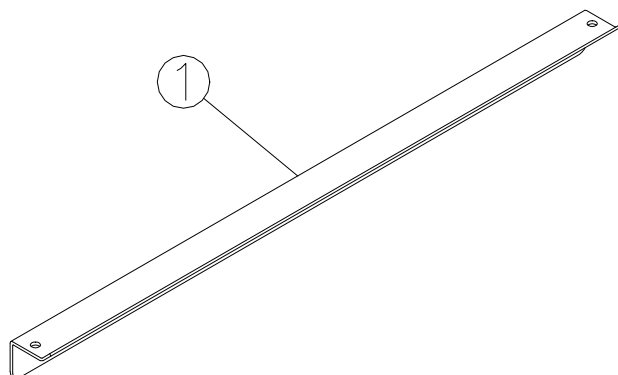

## Tools Required

- Phillips head screwdriver
- Flat file


**NOTE:** Panels are provided in various widths and heights depending on the size of your unit.

## IMPORTANT

For ease of installation, it is recommended that the **Fabric Tech Walls** be installed onto the **TechOrganizer** frame prior to the installation of other components. i.e. Locking Compartments, Shelves, etc.

The TechOrganizer frame must be properly attached to the Worksurface prior to panel installation.

1. Attach the steel **Mounting Channels** to the sides of the Organizer frame slotted standards by aligning the holes in the Channels with the pre-punched holes in the standards and securing them with the #8-32 x 3/8" Phillips pan head thread forming screws provided. **NOTE:** Be sure that the embossed triangle at the end of each Channel is at the top.

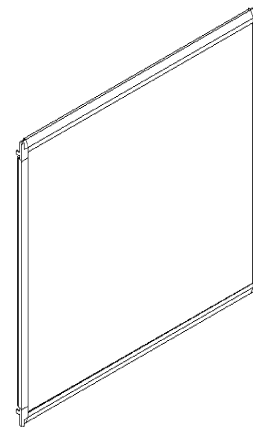

Fabric Tech Wall

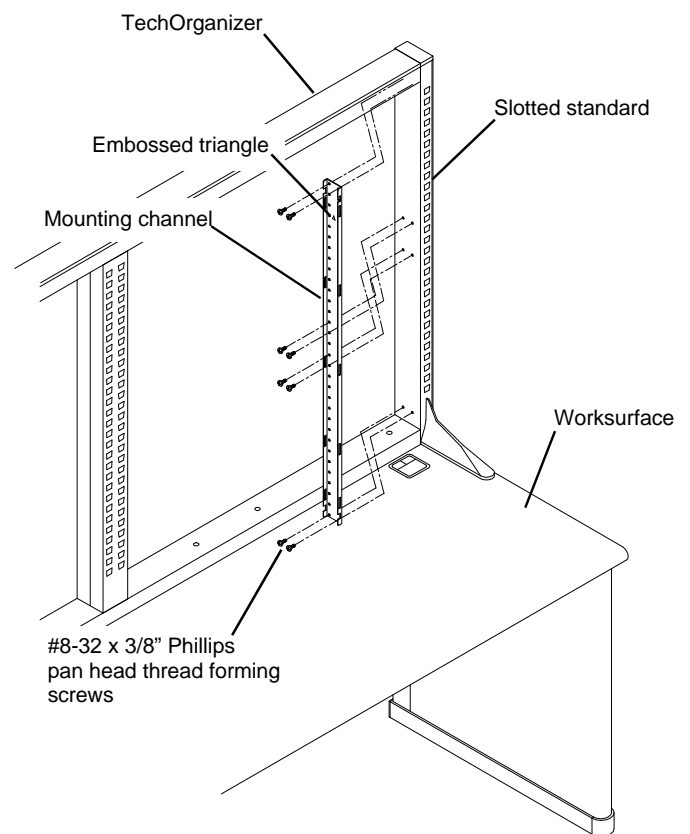


Figure 1

**Important:** For proper Tech Wall installation, the Mounting Channels must attach flat against the slotted standards. If a weld joining the two halves of the double standard exceeds a height of approximately .03"(.8mm), it may be necessary to carefully file the weld. See **Figure 2**.

2. Install the panels onto the TechOrganizer frame by first inserting one side of the Tech Wall onto one Mounting Channel and then snapping the other side onto the opposite Mounting Channel. See **Figure 3**.

To facilitate positioning the Tech Wall within the frame, align the locator tab on each corner of the Tech Wall with the appropriate notch in the Mounting Channel. See **Figure 4**.

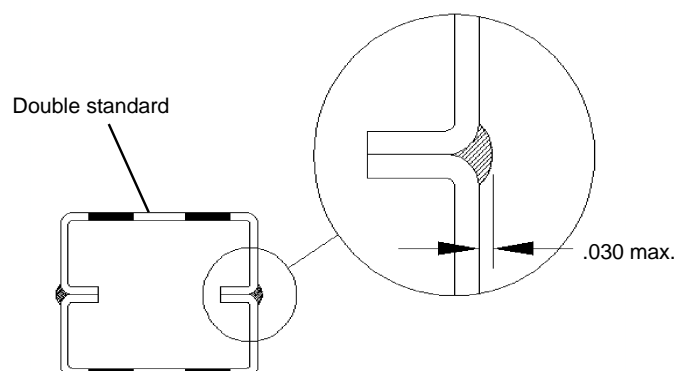


Figure 2

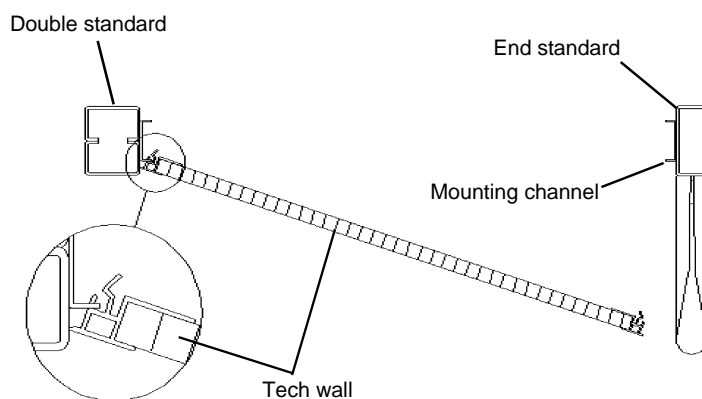


Figure 3

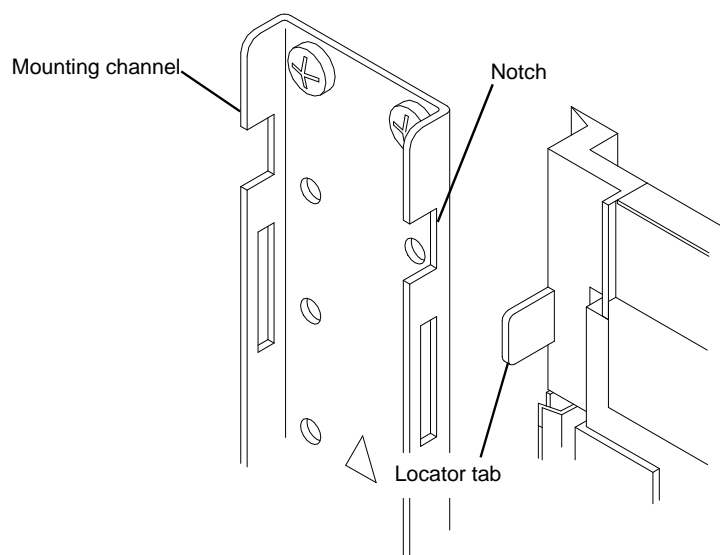


Figure 4



## Tech Wall Installation with Components Pre-installed on One Side of the Frame

Tech Walls may be installed onto the Organizer frames that have other components on one side.

1. Attach a single steel Mounting Channel to the left or right side of each frame section. See **Figure 1**.
2. Install the Tech Wall onto the single Mounting Channel. See **Figure 2**.

3. With the Tech Wall in place, insert the second Mounting Channel into the vertical panel retainer. See **Figure 3a**. Align the frame tabs with the notches in the channel.

Rotate the Mounting Channel, align the holes in the channel with the holes in the frame standard, and fasten the channel in place using the #8-32 x 3/8" screws. See **Figure 3b**.

4. Install the second set of Tech Walls onto the side of the frame without components following the instructions on previous page.

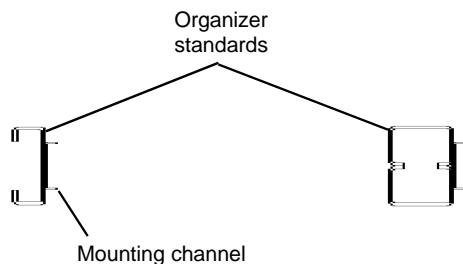


Figure 1


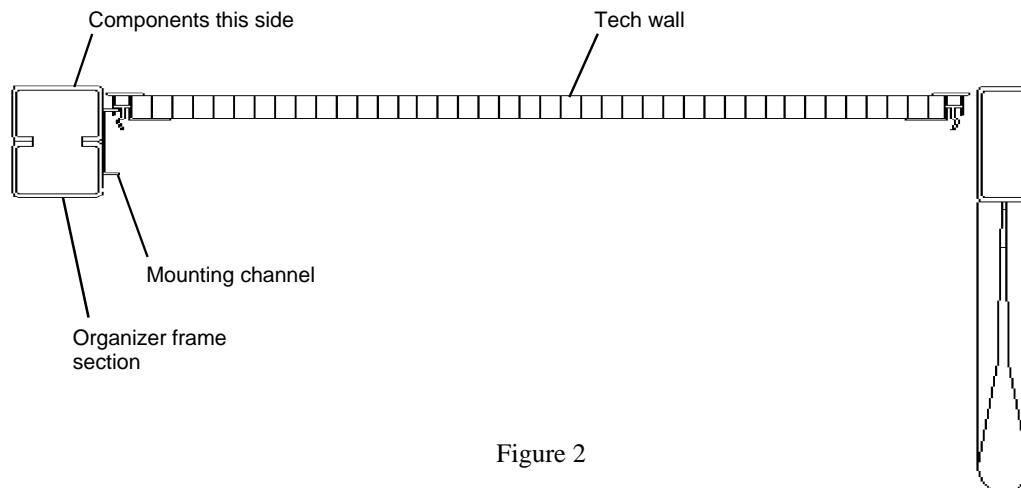


Figure 2

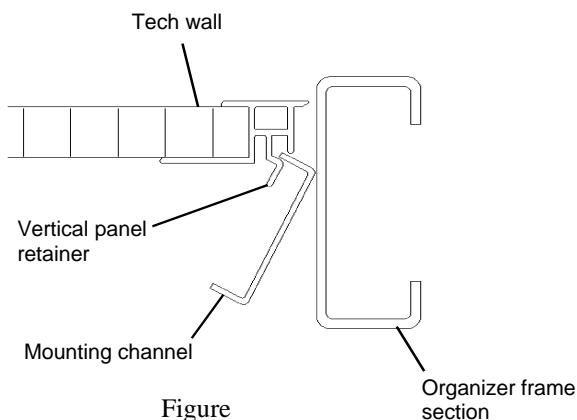

Figure

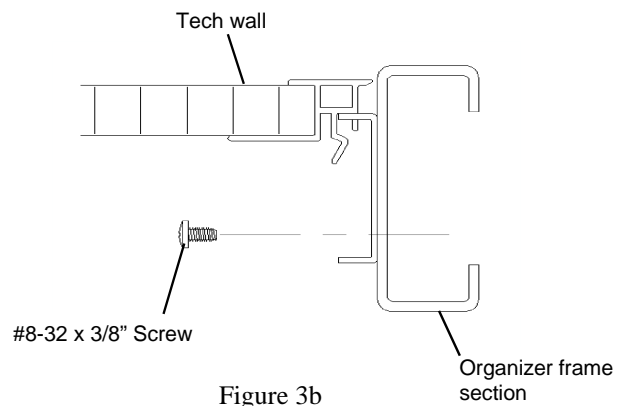


Figure 3b

### Parts List


Part Number		Description	Qty.
<b>1</b>	6213X	12.52" x 21.21" Fabric Panel	varies
	6214X	12.52" x 27.21" Fabric Panel	
	6215X	12.52" x 33.21" Fabric Panel	
	6685X	12.52" x 39.21" Fabric Panel	
	6216X	28.52" x 21.21" Fabric Panel	
	6217X	28.52" x 27.21" Fabric Panel	
	6218X	28.52" x 33.21" Fabric Panel	
	6686X	28.52" x 39.21" Fabric Panel	
	6219X	32.52" x 21.21" Fabric Panel	
	6220X	32.52" x 27.21" Fabric Panel	
	6221X	32.52" x 33.21" Fabric Panel	
	6687X	32.52" x 39.21" Fabric Panel	
	6222X	44.52" x 21.21" Fabric Panel	
	6223X	44.52" x 27.21" Fabric Panel	
	6224X	44.52" x 33.21" Fabric Panel	
	6688X	44.52" x 39.21" Fabric Panel	
	6338X	12.52" x 18.17" Fabric Panel	
	6339X	28.52" x 18.17" Fabric Panel	
	6340X	32.52" x 18.17" Fabric Panel	
	6341X	44.52" x 18.17" Fabric Panel	
	6342X	12.52" x 24.17" Fabric Panel	
	6343X	28.52" x 18.17" Fabric Panel	
	6344X	32.52" x 18.17" Fabric Panel	
	6345X	44.52" x 24.17" Fabric Panel	
	6346X	12.52" x 30.17" Fabric Panel	
	6347X	28.52" x 30.17" Fabric Panel	
	6348X	32.52" x 30.17" Fabric Panel	
	6349X	44.52" x 30.17" Fabric Panel	

### Parts List

Part Number		Description	Qty.
	6350X	12.52" x 36.17" Fabric Panel	
	6351X	28.52" x 36.17" Fabric Panel	
	6352X	32.52" x 36.17" Fabric Panel	
	6353X	44.52" x 36.17" Fabric Panel	
	6354X	12.52" x 19.70" Fabric Panel	
	6355X	28.52" x 19.70" Fabric Panel	
<b>1</b>	6356X	32.52" x 19.70" Fabric Panel	varies
	6357X	44.52" x 19.70" Fabric Panel	
	6358X	12.52" x 25.70" Fabric Panel	
	6359X	28.52" x 25.70" Fabric Panel	
	6360X	32.52" x 25.70" Fabric Panel	
	6361X	44.52" x 25.70" Fabric Panel	
	6362X	12.52" x 31.70" Fabric Panel	
	6363X	28.52" x 31.70" Fabric Panel	
	6364X	32.52" x 31.70" Fabric Panel	
	6365X	44.52" x 31.70" Fabric Panel	
<b>2</b>	6132X	11.5" Mounting Channel	2
	6128X	27.5" Mounting Channel	
	6129X	31.5" Mounting Channel	
	6130X	43.5" Mounting Channel	
<b>3</b>	83645	#8-32 x 3/8" Phillips Pan Head Thread Forming Screw	varies


technical furniture

# Fabric Tech Wall ( c o n t . )

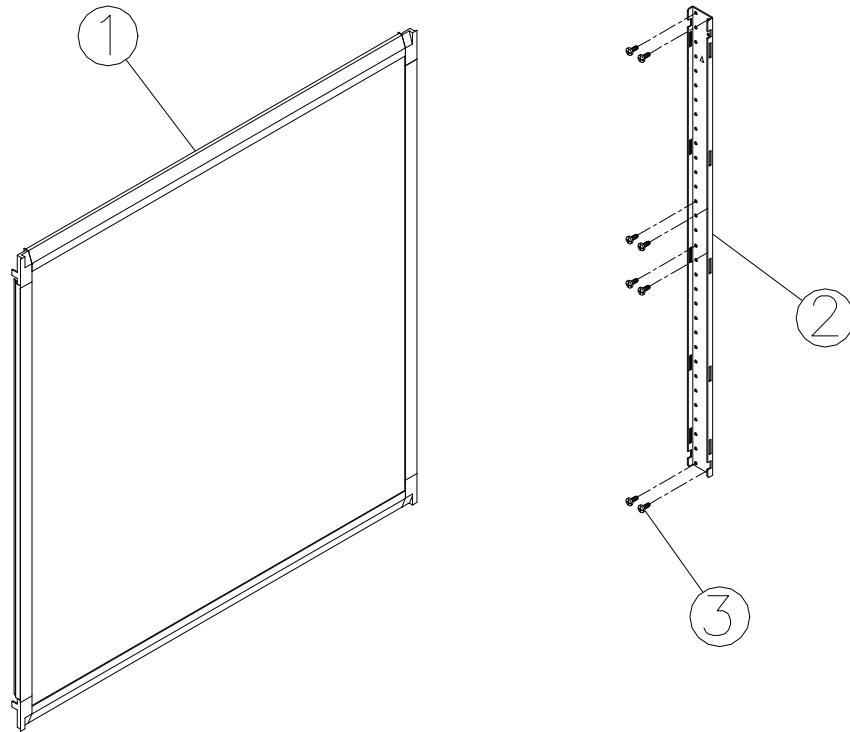

## Tools Required

- Plastic mallet
- Phillips head screwdriver

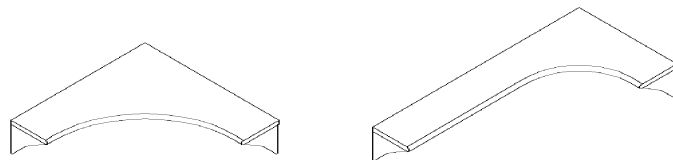

Corner Laminate Hook-on Shelves

1. Determine the location of the **Corner Laminate Hook-**

**On Shelf.** Position the **Shelf Supports** as shown in **Figure 1**. Insert the hooks on the back of the supports into the Slotted Standards and push down. To ensure that the hooks are seated, tap the top rear of the Shelf Supports with a plastic mallet or equivalent.

**NOTE:** The Shelf Supports are **right hand** and **left hand**. Be sure to install them as shown.

2. Install the **Rear Supports**. Be sure to locate them at the same height as the Shelf Supports. See **Figure 1**.
3. With two people, lift and place the shelf onto the Shelf Supports.
4. Fasten the shelf to the R.H. and L.H. supports with the four #10AB x 5/8" Phillips head screws provided. See **Figure 2**.

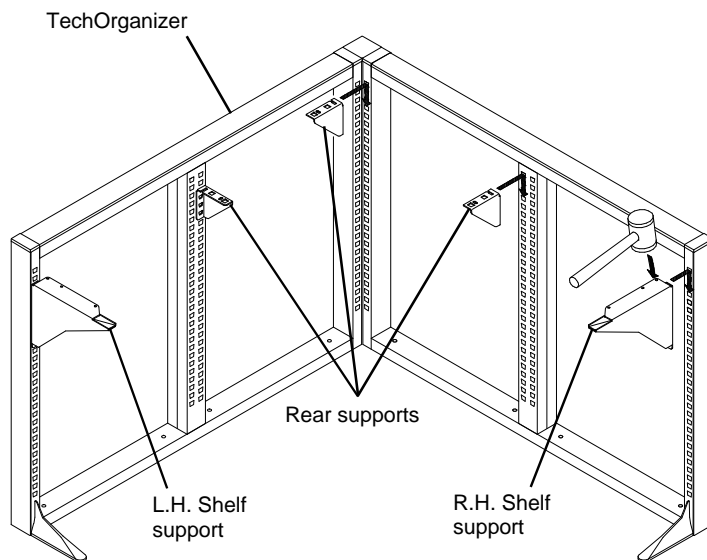


Figure 1

## MAXIMUM SHELF LOADING

The maximum shelf loading is 300lbs.(136kg.) regardless of size.

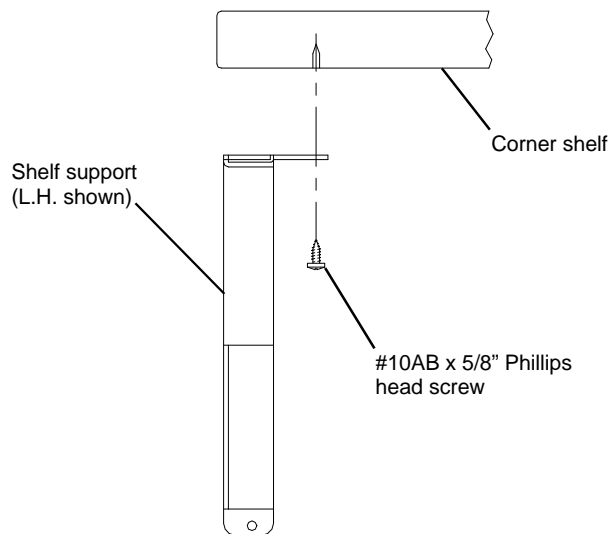


Figure 2

# Corner Laminate Hook-On Shelves ( c o n t . )

## Parts List

Part Number		Description	Qty.
<b>1</b>	6239X	Corner Shelf 24" x 24"- 12" Deep	
	6240X	Corner Shelf 30" x 30"- 12" Deep	
	6341X	Corner Shelf 36" x 36"- 12" Deep	
	6242X	Corner Shelf 42" x 42"- 12" Deep	
	6243X	Corner Shelf 48" x 48"- 12" Deep	
	6244X	Corner Shelf 48" x 60"- 12" Deep, L.H.	
	6245X	Corner Shelf 48" x 60"- 12" Deep, R.H.	
	6246X	Corner Shelf 48" x 72"- 12" Deep, L.H.	
	6247X	Corner Shelf 48" x 72"- 12" Deep, R.H.	
	6248X	Corner Shelf 36" x 72"- 12" Deep, L.H.	
	6249X	Corner Shelf 36" x 72"- 12" Deep, R.H.	
	7449X	Corner Shelf 24" x 24"- 18" Deep	
	7450X	Corner Shelf 30" x 30"- 18" Deep	
	7451X	Corner Shelf 36" x 36"- 18" Deep	
	7452X	Corner Shelf 42" x 42"- 18" Deep	
	7453X	Corner Shelf 48" x 48"- 18" Deep	
	7454X	Corner Shelf 48" x 60"- 18" Deep, L.H.	
	7455X	Corner Shelf 48" x 60"- 18" Deep, R.H.	
	7456X	Corner Shelf 48" x 72"- 18" Deep, L.H.	
	7457X	Corner Shelf 48" x 72"- 18" Deep, R.H.	
	7458X	Corner Shelf 36" x 72"- 18" Deep, L.H.	
	7459X	Corner Shelf 36" x 72"- 18" Deep, R.H.	
<b>2</b>	8156X	8" x 11" Shelf Support, L.H.	1
	8157X	8" x 11" Shelf Support, R.H.	
	8154X	8" x 17" Shelf Support, L.H.	
	8155X	8" x 17" Shelf Support, R.H.	
<b>3</b>	3125X	Rear Support	3
<b>4</b>	82287	#10AB x 5/8" Phillips Head Screw	4

# Corner Laminate Hook-On Shelves ( c o n t . )

