

ANDROMEDA

DESIGN ERNESTO GISMONDI

Artemide®
ARCHITECTURAL

ANDROMEDA



Andromeda Recessed Ceiling

- series of rectangular and square shaped recessed ceiling mounting luminaires providing directional low-voltage halogen, and direct and diffused fluorescent lighting
- body structure in stamped steel with white powder coated finish
- diffuser in white polycarbonate
- low voltage spot trims in die-cast aluminum with black finish, can be directed individually: tilt angle ranging from -10° to + 70°, with rotation of up to 355°
- provides T5 fluorescent diffused downlight and either MR16 or AR111 directional spotlights (dual circuit recommended)
- available in 5 sizes: 12" x 12", 12" x 24", 12" x 36", 12" x 48", mounting directly into rigid sheet rock or plaster ceilings and 12" x 24", 12" x 48", and 24" x 24" size designed for acoustic inverted exposed "T" grid ceilings (NEMA Type G, max "T" width is 1")
- all models have incorporated low voltage 120V/12V electronic transformer (277V/12V optional) and standard thermally protected, class P, high power factor 120V electronic fluorescent ballast (277V optional) with separate switch circuits for the independent control of the diffused and accent lighting functions


Andromeda Ceiling

- series of rectangular and square shaped ceiling mounted luminaires providing directional low-voltage halogen, and direct and diffused fluorescent lighting
- body structure in extruded aluminum with silver grey powder coated finish
- diffuser in white polycarbonate
- low voltage spot trims in die-cast aluminum with black finish, can be directed individually: tilt angle ranging from -10° to + 70°, with rotation of up to 355°
- provides T5 fluorescent diffused downlight and either MR16

- or AR111 directional spotlights (dual circuit recommended)
- available in 5 sizes: 12" x 12", 12" x 24", 12" x 36", 12" x 48", and 24" x 24", mounts directly to rigid ceiling surface over standard electrical junction boxes
- all models have incorporated low voltage 120V/12V electronic transformer (277V/12V optional) and standard thermally protected, class P, high power factor 120V electronic fluorescent ballast (277V optional) with separate switch circuits for the independent control of the diffused and accent lighting functions

Andromeda Suspension

- series of rectangular and square shaped suspension mounted luminaires providing directional low-voltage halogen, and indirect and/or indirect and direct diffused fluorescent lighting
- body structure in extruded aluminum with silver grey powder coated finish
- diffuser in white polycarbonate
- low voltage spot trims in die-cast aluminum with black finish, can be directed individually: tilt angle ranging from -10° to + 70°, with rotation of up to 355°
- provides T5 fluorescent indirect and direct diffused or only direct diffused lighting, both options with either MR16 or AR111 directional spotlights (dual circuit recommended)
- available in 5 sizes: 12" x 12" (direct emission model only), 12" x 24", 12" x 36", 12" x 48", and 24" x 24"
- supplied with grey thermoplastic canopy with electrical feed and stainless steel cable mounting to standard electrical junction boxes, and 3 stainless steel support cables which mount to rigid ceiling surface (hardware not supplied)

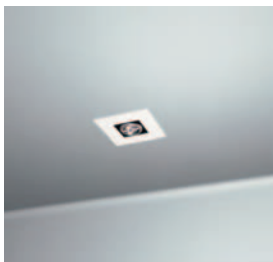

RECESSED
12" X 12"




RECESSED
12" X 24"



RECESSED
12" X 36"



RECESSED
12" X 48"



RECESSED
24" X 24"



CEILING
12" X 12"



CEILING
12" X 24"



CEILING
12" X 36"



CEILING
12" X 48"



CEILING
24" X 24"



SUSPENSION
DIRECT EMISSION
12" X 12"




SUSPENSION
DIRECT EMISSION
12" X 24"



SUSPENSION
DIRECT EMISSION
12" X 36"




SUSPENSION
DIRECT EMISSION
12" X 48"

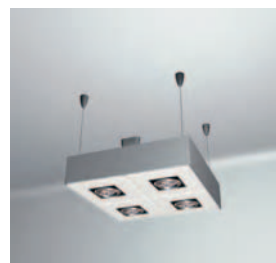

SUSPENSION
DIRECT EMISSION
24" X 24"




SUSPENSION
DIRECT / INDIRECT EMISSION
12" X 24"

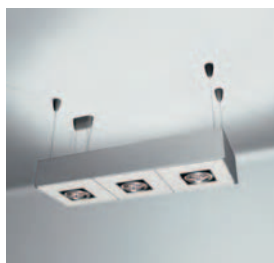

SUSPENSION
DIRECT / INDIRECT EMISSION
12" X 36"



SUSPENSION
DIRECT / INDIRECT EMISSION
12" X 48"

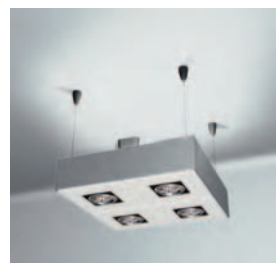

SUSPENSION
DIRECT / INDIRECT EMISSION
24" X 24"

ANDROMEDA RECESSED INSTALLATION

Step 1: install housing into ceiling

Step 2: install finish frame

Step 3: recess luminaire into ceiling and attach to housing

1. body
2. screws for attaching the luminaire to housing
3. housing
4. drywall ceiling
5. plaster finish and paint
6. finish frame
7. polycarbonate opaline diffuser

ANDROMEDA RECESSED 12 x 12

spot tilt/rotation: 10°, 70°, 355°

with finish frame: 11 1/8" x 11 1/8" (297mm x 297mm)

○ white (standard)

T5 circline/2GX13 **Cd/Klm**

	CODE	DESCRIPTION	WEIGHT
T5 circline/2GX13 - 22W + AR111/G53 - 35W MR16/GU5.3 - 35W	M115028	Andromeda recessed ceiling 12 x 12 1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB	7.7 lbs. / 3.50kg
	M115048	Andromeda recessed ceiling 12 x 12 1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB	7.7 lbs. / 3.50kg

ANDROMEDA RECESSED 12 x 24 suitable for inverted exposed "T" grid ceilings (NEMA Type G, max "T" width 1")

spot tilt/rotation: 10°, 70°, 355°

with finish frame: 11 1/8" x 23 1/2" (297mm x 597mm)

○ white (standard)

T5/G5 **Cd/Klm**

	CODE	DESCRIPTION	WEIGHT
T5/G5 - 14W or 24W HO + AR111/G53 - 35W MR16/GU5.3 - 35W	M115228	Andromeda recessed ceiling 12 x 24 2 x 14W FLU/EB + 2 x 35W AR111 HAL/EB	12.8 lbs. / 5.80kg
	M115248	Andromeda recessed ceiling 12 x 24 2 x 14W FLU/EB + 2 x 35W MR16 HAL/EB	12.8 lbs. / 5.80kg
	M115228H	Andromeda recessed ceiling 12 x 24 2 x 24W FLU/EB HO + 2 x 35W AR111 HAL/EB	12.8 lbs. / 5.80kg
	M115248H	Andromeda recessed ceiling 12 x 24 2 x 24W FLU/EB HO + 2 x 35W MR16 HAL/EB	12.8 lbs. / 5.80kg

ANDROMEDA RECESSED 12 x 36

spot tilt/rotation: 10°, 70°, 355°

with finish frame: 11 1/8" x 35 3/8" (297mm x 897mm)

○ white (standard)

T5/G5 **Cd/Klm**

	CODE	DESCRIPTION	WEIGHT
T5/G5 - 21W + AR111/G53 - 35W MR16/GU5.3 - 35W	M115328	Andromeda recessed ceiling 12 x 36 2 x 21W FLU/EB + 3 x 35W AR111 HAL/EB	18.0 lbs. / 8.20kg
	M115348	Andromeda recessed ceiling 12 x 36 2 x 21W FLU/EB + 3 x 35W MR16 HAL/EB	18.0 lbs. / 8.20kg

ANDROMEDA RECESSED 12 x 48 suitable for inverted exposed "T" grid ceilings (NEMA Type G, max "T" width 1")



11 7/16"
290mm

46 7/8"
1190mm

5 3/8"
137mm

11 7/16"
290mm

spot tilt/rotation

10°
70°
355°

with finish frame

11 1/8" x 47 1/8"
297mm x 1197mm

180°
90°
20
40
60
-90°

T5/G5

Cd/Klm

T5/G5 - 28W
+
AR111/G53 - 35W
MR16/GU5.3 - 35W

CODE	DESCRIPTION	WEIGHT
M115428	Andromeda recessed ceiling 12 x 48 2 x 28W FLU/EB + 4 x 35W AR111 HAL/EB	20.3 lbs. / 9.20kg
M115448	Andromeda recessed ceiling 12 x 48 2 x 28W FLU/EB + 4 x 35W MR16 HAL/EB	20.3 lbs. / 9.20kg

ANDROMEDA RECESSED 24 x 24 only suitable for inverted exposed "T" grid ceilings (NEMA Type G, max "T" width 1")



23 3/4"
603mm

5 3/8"
137mm

23 3/4"
603mm

white (standard)

spot tilt/rotation

10°
70°
355°

without finish frame

23 1/8"x23 1/8"
605mmx605mm

180°
90°
20
40
60
-90°

T5/G5

Cd/Klm

CODE	DESCRIPTION	WEIGHT
M115628	Andromeda rec. grid ceil. 24 x 24 3 x 14W FLU/EB + 4 x 35W AR111 HAL/EB	22.5 lbs. / 10.20kg
M115648	Andromeda rec. grid ceil. 24 x 24 3 x 14W FLU/EB + 4 x 35W MR16 HAL/EB	22.5 lbs. / 10.20kg
M115628H	Andromeda rec. grid ceil. 24 x 24 3 x 24W FLU/EB HO + 4 x 35W AR111 HAL/EB	22.5 lbs. / 10.20kg
M115648H	Andromeda rec. grid ceil. 24 x 24 3 x 24W FLU/EB HO + 4 x 35W MR16 HAL/EB	22.5 lbs. / 10.20kg

T5/G5 - 14W or 24W HO



+

AR111/G53 - 35W

MR16/GU5.3 - 35W

ANDROMEDA CEILING 12 x 12




	 12 5/16" 312mm  12 5/16" 312mm 5 11/16" 145mm	spot tilt/rotation   T5 circline/2GX13 Cd/Klm																					
● grey (standard)																							
T5 circline/2GX13 - 22W + AR111/G53 - 35W MR16/GU5.3 - 35W   	<table><tr><th>CODE</th><th colspan="2">DESCRIPTION</th><th>WEIGHT</th></tr><tr><td>M115728</td><td>Andromeda surface ceiling 12 x 12</td><td>1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB</td><td>8.8 lbs. / 4.00kg</td></tr><tr><td>M115748</td><td>Andromeda surface ceiling 12 x 12</td><td>1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB</td><td>8.8 lbs. / 4.00kg</td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>			CODE	DESCRIPTION		WEIGHT	M115728	Andromeda surface ceiling 12 x 12	1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB	8.8 lbs. / 4.00kg	M115748	Andromeda surface ceiling 12 x 12	1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB	8.8 lbs. / 4.00kg								
	CODE	DESCRIPTION		WEIGHT																			
	M115728	Andromeda surface ceiling 12 x 12	1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB	8.8 lbs. / 4.00kg																			
	M115748	Andromeda surface ceiling 12 x 12	1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB	8.8 lbs. / 4.00kg																			

ANDROMEDA CEILING 12 x 24








24 1/8"
612mm




12 5/16"
312mm

5 11/16"
145mm

spot tilt/rotation





T5/G5Cd/Klm

● grey (standard)

CODE	DESCRIPTION	WEIGHT
M115928	Andromeda surface ceiling 12 x 24 2 x 14W FLU/EB + 2 x 35W AR111 HAL/EB	15.0 lbs. / 6.80kg
M115948	Andromeda surface ceiling 12 x 24 2 x 14W FLU/EB + 2 x 35W MR16 HAL/EB	15.0 lbs. / 6.80kg
M115928H	Andromeda surface ceiling 12 x 24 2 x 24W FLU/EB HO + 2 x 35W AR111 HAL/EB	15.0 lbs. / 6.80kg
M115948H	Andromeda surface ceiling 12 x 24 2 x 24W FLU/EB HO + 2 x 35W MR16 HAL/EB	15.0 lbs. / 6.80kg

T5/G5 - 14W or 24W HO

+

AR111/G53 - 35W

MR16/GU5.3 - 35W







ANDROMEDA CEILING 12 x 36



35 7/8"
912mm

12 5/16"
312mm

5 11/16"
145mm


spot tilt/rotation

T5/G5Cd/Klm


● grey (standard)

CODE	DESCRIPTION	WEIGHT
M116028	Andromeda surface ceiling 12 x 36 2 x 21W FLU/EB + 3 x 35W AR111 HAL/EB	20.7 lbs. / 9.40kg
M116048	Andromeda surface ceiling 12 x 36 2 x 21W FLU/EB + 3 x 35W MR16 HAL/EB	20.7 lbs. / 9.40kg

ANDROMEDA CEILING 12 x 48

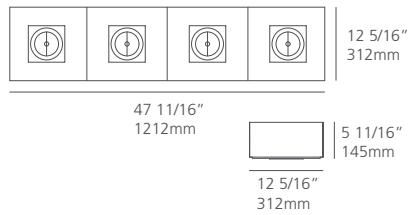

spot tilt/rotation



● grey (standard)

T5/G5


Cd/Klm

T5/G5 - 28W
 +
 AR111/G53 - 35W
 MR16/GU5.3 - 35W




CODE	DESCRIPTION	WEIGHT
M116128	Andromeda surface ceiling 12 x 48 2 x 28W FLU/EB + 4 x 35W AR111 HAL/EB	26.2 lbs. / 11.90kg
M116148	Andromeda surface ceiling 12 x 48 2 x 28W FLU/EB + 4 x 35W MR16 HAL/EB	26.2 lbs. / 11.90kg

ANDROMEDA CEILING 24 x 24

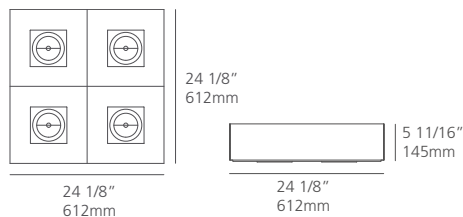

spot tilt/rotation



● grey (standard)

T5/G5

Cd/Klm



T5/G5 - 14W or 24W HO
 +
 AR111/G53 - 35W
 MR16/GU5.3 - 35W



CODE	DESCRIPTION	WEIGHT
M116328	Andromeda surface ceiling 24 x 24 3 x 14W FLU/EB + 4 x 35W AR111 HAL/EB	26.4 lbs. / 12.00kg
M116348	Andromeda surface ceiling 24 x 24 3 x 14W FLU/EB + 4 x 35W MR16 HAL/EB	26.4 lbs. / 12.00kg
M116328H	Andromeda surface ceiling 24 x 24 3 x 24W FLU/EB HO + 4 x 35W AR111 HAL/EB	26.4 lbs. / 12.00kg
M116348H	Andromeda surface ceiling 24 x 24 3 x 24W FLU/EB HO + 4 x 35W MR16 HAL/EB	26.4 lbs. / 12.00kg

ANDROMEDA SUSPENSION DIRECT 12 x 12




	 12 5/16" 312mm  max 51" 1300mm 5 11/16" 145mm  spot tilt/rotation 10° 70° 355°  T5 circline/2GX13 Cd/Klm ● grey (standard) <table><tr><th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr><tr><td>M116428</td><td>Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB</td><td>11.9 lbs. / 5.40kg</td></tr><tr><td>M116448</td><td>Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB</td><td>11.9 lbs. / 5.40kg</td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table> T5 circline/2GX13 - 22W + AR111/G53 - 35W MR16/GU5.3 - 35W   	CODE	DESCRIPTION	WEIGHT	M116428	Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB	11.9 lbs. / 5.40kg	M116448	Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB	11.9 lbs. / 5.40kg						
CODE	DESCRIPTION	WEIGHT														
M116428	Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W AR111 HAL/EB	11.9 lbs. / 5.40kg														
M116448	Andromeda susp. direct 12 x 12 1 x 22W FLU/EB + 1 x 35W MR16 HAL/EB	11.9 lbs. / 5.40kg														

ANDROMEDA SUSPENSION DIRECT 12 x 24







12 5/16"

312mm



max 51"

1300mm

5 11/16"

145mm

24 1/8"


612mm

12 5/16"

312mm

spot tilt/rotation





T5/G5

Cd/Klm

● grey (standard)

CODE	DESCRIPTION	WEIGHT
M116628	Andromeda susp. direct 12 x 24 2 x 14W FLU/EB + 2 x 35W AR111 HAL/EB	19.6 lbs. / 8.90kg
M116648	Andromeda susp. direct 12 x 24 2 x 14W FLU/EB + 2 x 35W MR16 HAL/EB	19.6 lbs. / 8.90kg
M116628H	Andromeda susp. direct 12 x 24 2 x 24W FLU/EB HO + 2 x 35W AR111 HAL/EB	19.6 lbs. / 8.90kg
M116648H	Andromeda susp. direct 12 x 24 2 x 24W FLU/EB HO + 2 x 35W MR16 HAL/EB	19.6 lbs. / 8.90kg

T5/G5 - 14W or 24W HO

+

AR111/G53 - 35W

MR16/GU5.3 - 35W







ANDROMEDA SUSPENSION DIRECT 12 x 36



● grey (standard)																								
<table><tr><th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr><tr><td>T5/G5 - 21W + AR111/G53 - 35W MR16/GU5.3 - 35W</td><td></td><td></td></tr></table>		CODE	DESCRIPTION	WEIGHT	T5/G5 - 21W + AR111/G53 - 35W MR16/GU5.3 - 35W			<table><tr><th>CODE</th><th>DESCRIPTION</th><th>WEIGHT</th></tr><tr><td>M116728</td><td>Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W AR111 HAL/EB</td><td>27.1 lbs. / 12.30kg</td></tr><tr><td>M116748</td><td>Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W MR16 HAL/EB</td><td>27.1 lbs. / 12.30kg</td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>		CODE	DESCRIPTION	WEIGHT	M116728	Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W AR111 HAL/EB	27.1 lbs. / 12.30kg	M116748	Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W MR16 HAL/EB	27.1 lbs. / 12.30kg						
CODE	DESCRIPTION	WEIGHT																						
T5/G5 - 21W + AR111/G53 - 35W MR16/GU5.3 - 35W																								
CODE	DESCRIPTION	WEIGHT																						
M116728	Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W AR111 HAL/EB	27.1 lbs. / 12.30kg																						
M116748	Andromeda susp. direct 12 x 36 2 x 21W FLU/EB + 3 x 35W MR16 HAL/EB	27.1 lbs. / 12.30kg																						

ANDROMEDA SUSPENSION DIRECT 12 x 48



● grey (standard)





T5/G5 **Cd/Klm**

T5/G5 - 28W
+
AR111/G53 - 35W
MR16/GU5.3 - 35W



CODE	DESCRIPTION	WEIGHT
M116828	Andromeda susp. direct 12 x 48 2 x 28W FLU/EB + 4 x 35W AR111 HAL/EB	34.5 lbs. / 15.70kg
M116848	Andromeda susp. direct 12 x 48 2 x 28W FLU/EB + 4 x 35W MR16 HAL/EB	34.5 lbs. / 15.70kg


ANDROMEDA SUSPENSION DIRECT 24 x 24



● grey (standard)

T5/G5 **Cd/Klm**

T5/G5 - 14W or 24W HO
+
AR111/G53 - 35W
MR16/GU5.3 - 35W



CODE	DESCRIPTION	WEIGHT
M117028	Andromeda susp. direct 24 x 24 3 x 14W FLU/EB + 4 x 35W AR111 HAL/EB	33.4 lbs. / 15.20kg
M117048	Andromeda susp. direct 24 x 24 3 x 14W FLU/EB + 4 x 35W MR16 HAL/EB	33.4 lbs. / 15.20kg
M117028H	Andromeda susp. direct 24 x 24 3 x 24W FLU/EB HO + 4 x 35W AR111 HAL/EB	33.4 lbs. / 15.20kg
M117048H	Andromeda susp. direct 24 x 24 3 x 24W FLU/EB HO + 4 x 35W MR16 HAL/EB	33.4 lbs. / 15.20kg

ANDROMEDA SUSPENSION DIRECT + INDIRECT 12 x 24



spot tilt/rotation

T5/G5

Cd/Klm

grey (standard)

CODE	DESCRIPTION	WEIGHT
M117228	Andromeda susp. dir. + ind. 12 x 24 4 x 14W FLU/EB + 2 x 35W AR111 HAL/EB	19.6 lbs. / 8.90kg
M117248	Andromeda susp. dir. + ind. 12 x 24 4 x 14W FLU/EB + 2 x 35W MR16 HAL/EB	19.6 lbs. / 8.90kg
M117228H	Andromeda susp. dir. + ind. 12 x 24 4 x 24W FLU/EB HO + 2 x 35W AR111 HAL/EB	19.6 lbs. / 8.90kg
M117248H	Andromeda susp. dir. + ind. 12 x 24 4 x 24W FLU/EB HO + 2 x 35W MR16 HAL/EB	19.6 lbs. / 8.90kg

T5/G5 - 14W or 24W HO

+

AR111/G53 - 35W

MR16/GU5.3 - 35W

ANDROMEDA SUSPENSION DIRECT + INDIRECT 12 x 36



Top view dimensions: 35 7/8" (912mm) width, 12 5/16" (312mm) depth.

Side view dimensions: 12 5/16" (312mm) depth, 5 11/16" (145mm) height, max 51" (1300mm) total height.

spot tilt/rotation

10°
70°
355°

160
120
80
40
40
-90° 90°

T5/G5 **Cd/Klm**

● grey (standard)

CODE	DESCRIPTION	WEIGHT
M117328	Andromeda susp. dir. + ind. 12 x 36 4 x 21W FLU/EB + 3 x 35W AR111 HAL/EB	26.7 lbs. / 12.10kg
M117348	Andromeda susp. dir. + ind. 12 x 36 4 x 21W FLU/EB + 3 x 35W MR16 HAL/EB	26.7 lbs. / 12.10kg

T5/G5 - 21W
+
AR111/G53 - 35W
MR16/GU5.3 - 35W




SHOWROOM BANG & OLUFSEN, MILAN (I),
SANDRO MARINI E ILARIO PESCO.

ANDROMEDA SUSPENSION DIRECT + INDIRECT 12 x 48







47 11/16"
1212mm


12 5/16"
312mm

max 51"
1300mm

5 11/16"
145mm

spot tilt/rotation





T5/G5 Cd/Klm


● grey (standard)

	CODE	DESCRIPTION	WEIGHT
T5/G5 - 28W + AR111/G53 - 35W MR16/GU5.3 - 35W	M117428	Andromeda susp. dir. + ind. 12 x 48 4 x 28W FLU/EB + 4 x 35W AR111 HAL/EB	33.7 lbs. / 15.30kg
	M117448	Andromeda susp. dir. + ind. 12 x 48 4 x 28W FLU/EB + 4 x 35W MR16 HAL/EB	33.7 lbs. / 15.30kg

ANDROMEDA SUSPENSION DIRECT + INDIRECT 24 x 24







24 1/8"
612mm


24 1/8"
612mm

max 51"
1300mm

5 11/16"
145mm

spot tilt/rotation







T5/G5 Cd/Klm

● grey (standard)

	CODE	DESCRIPTION	WEIGHT
T5/G5 - 14W or 24W HO + AR111/G53 - 35W MR16/GU5.3 - 35W	M117528	Andromeda susp. dir. + ind. 24 x 24 6 x 14W FLU/EB + 4 x 35W AR111 HAL/EB	33.0 lbs. / 15.00kg
	M117548	Andromeda susp. dir. + ind. 24 x 24 6 x 14W FLU/EB + 4 x 35W MR16 HAL/EB	33.0 lbs. / 15.00kg
	M117528H	Andromeda susp. dir. + ind. 24 x 24 6 x 24W FLU/EB HO + 4 x 35W AR111 HAL/EB	33.0 lbs. / 15.00kg
	M117548H	Andromeda susp. dir. + ind. 24 x 24 6 x 24W FLU/EB HO + 4 x 35W MR16 HAL/EB	33.0 lbs. / 15.00kg

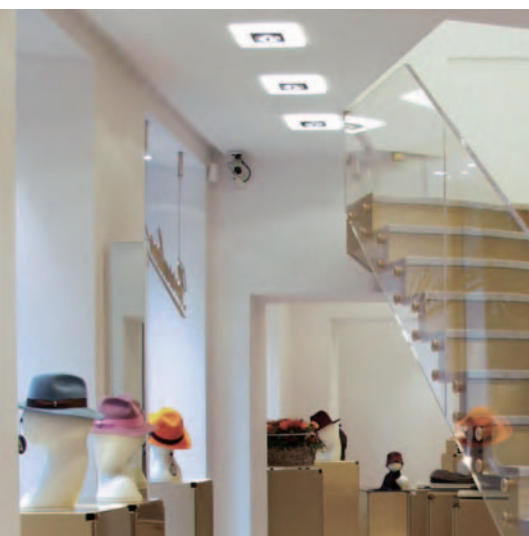


SHOWROOM BORSALINO, MILAN (I), GIOVANNI BO

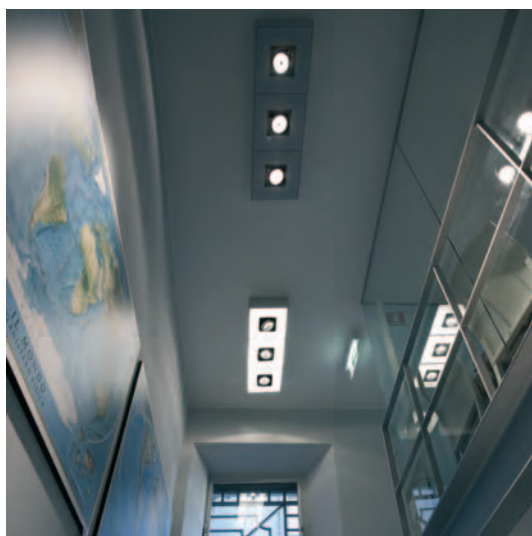

WHITE STAR ADVENTURE, MILAN (I), CARLA CELESTINO



WHITE STAR ADVENTURE, MILAN (I), CARLA CELESTINO

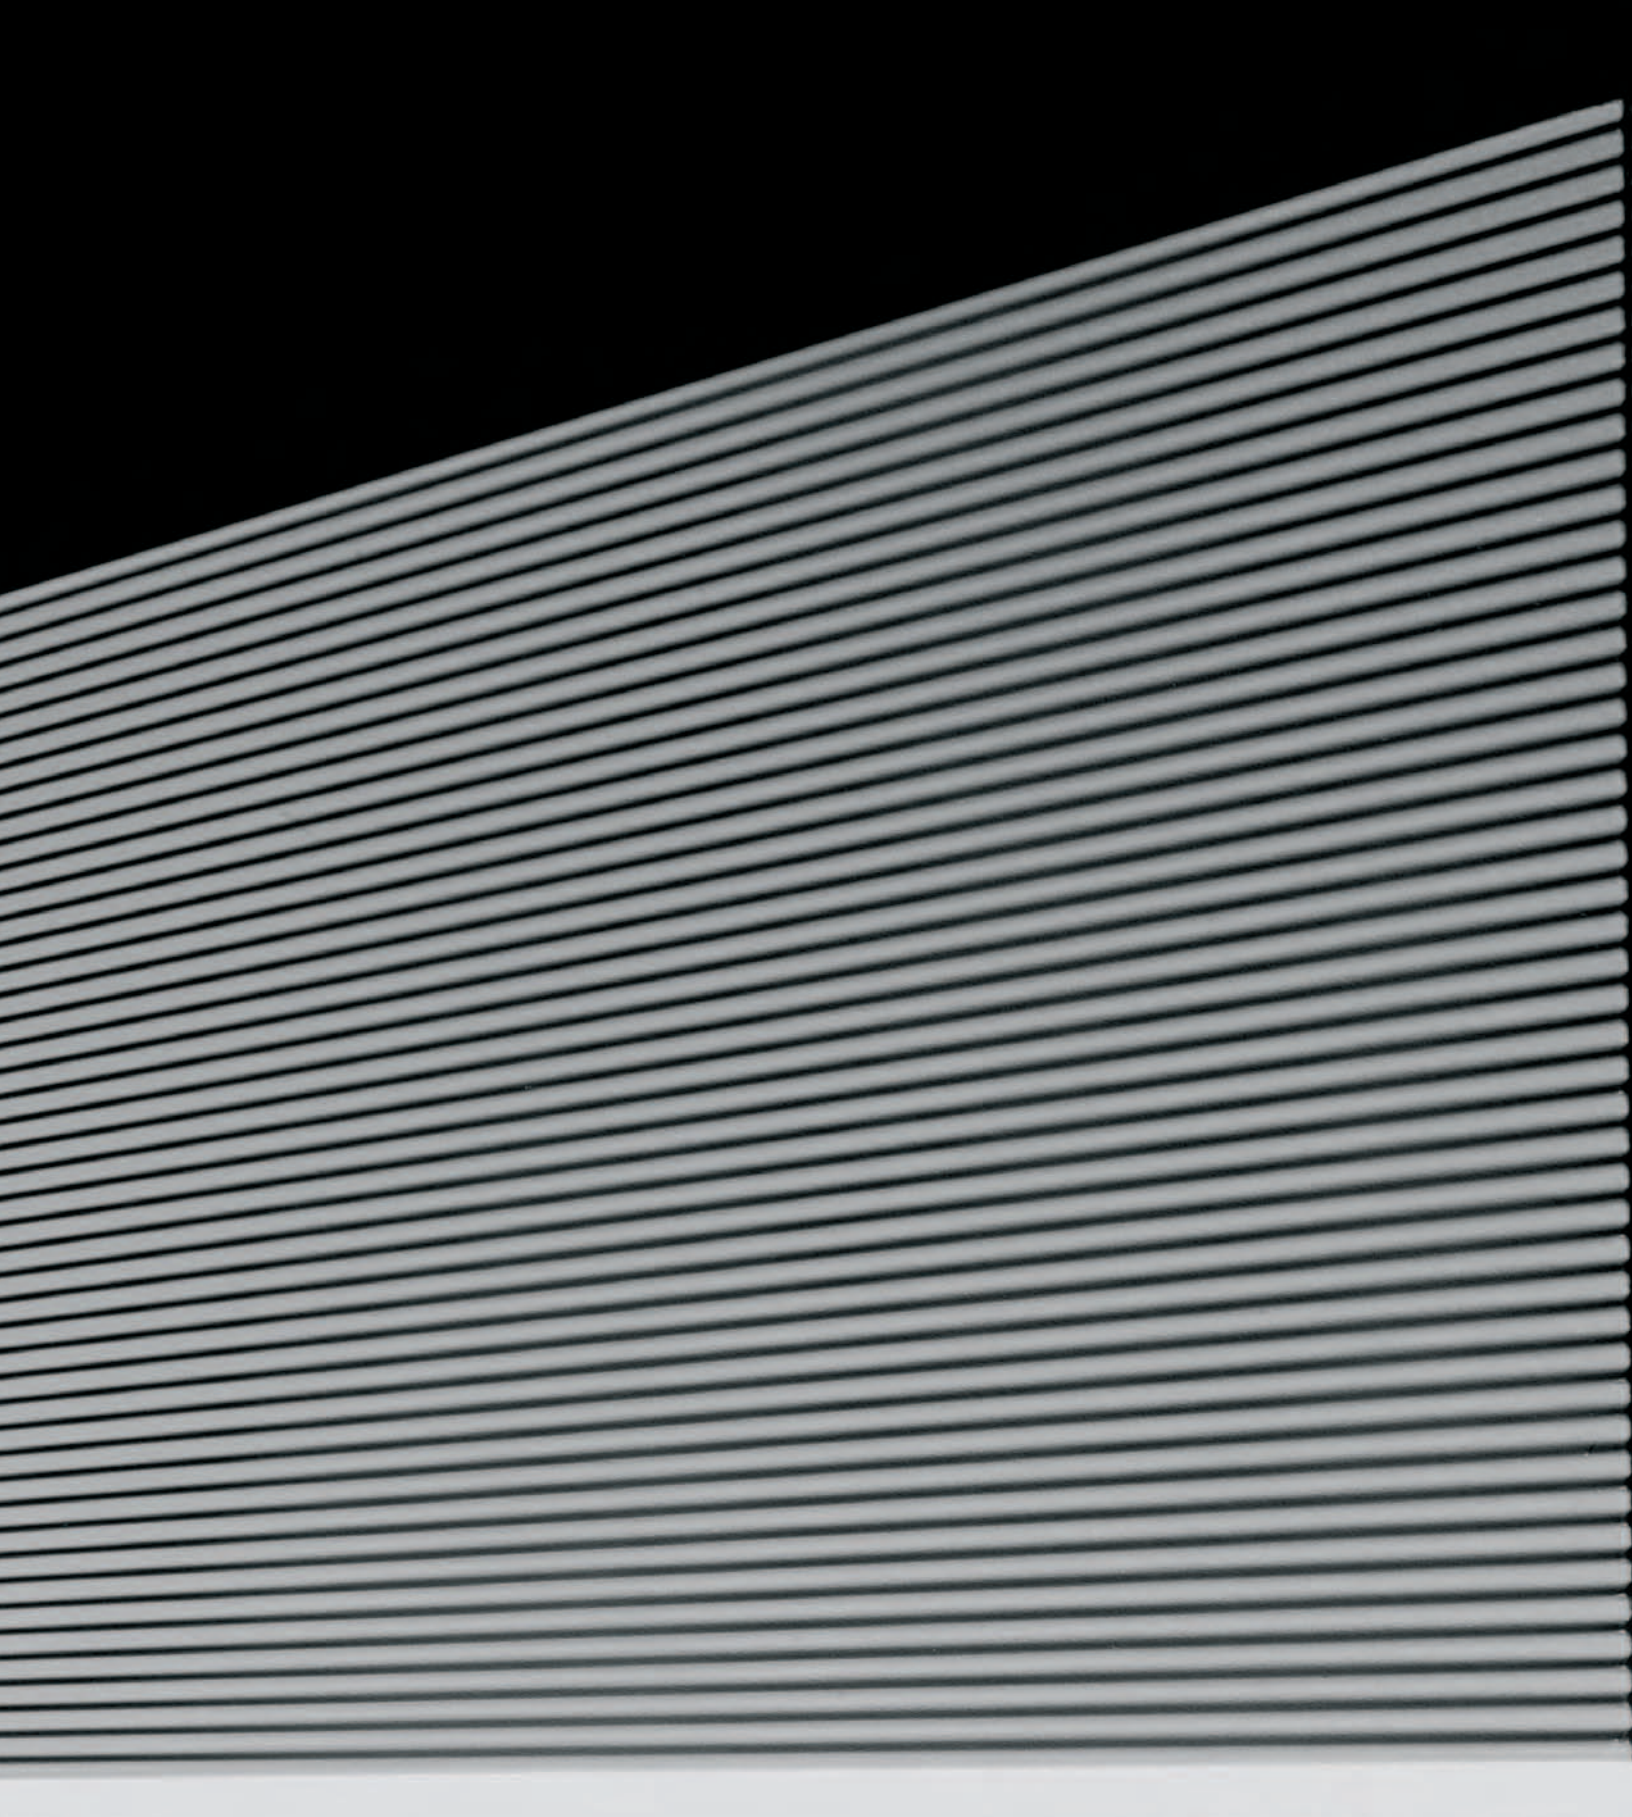

Artemide[®]
ARCHITECTURAL

For more information please contact:
USA: 1-877-Art-9111 or online at artemide.us
Canada: 1-888-777-Arte or online at artemide.ca