



Standard Features & Accessories

All models include

- Capacity—19.1 cu. ft. (541.0 L)
 - 84"H./24"D.
- ProChill™ Temperature Management System
 - Variable-speed DC Overdrive™ Compressor is one of the quietest, most technologically advanced compressors available
 - Electronic controls maintain the temperature selection within 1°F
 - Multi-channel airflow system and Odor Eliminator™ Evaporator removes odors and excess humidity
- Six adjustable half-width wire shelves
- One full-width metal shelf
- Two full-width slide-out wire baskets with tempered glass fronts
- Factory-installed automatic ice maker
- One full-width ice storage drawer with two separate metal ice bins
- Full-extension precision ball-bearing glides on all baskets and drawers
- Five patented adjustable aluminum door bins with tempered glass fronts
- Adaptive defrost
- All-metal freezer interior
- Super Clog-Resistant™ Condenser is maintenance-free under normal use
- Tru-Flush™ design
 - Allows Professional Integrated and Custom Panel models to fit flush into 24" deep installation cutout
- Open door alarm sounds and glows to warn that door has been ajar for three minutes
- Adjustable door stops standard—90°, 110°, or 120° swing
- Sabbath Mode
- For installation of two units side-by-side, a separate grille kit accessory must be purchased
- Must be ordered right or left hinge. (As you face unit, RIGHT has hinge on right side and handle on left side; LEFT has hinge on left side and handle on right side.)

Model Options



VCFB536/VIFB536
Professional/Professional Integrated



DFFB536
Custom Front

FINISH DETAILS FOR VCFB/VIFB MODELS

- Stainless Steel (SS), Black (BK), White (WH), Metallic Silver (MS), Graphite Gray (GG), Stone Gray (SG), Taupe (TP), Biscuit (BT), Cotton White (CW), Oyster Gray (OG), Golden Mist (GM), Lemonade (LE), Sage (SA), Mint Julep (MJ), Sea Glass (SE), Iridescent Blue (IB), Viking Blue (VB), Pumpkin (PM), Racing Red (RR), Apple Red (AR), Burgundy (BU), Plum (PL), Chocolate (CH), and Cobalt Blue (CB).
- Finish codes designate door front. Stainless steel upper grille, side trim, handle, (with chrome-plated brackets); black lower kickplate.
- Brass Trim Option (BR)—nameplate, handle/brackets, and side trim. Brass components have a durable protective coating for maintenance-free normal use.

FINISH DETAILS FOR DFFB MODEL

- Handle not included—opt for custom handle, or purchase a Viking Professional Series or Designer Series handle kit (see **Installation Notes & Accessories**).
- See **Custom Panels** section for more information and additional specifications.

ORDERING INSTRUCTIONS

First specify model number, followed by hinge preference ("R" for right or "L" for left), and then color code (VCFB536**RSS**). If ordering optional brass trim, specify code at end (VCFB536**RSSBR**).





VIKING DESIGNER

REFRIGERATION

Quiet Cool™ Built-In 36" W. All Freezer



★ Please see Installation Notes & Accessories for important information, including panel, grille, trim, and handle kits.



ALL MODELS



Star-K Kosher Certification for use on the Jewish Sabbath or Jewish holidays

Dimensions & Specifications

PRODUCT DIMENSIONS



VCFB536/VIFB536 Professional/ Professional Integrated

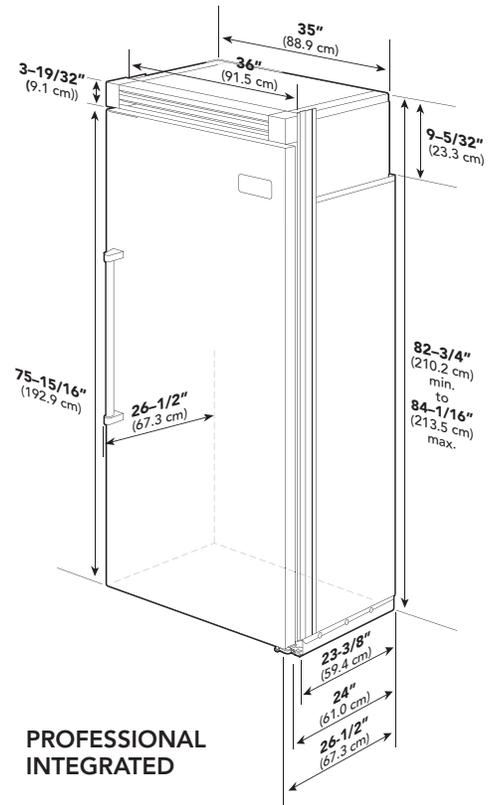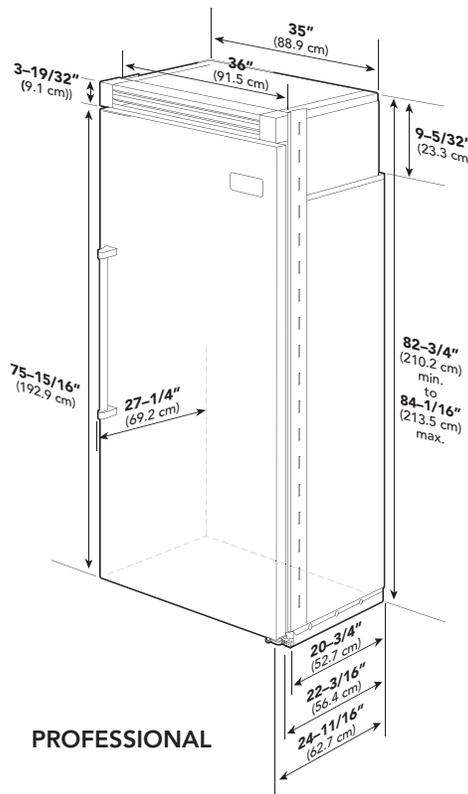

| | VCFB536 | VIFB536 |
|------------------------------|---|-------------------|
| Overall width | 36" (91.5 cm) | |
| Overall height (from bottom) | 82-3/4" (210.2 cm) min. to 84-1/16" (213.5 cm) max. | |
| Overall depth (from rear) | | |
| To front edge of side trim | 22-3/16" (56.4 cm) | 23-3/8" (59.4 cm) |
| To front of top grille | 24-11/16" (62.7 cm) | 24" (61.0 cm) |
| To front of handle | 27-1/4" (69.2 cm) | 26-1/2" (67.3 cm) |
| Approx. ship weight | 500 lbs. (227.3 kg) | |





★ Please see **Installation Notes & Accessories** for important information, including panel, grille, trim, and handle kits.



ALL MODELS

Star-K Kosher Certification for use on the Jewish Sabbath or Jewish holidays


Dimensions & Specifications

PRODUCT DIMENSIONS



DFFB536
Custom Front

See **Custom Panels** section for more information and additional specifications.

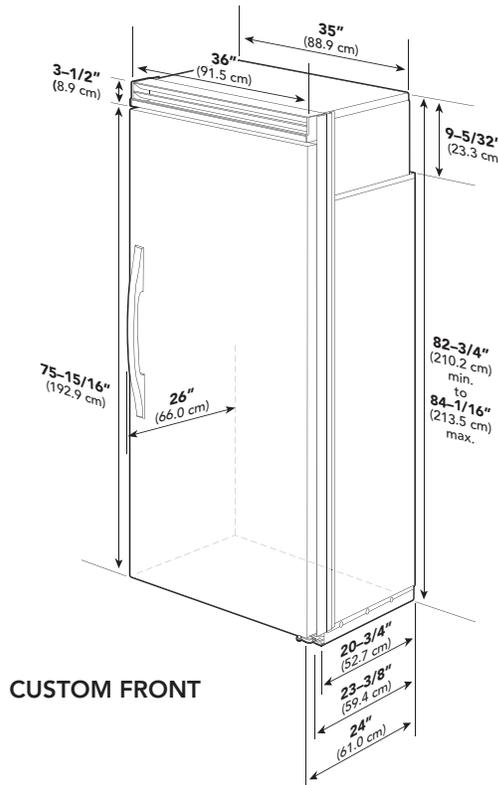

CUSTOM FRONT

| DFFB536 | |
|------------------------------|--|
| Overall width | 36" (91.5 cm) |
| Overall height (from bottom) | 82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max. |
| Overall depth (from rear) | |
| To front edge of side trim | 23-13/16" (60.5 cm) |
| To front of top grille | 24-3/4" (62.9 cm) |
| To front of handle | Varies |
| Approx. ship weight | 500 lbs. (227.3 kg) |



Dimensions & Specifications

DOOR SWING

- Adjustable door stops standard—90°, 110°, or 120° swing





VCFB536/VIFB536
**Professional/
Professional Integrated**



DFFB536
Custom Front




See **Custom Panels** section for more information and additional specifications.

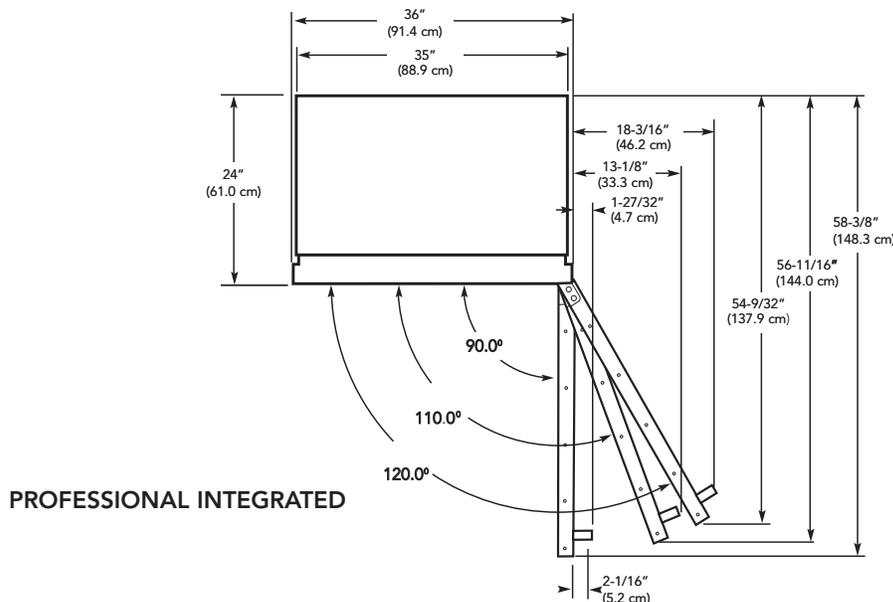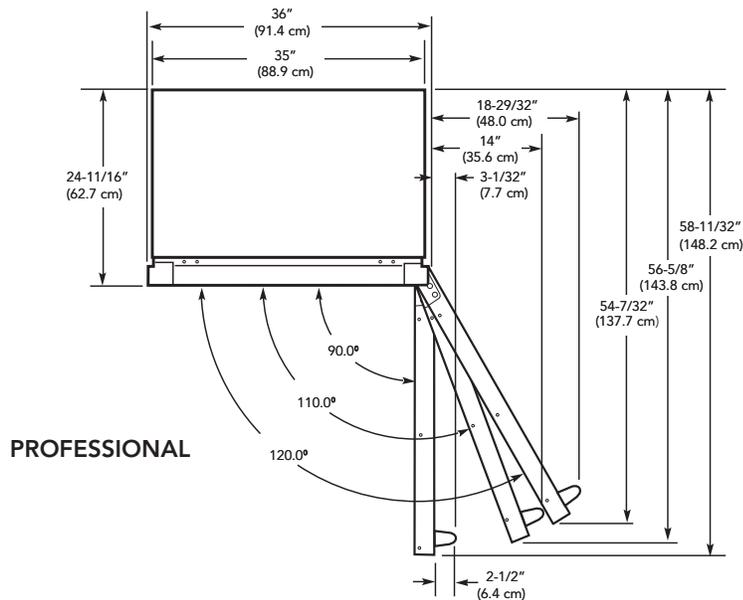



Dimensions & Specifications




CLEARANCE DIMENSIONS—PROFESSIONAL

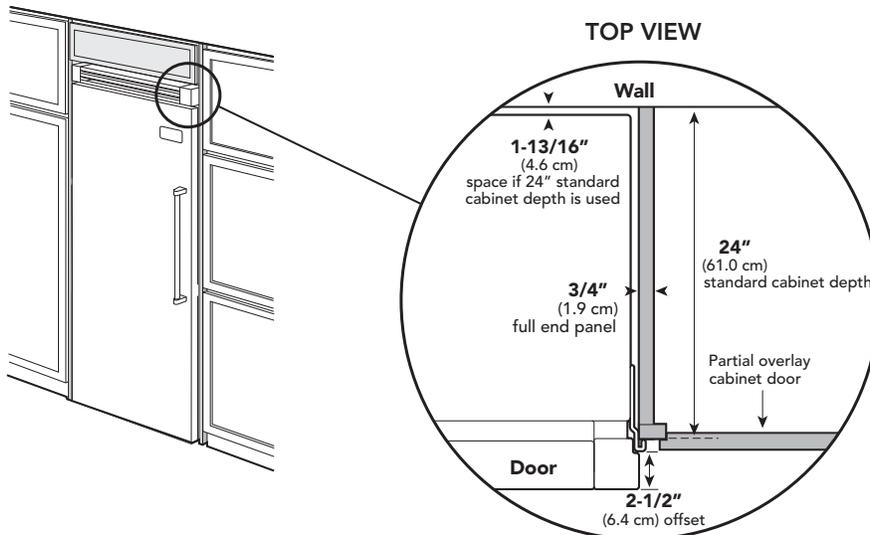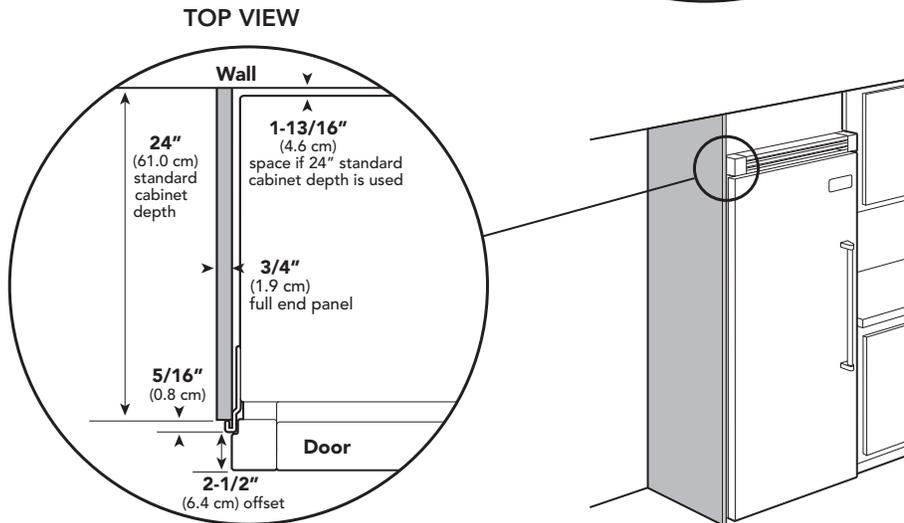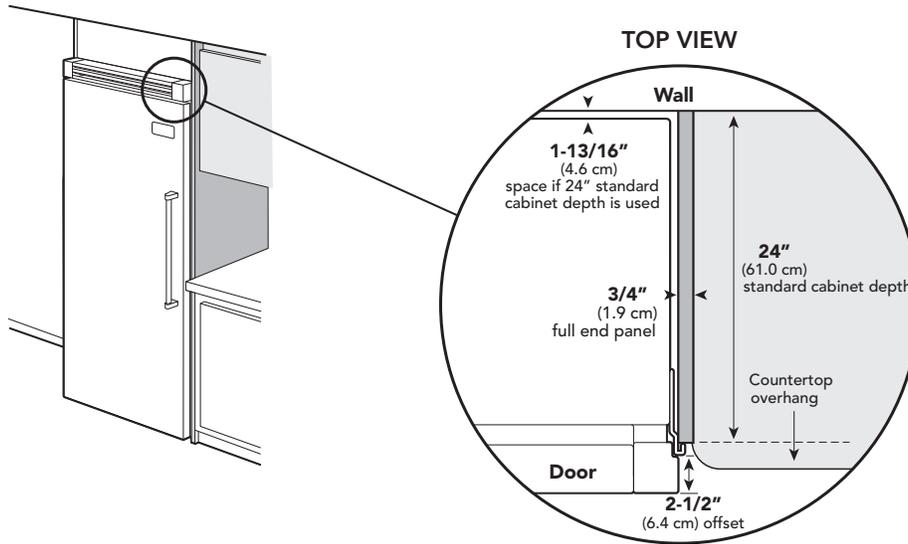



Dimensions & Specifications

CLEARANCE DIMENSIONS— PROFESSIONAL INTEGRATED

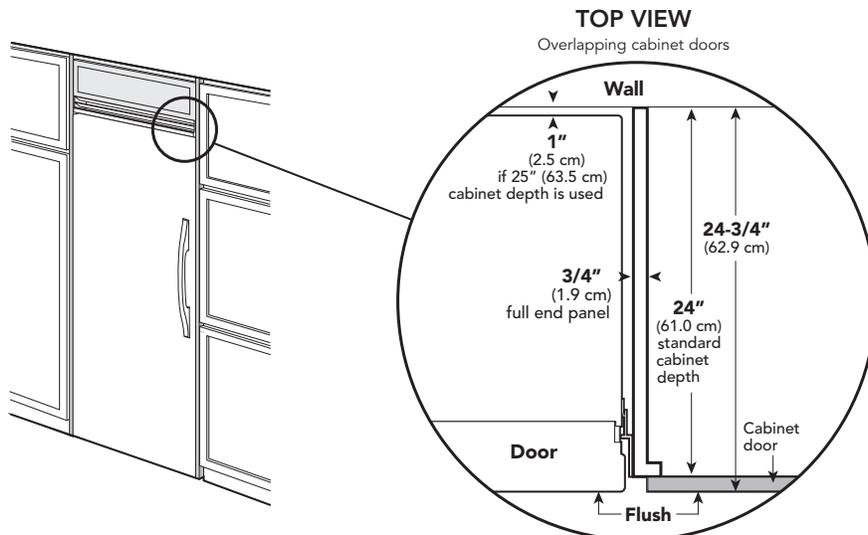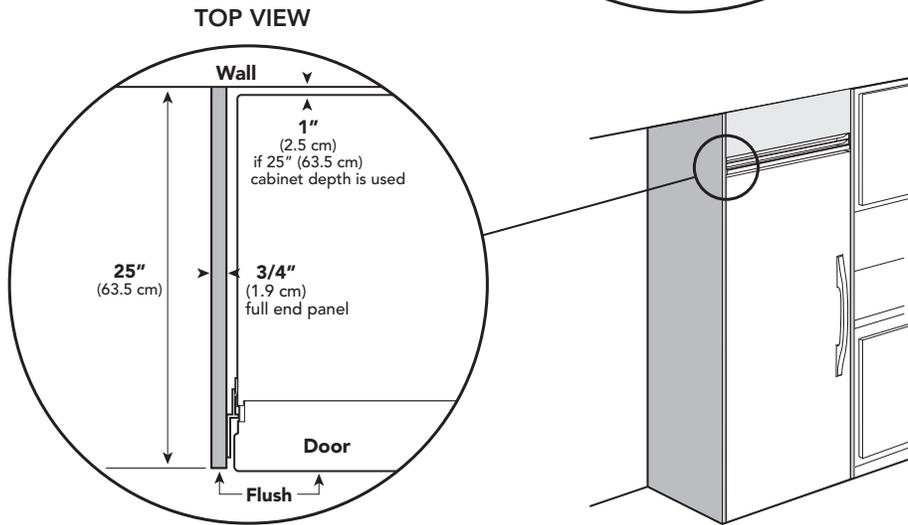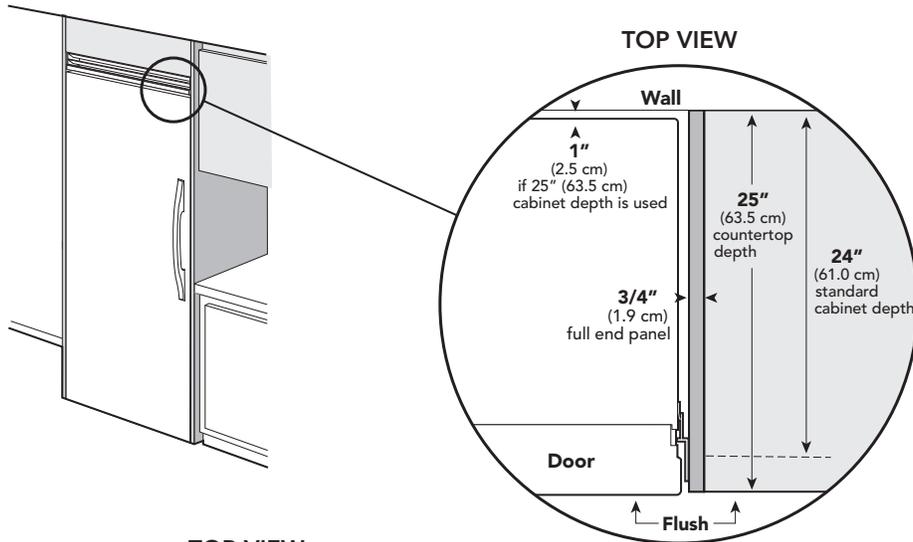



UTILITY REQUIREMENTS



GAS
Not applicable



- ELECTRICAL**
- Three-wire cord with grounded three-prong plug attached to product
 - 115 VAC/60 Hz; 15 amp dedicated circuit
 - Maximum amp usage—9.5
 - Estimated energy usage—601 kWh/year



- PLUMBING**
- Inlet waterline requirements—1/4" copper tubing
 - 20 psi min.; 120 psi max.

Installation Requirements

ACCESS REQUIREMENTS – Single Installation




VCFB536/VIFB536
Professional/
Professional Integrated



DFFB536
Custom Front

See Custom Panels section for more information and additional specifications.

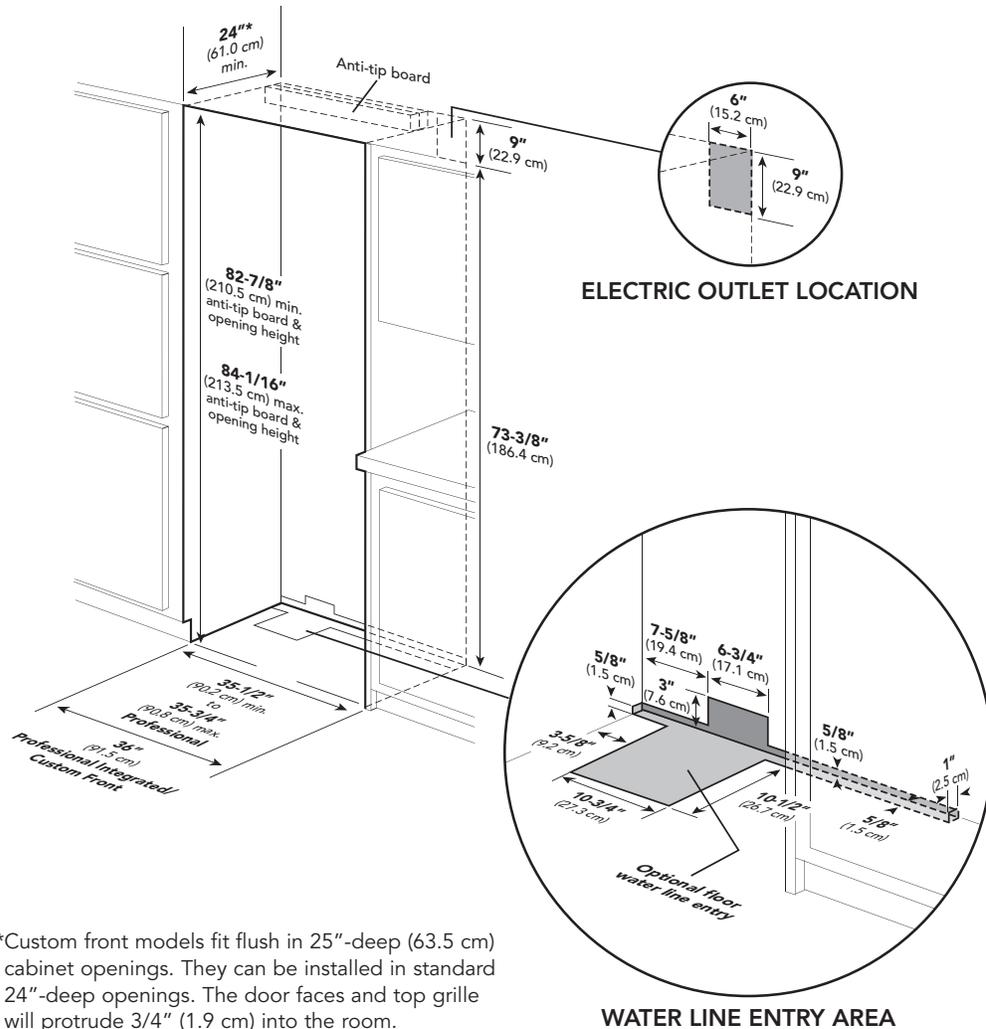



*Custom front models fit flush in 25"-deep (63.5 cm) cabinet openings. They can be installed in standard 24"-deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.

| | VCFB536 | VIFB536 | DFFB536 |
|---------------|---|---------------|---------------|
| Cutout width | 35-1/2" (90.2 cm) min. to 35-3/4" (90.8 cm) max. | 36" (91.5 cm) | 36" (91.5 cm) |
| Cutout height | 82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max. | | |
| Cutout depth | 24" (61.0 cm) min.* | | |



Installation Requirements

ACCESS REQUIREMENTS – Dual Installation

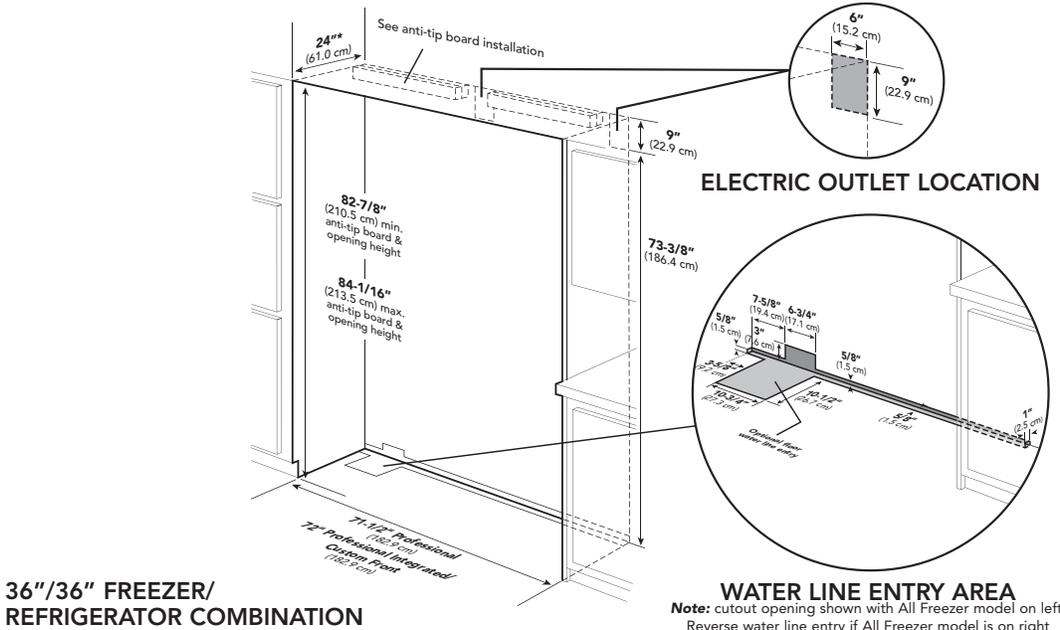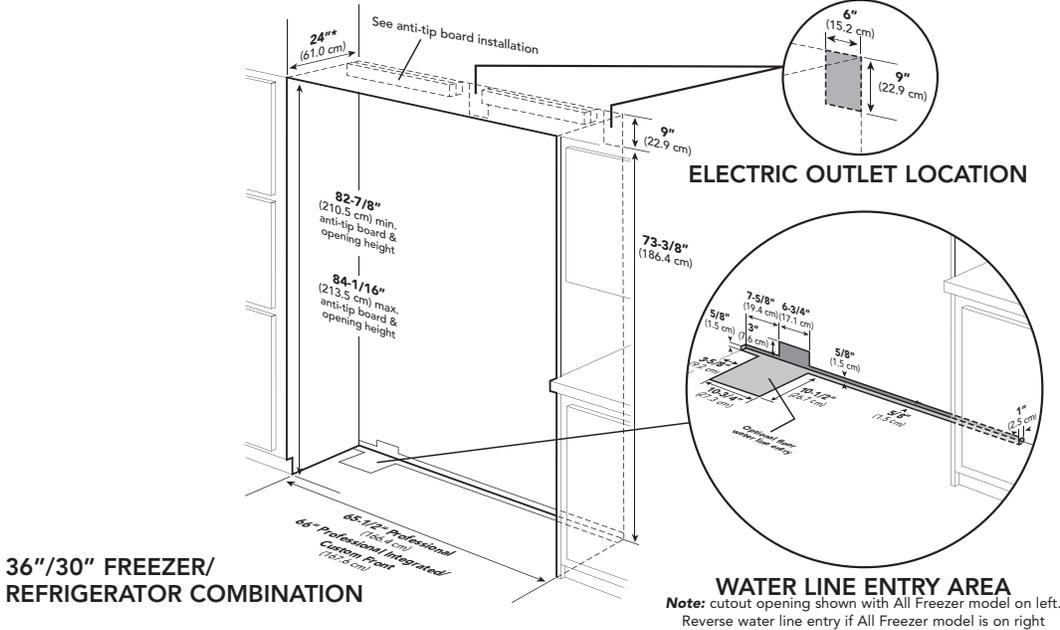

*Custom front models fit flush in 25"-deep (63.5 cm) cabinet openings. They can be installed in standard 24"-deep openings. The door faces and top grille will protrude 3/4" (1.9 cm) into the room.

| | VCFB536/VCRB530 | VIFB536/VIRB530 | DFFB536/DFRB530 |
|---------------|---|-----------------|-----------------|
| Cutout width | 65-1/2" (166.4 cm) | 66" (167.6 cm) | 66" (167.6 cm) |
| Cutout height | 82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max. | | |
| Cutout depth | 24" (61.0 cm) min.* | | |

| | VCFB536/VCRB536 | VIFB536/VIRB536 | DFFB536/DFRB536 |
|---------------|---|-----------------|-----------------|
| Cutout width | 71-1/2" (181.6 cm) | 72" (182.9 cm) | 72" (182.9 cm) |
| Cutout height | 82-7/8" (210.5 cm) min. to 84-1/16" (213.5 cm) max. | | |
| Cutout depth | 24" (61.0 cm) min.* | | |



★ Installation Notes & Accessories

Side Panel Kits

- Stainless Steel (SS)
- Panels provide finished, freestanding look; unit must still be secured to the wall
- Kit includes one panel and installation hardware

| Model | Description | Approx. ship wt. lbs. (kg) |
|--------|---------------------------------------|----------------------------|
| PSSPL2 | Professional side panel left (VCFB) | 45 (20.2) |
| PSSPR2 | Professional side panel right (VCFB) | 45 (20.2) |
| DSSPL2 | Designer side panel left (VIFB/DFFB) | 45 (20.2) |
| DSSPR2 | Designer side panel right (VIFB/DFFB) | 45 (20.2) |

Side Panel Hardware Kit

- For use with Designer built-in refrigerator/freezers
- Hardware allows installation of custom side panels
- Kit includes brackets, screws, and installation instructions to mount panels on left and right side

| Model | Description | Approx. ship wt. lbs. (kg) |
|--------|---------------------|----------------------------|
| SPHKDS | Side panel hardware | 3 (1.4) |

Top Panel Kit

- Stainless Steel (SS)
- Panel provides finished, freestanding look; unit must still be secured to the wall
- Kit includes one panel and installation hardware

| Model | Description | Approx. ship wt. lbs. (kg) |
|--------|-----------------|----------------------------|
| TOP-36 | 36"W. top panel | 22 (10.0) |

Top Grille Kits

- Stainless Steel (SS)
- 66"W. top grille kit—for use with installation of one 36"W. and one 30"W. all refrigerators/all freezers side-by-side
- 72"W. top grille kit—for use with installation of two 36"W. all refrigerators/all freezers side-by-side
- Grille creates a single unit look
- Kit includes one full-length grille, center cabinet trim connector, and all installation hardware

| Model | Description | Approx. ship wt. lbs. (kg) |
|----------|--|----------------------------|
| PGK66-SS | Professional 66"W. grille (for two VCRB/VCFB units) | 23 (10.4) |
| PGK72-SS | Professional 72"W. grille (for two VCRB/VCFB units) | 25 (11.3) |
| IGK66-SS | Professional Integrated 66"W. grille (for two VIRB/VIFB units) | 23 (10.4) |
| IGK72-SS | Professional Integrated 72"W. grille (for two VIRB/VIFB units) | 25 (11.3) |
| DGK66-SS | Designer 66"W. grille (for two DFRB/DFFB units) | 23 (10.4) |
| DGK72-SS | Designer 72"W. grille (for two DFRB/DFFB units) | 25 (11.3) |

Center Trim Kit

- Stainless Steel (SS)
- Kit includes center cabinet trim connector to install two custom front units with wood top grille

| Model | Description | Approx. ship wt. lbs. (kg) |
|---------|-------------|----------------------------|
| FCTK-SS | Center trim | 5 (2.3) |





REFRIGERATION

Quiet Cool™ Built-In 36" W. All Freezer



Handle Kits

- For use with custom front freezers
- For use on locally supplied full custom front panels
- Handles allow refrigerator/freezers with custom front panel to coordinate with other Professional and Designer products
- Kit includes handle(s) and installation hardware

| Model | Description | Approx. ship wt. lbs. (kg) |
|-------------|--|----------------------------|
| PHK28-SS | Professional one handle (Stainless Steel) | 7 (3.2) |
| PHK28-BR | Professional one handle (Brass) | 7 (3.2) |
| DHK25-SS | Designer one handle (Stainless Steel) | 7 (3.2) |
| DHK25-BR | Designer one handle (Brass) | 7 (3.2) |
| PHKDFSB5-SS | Professional two handles (Stainless Steel) | 10 (4.5) |
| PHKDFSB5-BR | Professional two handles (Brass) | 10 (4.5) |
| HKFDS-SS | Designer two handles (Stainless Steel) | 10 (4.5) |
| HKFDS-BR | Designer two handles (Brass) | 10 (4.5) |

Compliance Information



WARRANTY SUMMARY*

- Two-year full warranty—complete unit
- Six-year full warranty—sealed refrigeration system and automatic ice maker
- Twelve-year limited warranty—sealed refrigeration system (includes compressor, condenser, dryer/strainer, evaporator, and connecting tubing)
- Ninety-day limited—cosmetic parts such as glass, painted, and decorative items

* For complete warranty see *Use & Care Guide*. Warranty valid on Viking products shipped within the United States and Canada.

