

BARRIER FREE

CADETTM ROUND COUNTERTOP SINK

CADET™ ROUND COUNTERTOP SINK

- European-styled interior bowl
- Available with Scotchgard® finish for easier cleaning
- · Made from vitreous china
- Self-rimming with cutout template supplied
- Front overflow
- ☐ 0427.444 Faucet holes on 4" (102mm) centers (illustrated)
- ☐ 0427.888 Faucet holes on 8" (203mm) centers
- **□ 0427.111** Center hole only
- ☐ 0427.444SG Faucet holes on 4" (102mm) centers (with Scotchgard® finish)
- ☐ 0427.888SG Faucet holes on 8" (203mm) centers (with Scotchgard® finish)







Nominal Dimensions:


19" dia. (483mm) Round

Bowl sizes:

15-1/4" (387mm) wide 12-1/4" (311mm) front to back 6" (152mm) deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

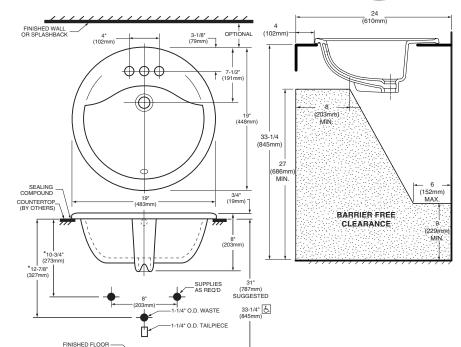

To Be Specified:

- Color:
- ☐ Faucet*:
- □ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:

^{*} See faucet section for additional models available



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Install lavatory 864mm (34") from finished floor. Lavatory installed 51mm (2") minimum from front edge of countertop provides 686mm (27") knee clearance area.

NOTES:

 \star DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.