



MR11 Ring Mount **MODEL DL2**
12 Volt, 20 Watt Max., MR11 Halogen

Specifications:

Body: Machined 6061-T6 aluminum or C36000 brass body with cast brass loop allows fixture to be hung from a chain, cable, or hook. (Hanging hardware not included). A molded high temperature silicone wire pass-thru prevents water from entering thru rear of body or around socket leads.

Cap: Machined 6061-T6 aluminum or C36000 brass cap threads on to body, allowing tool-less removal of cap, and is sealed to the body with a high temperature silicone O-ring. Accepts up to two internal accessories, held in place by a stainless steel clip.

Finish: TGIC thermo set polyester powder coat paint available in 14 standard colors. On aluminum model, finish is applied over a corrosion resistant chromate conversion coating. Aluminum model available in one additional metal finish: Clear Anodized. Brass model available in three additional metal finishes:


Natural, Polished, and Aged.

Socket: Double contact bayonet socket with 600V, 250° C, PTFE coated 18 ga leads.

Lamp: Double contact bayonet base MR11 up to 20 watts.

Lens: 1/8" thick, tempered, clear lens, secured to cap with a high temperature, curing, silicone adhesive.

Certification: CSA tested & certified to US and Canadian safety standards for wet location use per UL1598.

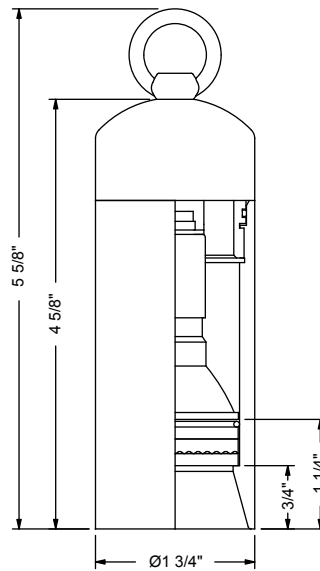

Ordering Information:

Model	Finish	C2 Cap Style	Lamp	Lens Accy ¹	Filter ¹	Louver ¹
DL2A - Aluminum	BL - Black	C2 - Regress Lens	0 - None	0 - None	0 - None	0 - None
DL2B - Brass	BLT - Textured Black		MR11 Halogen:	L1 - Spread Lens	F1 - Red	H1 - Honeycomb Louver
	BN - Bronze		16 - 12W, 8° Narrow Spot	L2 - Linear Lens	F2 - Blue	
	BNT - Textured Bronze		17 - FSS, 20W, 8° Narrow Spot	L3 - Softening Lens	F3 - Light Blue	
	BAT - Textured Bark		18 - FST, 20W, 19° Spot		F4 - Green	
	WI - White		19 - FSV, 20W, 28° Narrow Flood		F5 - Amber	
	GRT - Textured Green				F6 - Pink	
	SI - Silver					
	GY - Grey					
	BE - Beige					
	GNT - Textured Granite					
	SAT - Textured Sand					
	PAT - Textured Patina					
	EAT - Textured Earth					
	CLA - Clear Anodized (DL2A only)					
	NAT - Natural (DL2B only)					
	POL - Polished (DL2B only)					
	AGE - Aged (DL2B only)					

Notes:

1. Only two lens options may be specified.
2. Specifications, certifications, and ordering information are subject to change. Please check website for latest specification sheets.

Example: **DL2A - BL - C2 - 0 - 0 - F2 - H1**