

DELTA LAVATORY FAUCETS

- Two Handle
- LHP-Less Handle Program
- 3 Hole Sink Applications
- 4" Centerset

Submitted Model No.: _____

Specific Features: _____



UL Listed to US and Canadian Safety Standards and Classified in accordance with ANSI/NSF 61 21PL





COMPLIES WITH:

- NSF 61
- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Two handle lavatory deck faucets for exposed mounting on three hole sinks.
- 4" (102 mm) centerset.
- Solid brass fabricated body.
- LHP-Less Handle Program. See handle kit options on back.
- Hot and cold stems are interchangeable.
- 1/4 turn stops.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Models have metal drain with pop-up type fitting with plated flange and stopper.*

*Applies to LHP models only.

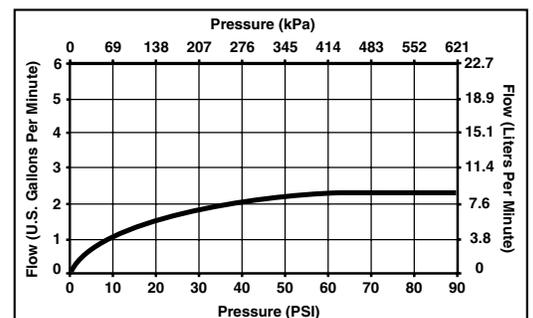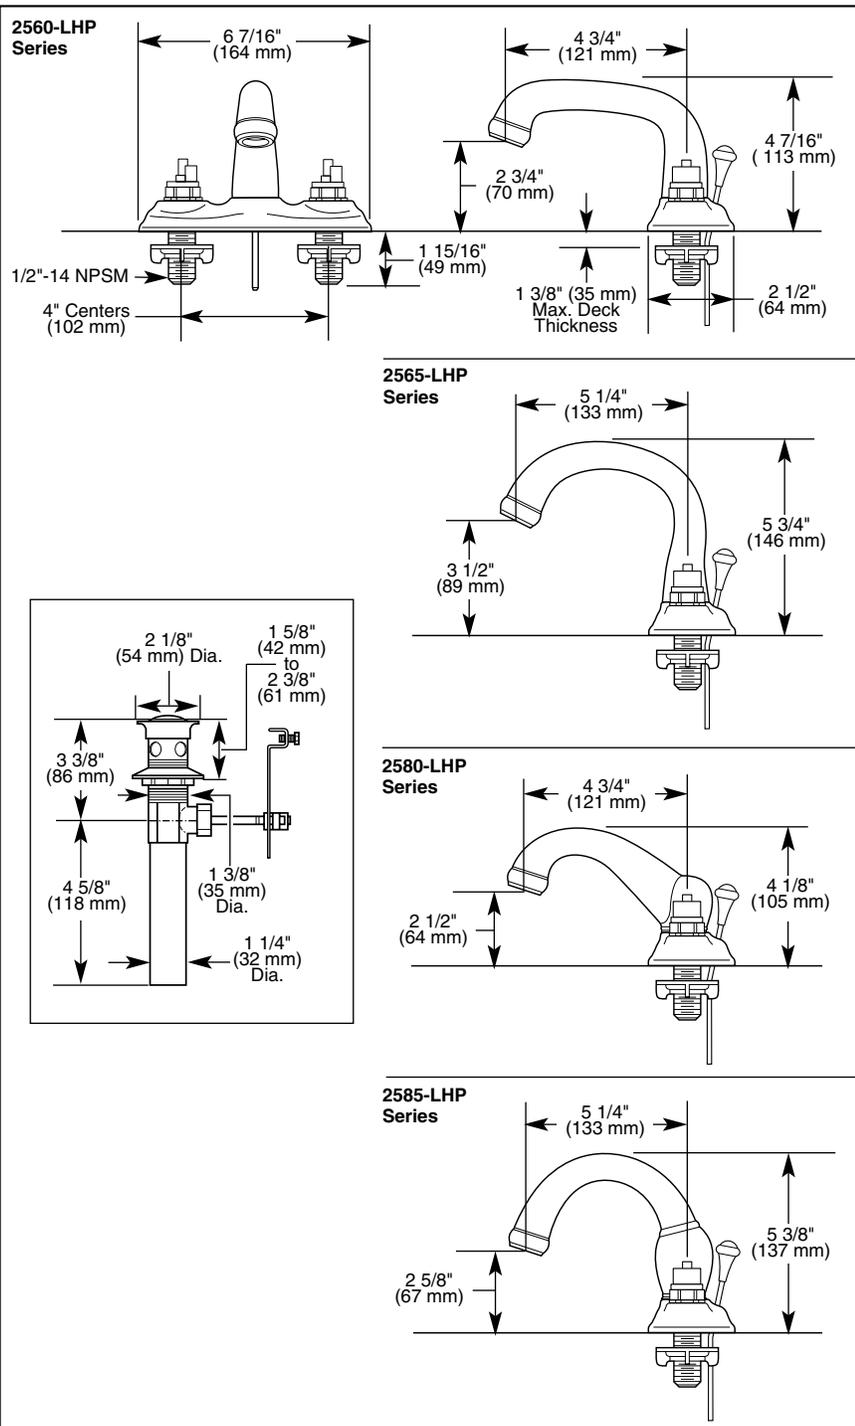


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

| Standard Features | 2560-LHP | 2560-CBLHP | 2565-LHP | 2565-CBLHP | 2580-LHP | 2580-CBLHP | 2585-LHP | 2585-CBLHP |
|---|----------|------------|----------|------------|----------|------------|----------|------------|
| Washerless | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| Three Hole Installation | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| 4" (102 mm) Centerset | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| 4 3/4" (121 mm) Long, 2 3/4" (70 mm) High Rigid Spout | ◆ | ◆ | | | | | | |
| 5 1/4" (133 mm) Long, 3 1/2" (89 mm) High Rigid Spout | | | ◆ | ◆ | | | | |
| 4 3/4" (121 mm) Long, 2 1/2" (64 mm) High Rigid Spout | | | | | ◆ | ◆ | | |
| 5 1/4" (133 mm) Long, 2 5/8" (67 mm) High Rigid Spout | | | | | | | ◆ | ◆ |
| Less Handle Program See Handle Kit Options* | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| Brass Stems and 1/4 Turn Stops | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| 1/2"-14 NPSM Threaded Male Inlet Shanks | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| Metal Pop-Up Drain** | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ | ◆ |
| Chrome Finish | ◆ | | ◆ | | ◆ | | ◆ | |
| Chrome and <i>Brilliance</i> ® Polished Brass Finish | | ◆ | | ◆ | | ◆ | | ◆ |

*Available LHP Handle Options

**Applies to LHP Models Only

▲ Specify Finish

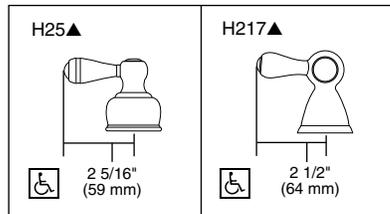

Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2003 Masco Corporation of Indiana