



Model 62301-LHP Shown



Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

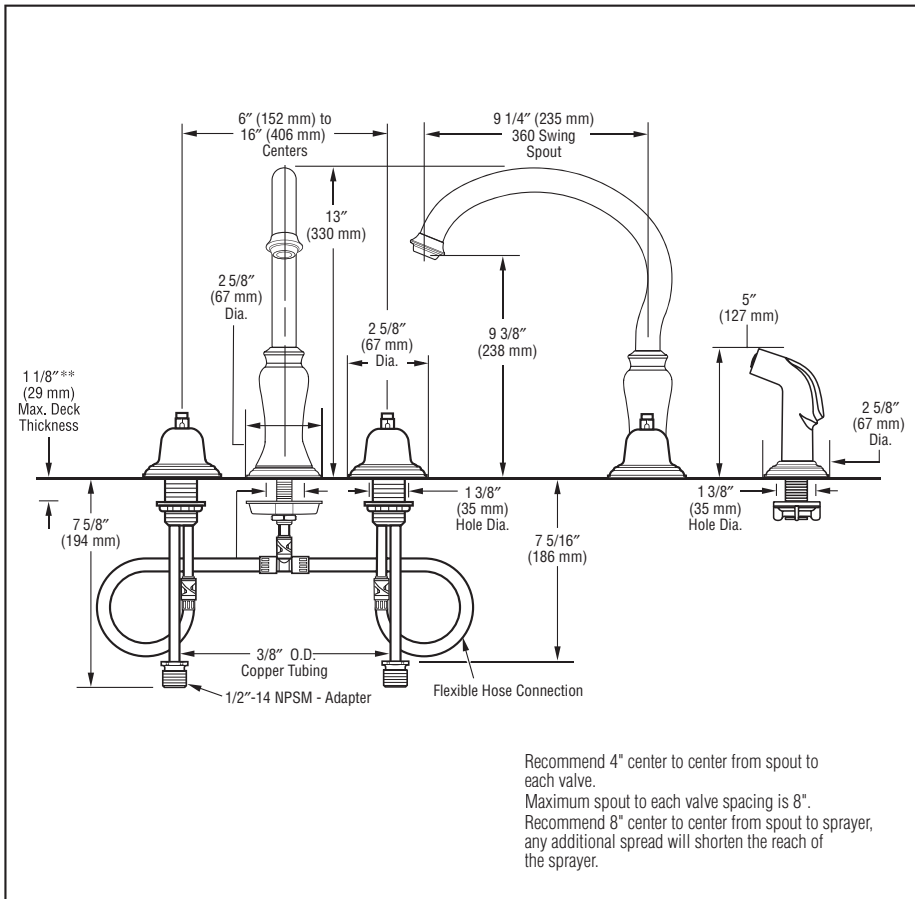

\*\*Thick tile 2 1/8" mounting kits available as RP11053 for models with spray.

# BRIZO™

## KITCHEN FAUCETS

- Stratford™ Classic Series
- Two-Handle Widespread
- Ceramic Disc Valving
- 4 Hole Sink Applications
- 6" (152 mm) to 16" (406 mm) Centers
- Quick Snap® Installation




### COMPLIES WITH:

ICC/ANSI A117.1/ADA  
CSA B125  
ASME A112.18.1  
NSF 61

### STANDARD SPECIFICATIONS:

- Two handle kitchen deck faucets for concealed mounting on four hole sinks.
- Solid brass fabricated end valve and spout bodies.
- Ceramic disc valving.
- Widespread - 6" (152 mm) to 16" (406 mm) centers.
- 9 1/4" (235 mm) long, 13" (330 mm) high, spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/4 turn stop may be removed for 180° rotation.
- Quick Snap® installation.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Anti-siphon device as integral part of valve body for spray attachment.

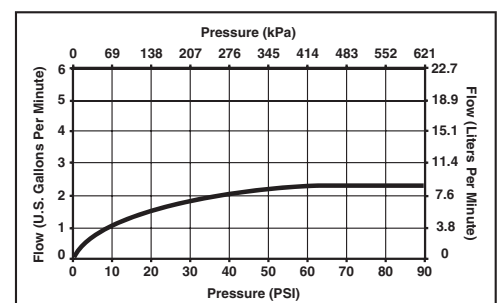


Standard Features	62301*-LHP
Washerless	◆
Ceramic Disc Valving	◆
Four Hole Installation	◆
Widespread—6" (152 mm) to 16" (406 mm) Centers	◆
9 1/4" (235 mm) Long, 13" (330 mm) High, Spout Swings 360°	◆
Less Handle Program—See Handle Kit Options*	◆
1/4 Turn Stops with Brass Stems	◆
3/8" O.D. Copper Supply Tubes with 1/2"-14 NPSM Adapters	◆
Hose and Spray Assembly	◆
Sprayhead Matches Finish	◆
Quick Snap® Installation	◆

\*To specify finish add suffix

#### Available Finishes

Suffix	Finish
BB	<i>Brilliance</i> ® Brass
PC	Polished Chrome
PN	<i>Brilliance</i> ® Polished Nickel

#### AVAILABLE HANDLE OPTIONS:

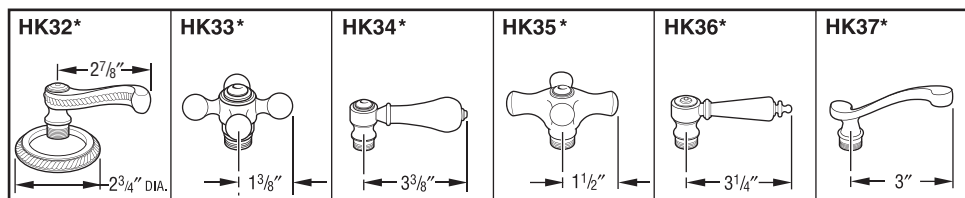

\*To specify finish, add suffix.