



Quality:	LINUS	Collection:	Inspiration
Construction:	Tufted 5/64" velours, printed	Pile material:	100% Polyamid
Backing:	texback®contract	Carrier material:	PES-Fleece





1658-CPD-1016
Vorwerk & Co. Teppichwerke
GmbH & Co. KG
Kuhlmannstrasse 11
D – 31785 Hameln

EN 14041: 2004




EN 1307

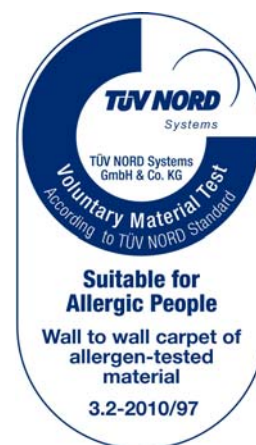

Gauge / 10 cm	approx.	50	Pile weight g/m²	approx.	700
Tufts / 10 cm	approx.	70	Primary backing weight g/m²	approx.	120
Points dm²	approx.	3500	Total weight g/m²	approx.	1440
Pile thickness mm	approx.	4,2	Weight of backing g/m²	approx.	650
Total thickness mm	approx.	6,0	Weight of pile material g/m²	approx.	512
			Pile density	approx.	0,123

Castor chair test	DIN EN 985	r ≥ 2,4							
Sound impact	DIN EN ISO 717-2	glued Δ Lw	27 dB						
Sound absorbtion	DIN EN ISO 354	Hz		125	250	500	1.000	2.000	4.000
	glued	αs		0,01	0,02	0,09	0,21	0,38	0,54
Heat flux	DIN ISO 8302: 1991	1/λ =	0,11	m² K/W					
	Suitable for glueing underfloor heating systems								
Fire rating	DIN EN 13501-1	C_{fl} –S1 glued							

Static resistance	DIN EN 1815 Bl. 2	< 2,0	KV	b. 25% rel. F.
Surface resistance	DIN ISO/DIS 10965 Bl. 1 R_{OT}	< 10¹⁰	Ω	b. 25% rel. F.
Vertical resistance	DIN ISO/DIS 10965 Bl. 1 R_{DT}	< 10¹⁰	Ω	b. 25% rel. F.
Fastness to water	DIN EN ISO 105-E 01	colour-changes	N. 4	
Fastness to light	DIN EN ISO 105-B 02		N. 5	
Fastness to rubbing	DIN EN ISO 105-X 12		N. 4	

This quality is suitable for fitting on subfloors with underfloor heating when fully glued with suitable dispersion adhesive. To avoid changes in measurements we recommend total glueing (dispersion adhesives). Laying instructions: refer to our current cleaning and fitting instructions. Due to constant improvements and further developments of our products, we reserve the right to adapt our technical details accordingly.