JB988SK

GE Profile™ 30" Free-Standing Electric Convection Range

Dimensions and Installation Information (in inches)

KW Rating	
240V	13.5
208V	10.1
Breaker Size	
40 Amps [†]	

†Note: Check local codes for required breaker size.

Effective January 1, 1996, the National Electrical Code requires that new construction (not existing) utilize a 4-conductor connection to an electric range.


Receptacle Locations: Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against wall.

Note: 30" ranges conform to U.L. requirements for 0" spacing from adjacent walls below countertops. To reduce possibility of scorching walls, engineering recommends a minimum of 1-1/2" spacing to allow for possible extended, high-heat, no-load heating element operation.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



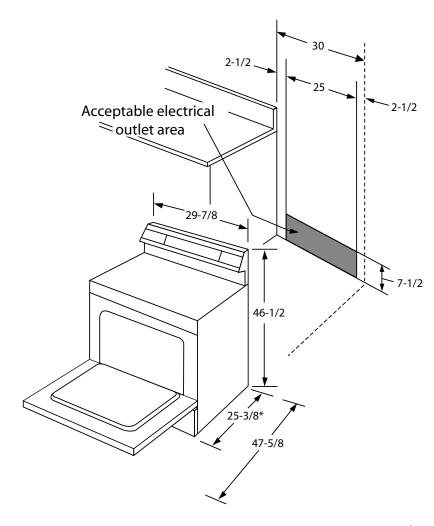

*Dimension from wall to front of closed door handle is 27-3/8".



All GE ranges are equipped with an Anti-Tip device. The installation of this device is an important, required step in the installation of the range.



JB988SK

GE Profile™ 30" Free-Standing Electric Convection Range

Features and Benefits

- Precise Air[™] Convection System Delivers even air and heat circulation for superior baking and roasting results
- Single/Multi-Rack Convection Bake Provides ideal airflow throughout the oven, ensuring optimal results on both racks
- Hidden Bake Oven Interior Hides previously exposed bottom element to deliver a clean interior appearance
- 12"/9"/6" Tri-Ring Element Provides three cooking areas in one for the ultimate in cooking versatility
- Precise Digital Control System[™] Delivers accurate control on the cooktop, ensuring even heating and less temperature variation
- Self-Clean Oven Conveniently cleans the oven cavity without the need for scrubbing
- Self-Clean Heavy-Duty Oven Racks Double coated procelain-enameled racks no longer require hand cleaning
- TrueTemp™ System Delivers even heat distribution and maximum oven control
- Auto Recipe™ Conversion Automatically converts standard recipe temperatures to proper convection settings, eliminating the guesswork
- Model JB988SKSS Stainless steel with black accents

