

FIAT®

NEW

Model MTS6300M-3 Enova

Measures 62" x 30½" x 88¼" (1575 x 775 x 2242)



FEATURES:


- unique FIATFusion™ system joins the sections together for a permanent bond
- installs completely from the front
- no complicated joining systems, no vinyl gaskets
- cut lines blend into the design
- wide open in appearance with plenty of headroom
- 30.5" (775 mm) front to back dimension
- built-in clear acrylic grab bars, integrally molded soap dish and shelves
- squared front design will accept most framed doors made by other manufacturers
- suitable for above floor rough-in
- 1" (25mm) screw flange for easy fastening to studs
- bottom of flange notched to accommodate sill plate

Quality for Life

† This dimension includes 1" (25mm) screw flange each side. Recess required is 2" less than overall dimension indicated.

†† This measurement indicates the inside dimension area for shower doors.

Measures 62" x 30 1/2" x 88 1/4"
(1575 x 775 x 2242)

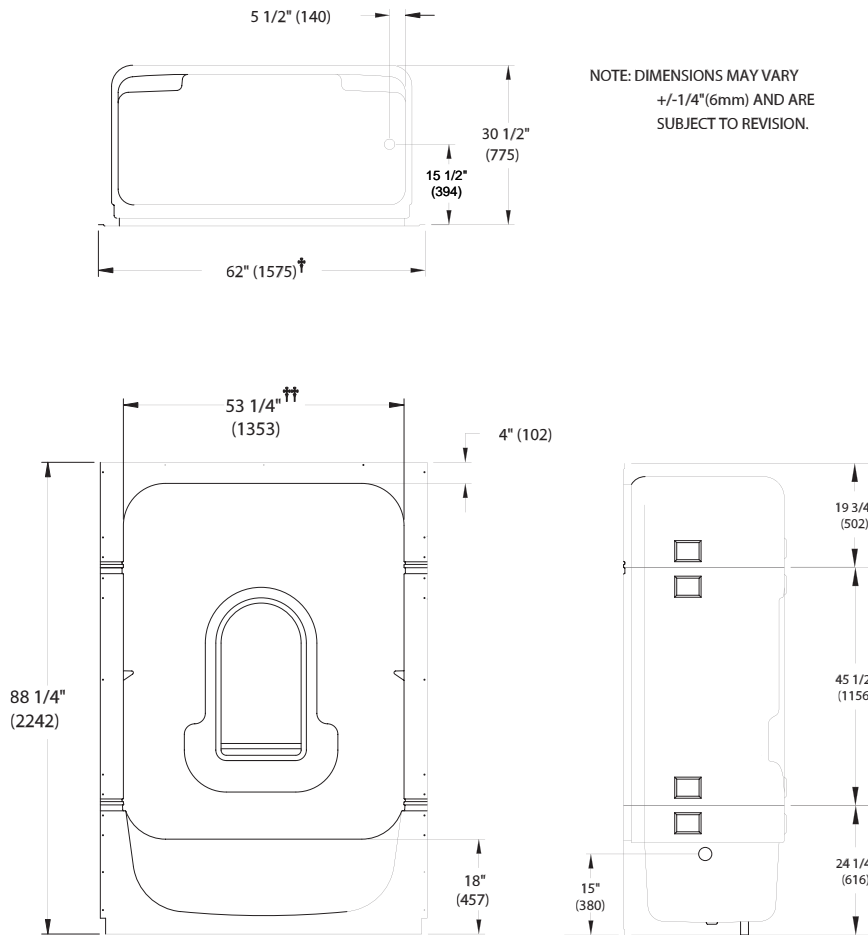

Available Options: • Steam package (-S): with generator, control, steam head and SD70C door in chrome or gold finish • Whirlpool package, 6 jets (-W) • Bubbler package, 10-buttons (-B) • SD60 series tempered glass sliding door, clear, patterned or obscure design, in chrome or gold finish • SDEU65 series Eurodoor sliding bypass with clear, reeded or rain glass in chrome or brushed nickel finish • SD70C series aluminum steam door enclosure with clear glass, in chrome or gold finish (-SD package must be specified at time of ordering) • Removable acrylic seat • Model 1002/1021 waterproof canopy light package – CSA approved (for field installation) • White and colours

General:

The modular showers shall be manufactured by FIAT Products. The units shall be thermoformed from continuous cast, cross linked acrylic sheet into a one-piece seamless unit with smooth rounded corners and reinforced in back with fibreglass and polyester resin which has been further treated with a flame retardant additive. All FIAT acrylic units meet or exceed flame and smoke

standards as outlined in the National Building Code of Canada. All grab bars meet or exceed ASTM standards. Modular showers shall be pre-drilled for drain fitting connection (supplied by others). Vertical flanges shall be pre-drilled to facilitate to attaching to studs.

Important:

Dimensions may vary plus or minus 1/4" (6 mm) and are subject to revision. Specifications are subject to change without notice. Unless otherwise specified, CSA approval has been obtained wherever required. All products must be installed in accordance with installation instructions provided. Failure to do so may invalidate warranty at manufacturer's discretion.

Warranty:

Fiat Products warrants to the purchaser of FIAT Bathware Products that each unit is free from defects in material and workmanship, under normal use for a period of 5 years on regular acrylic units, 3 years on steam suites, and one year on doors. Fully detailed warranty card and installation manual are supplied with each unit.

FIAT makes it easy for you to install a FIAT 3-piece bathing suite in any existing home or apartment. All 3 sections fit through 26" (660) doorways and the exclusive "FIATFusion®" system locks the sections together.

