

LYTE-RAIL x6 CLOSET ROD

SERIES 1701



RETAIL / HOSPITALITY

HIGH PERFORMANCE LEDs:

- Tightly binned mid-powered Samsung GEN2 LEDs and proprietary PCB system for even illumination, with superior thermal management
- 50,000 hours at 70% lumen maintenance (L70)
- 2700°K, 3000°K, 3500°K, and 4000°K available at CRI 95 R9 92, R9 96

PERFORMANCE:

- LED3 (3 Watts per foot) 300 Lumens/foot, with a total efficacy of 96 Lumens/Watt @ 2700°K, with CF lens, based on independent photometric LM79 test reporting

REMOTE DRIVER:

- Universal voltage driver 120 - 277v (50 - 60Hz), 37 vdc output
- Constant current, full cut off standard dimmable 0 - 10 volt driver, .95 Power Factor

HOUSING:

- Architectural grade, low copper content, 6063 recycled aluminum extrusion and machined milled endcaps and accessories
- Low profile 1.3" depth
- 20 lbs / foot maximum load rating
- Clear or Frosted Virgin Acrylic Lens, micro-ribbed texture
- EZ- Glide insert for maximum fluidity of hanger movement

MOUNTING:

- Machined aluminum endcaps for easy insert and assembly
- Power or Non-Power Feed cable mounts
- Joiner for continuous rows
- 18 ga lead wire

WEIGHT: Lightweight, 9 oz per 12"

FIXTURE:

- Customizable to any length
- Field rotatable design for custom lighting options
- Choice of drivers and dimming capabilities
- 7 year warranty

CERTIFICATIONS:

- UL Certified / UL Damp location rated



Center Support Bracket
for fixtures over 5ft



End Cap Mount

SPECIFICATION / ORDERING CODE: Example (10) 1701-CL-LED-27-90-LED3-36-CF-BL-TR

QTY	PRODUCT	MOUNT	LED-CCT	CRI	LED3	LENGTH (IN)	PRISMATIC LENS	FINISH	DRIVER
#	1701-CL LYTE-RAIL CLOSET ROD	CSB Center Support Bracket	LED-27	90	LED3 3 Watts / Foot	12	CC Crystal Clear	AN Anodized Clear Natural	ND Non Dimmable
			2700K			24			
			LED-30			36		CF Clear Frosted	WH White Powdercoat
		3000K	48						
		LED-35	60			BL Black Powdercoat	ZT 0-10v PWM		
		3500K	72						
		LED-40	84			RAL# Powdercoat	LU Lutron		
4000K	96								
	1701-CL			90	LED3				

OPTIONAL: Remote Emergency Battery Surface Mount Box

SUBMITTAL:

Date: _____
 Project: _____
 Fixture Type: _____
 Location: _____
 Comments: _____



TYC LIGHTING. 2800 Saturn Street Brea, CA 92821 Phone: 714.522.6688 x7 www.tyclighting.com


Copyright© TYC Lighting TYC 1701 11/18/15 Specifications subject to change without notice. Please visit website for updates.

LYTE-RAIL x6 CLOSET ROD

SERIES 1701




PHOTOMETRICS

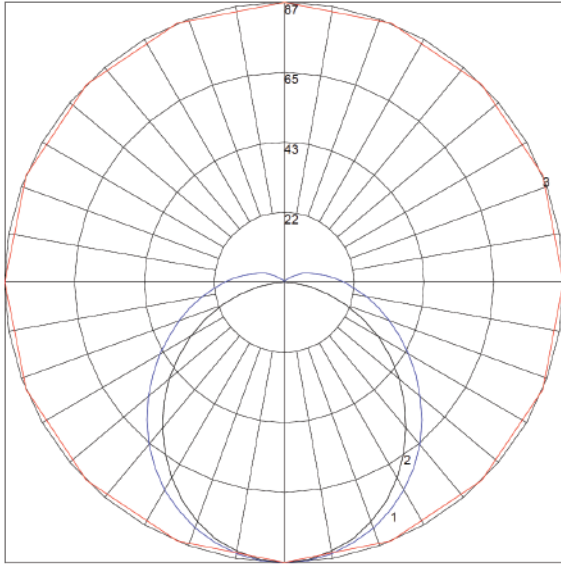

SPECIFY LENGTHS

- Specify from 24" to any increment in 12" lengths. Lengths > 96" will utilize non-power joiner mounts for a continuous row at any length.

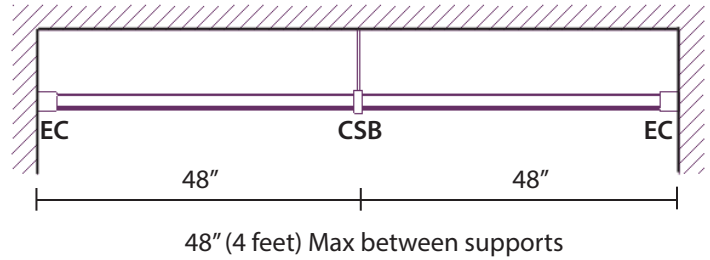


COLOR OPTIONS

- Full RAL color spectrum finishes available for 1701 and related products
- Please visit: www.ralcolor.com for all available options



RELATED PRODUCTS

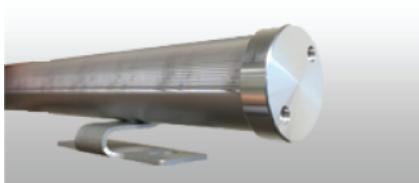

1702 - L-Rx6 Cove Lighting



1703 - L-Rx6 Cable Mount Pendant



1704 - L-Rx6 Stem Pendant



1705 - L-Rx6 Wall Wash



1706 - L-Rx6 Sconce