
JOB NAME

CATALOG NUMBER

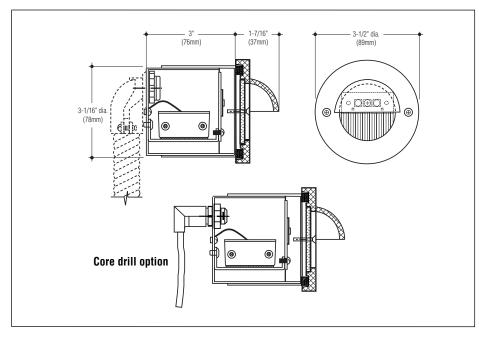

TYPE

Steplites

L131 SERIES

Description

This compact directional Steplite features high performance LEDs. It is appropriate in a variety of interior or exterior applications where low glare and cutoff performance is desired. The rugged construction, engineering excellence, and quality make this fixture ideal for specification in most public areas.

Construction

 Housing is 16 gauge spun steel suitable for concrete pour installation
Housing coated in white polyester
Cast aluminum eyelid faceplate with a metallic aluminum polyester finish, retained by stainless steel screws
Clear ribbed spread lens set in silicone sealant
Suitable for wet locations in any wall construction.

Electrical

- Fixture is wired with high performance LEDs
- Integral driver is 120V only and features ELV dimming capability One 1/2"conduit knockout provided on back of housing Core drilled versions include 6 ft. of 18/3 jacketed cord and weatherproof strain relief.

Mounting

Holes provided in back of housing for mounting.

Custom

If your project demands a special fixture we would be pleased to discuss the production of modified standard fixtures or custom fixtures to suit your specific conditions. For more information on our custom capabilities, please contact your local Cole representative.



C.W. Cole & Company, Inc. 2560 N. Rosemead Boulevard South El Monte, CA 91733-1593

Tel. (626) 443-2473 Fax (626) 443-9253 info@colelighting.com www.colelighting.com

screws. Add suffix ____-TP.

Add suffix -B.

Bronze faceplate: Satin finish, clear coated.

Alternate faceplate color: Black or white.

Add suffix -BLK or -WHT.