


## Preparation

Check all instructions with the fixture as some preparation may be necessary before the following steps.

## Instructions

- 1) Depending on the length of screws supplied with the junction box (by others), you may need to use the longer screws provided. Fasten Cast Swivel Plate to junction box.
- 2) Insert stem through canopy, pull fixture wires through stem and securely fasten stem to the fixture.
- 3) Lift swivel ball through slot in the cast swivel plate and drop into center hub, aligning anti-rotation groove with tab.
- 4) Fasten retainer to cast swivel plate with screws provided.
- 5) Make all wire connections per local and national codes.
- 6) Lift canopy in place and secure with screws provided.

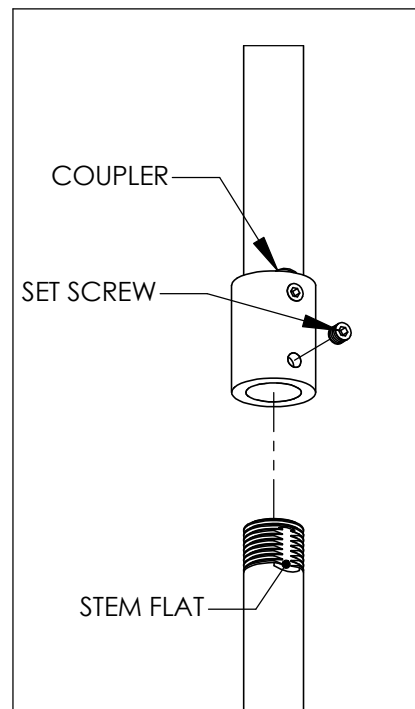

For a long overall, attach the stem segments with supplied coupler. Align flats on stem to set screws and securely fasten.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- 1) Read all instructions carefully before installing and save for future use. Make sure all connections are in accordance with the National Electrical Code and local regulations.
- 2) To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture. Service should be performed by qualified personnel.
- 3) These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

**Drawing : 760660XX**  
**Rev : A**    **Sheet 1 of 1**

**VISA LIGHTING**  
An Oldenburg Group Company  
1717 West Civic Drive Milwaukee, WI 53209  
414-354-6600  
Design Modification Rights Reserved  
© Visa Lighting 2006

**INSTALLATION INSTRUCTIONS: CP**  
**Fixture family name: Pendants**

Description: FIELD INSTRUCTION FOR MOUNTING SWIVEL HANGER (1/8 IP) TO STANDARD JUNCTION BOX

Drawing : 760660XX  
Rev: A

Sheet 1 of 1  
Eng: CGA

Date drawn: 4/28/2006