


5 TEST INSTALLED FAUCET AND CONNECTIONS FOR LEAKS

- Remove AERATOR from faucet.
- With HANDLES (1) in OFF position, turn on WATER SUPPLIES (2) and check all connections for leaks. ➡
- Operate both HANDLES (1) to flush water lines thoroughly.
- Check all drain and "P" trap connections for leaks. ➡
- Replace AERATOR.

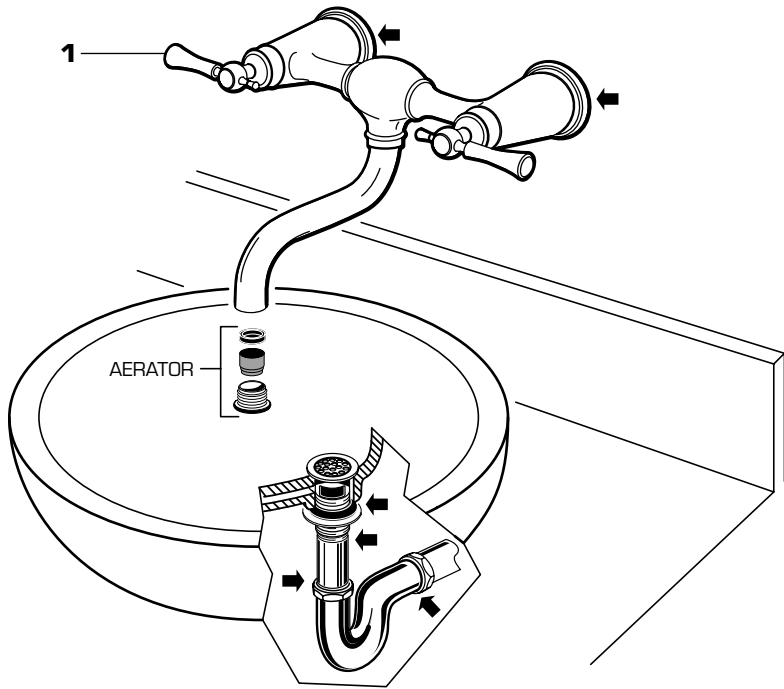

6 HELPFUL HINTS FOR CLEANING AND MAINTENANCE

The solid brass product you have just purchased has been designed to give you years of beauty and service. It is important to bring to your attention proper care and maintenance procedures, which will ensure its lasting beauty.

- First and foremost, it is important (as it is with any fine piece of jewelry or furniture) that the product be wiped clean and dry with a soft damp cloth after every use.
- Second, under no circumstances should an abrasive cleaner or combination cleaner/polish be used on JADO products. The abrasive nature of such products will eventually destroy the finish and void the warranty.
- In the event of stubborn blemishes shown on the finish, we recommend use of Windex window cleaner with a soft cloth, but we do not recommend it be used on an everyday basis.
- It is important to note that it is normal to expect signs of usage over time.
Thank you for selecting JADO for your home.

TO THE PURCHASER OF JADO BRASS PRODUCTS

Attention installer:
Please leave This Pamphlet for The Owner

NOTICE: JADO products conform to industry requirements of water conservation under the ASTM / ANSI A112.18.1M-1994 plumbing code. Lavatory, bidet, wet bar and kitchen faucet sets have a maximum flow rate of 2.2GPM. Shower heads, hand showers and body sprays have a maximum flow rate of 2.5GPM.

The state of California has mandated under Proposition #65 that manufactures of products, including faucets which come into contact with potable water, must warn the consumer if the product contains materials listed by the state as a carcinogen or reproductive toxin. Lead, which is contained in all brass faucets in limited amounts appears on the State's list.

Preliminary industry tests have indicated that users of faucets made from brass face no significant danger, however, California Proposition #65 requires that we provide you with the following notice:

Warning: This product contains an element known to the State of California to cause cancer of reproductive harm.

JADO BATHROOM AND HARDWARE MFG. CORP.
6615 West Boston
Chandler, AZ 85226

JADO FAUCET LIFETIME FUNCTION AND FINISH LIMITED WARRANTY

JADO Bathroom & Hardware Manufacturing Corp. provides the following warranties only to the first residential owner of our products. **FINISHES**

JADO warrants this product to be free from defects in materials or workmanship for as long as the original consumer purchaser owns their home.

JADO will provide, free of charge, at it's sole option, replacement part(s) or product (or if no longer available, a comparable product) to replace those which have proven defective in materials or workmanship.

Proof of purchase (original sales receipt) from the original consumer purchaser must be made available to JADO for all limited warranty claims. This limited warranty is non transferable. It does not apply in the event of product damage due to the use of other than genuine JADO replacement parts, installation error, abuse, misuse, or improper care and maintenance (whether performed by a plumber, contractor, service provider or member of the purchaser's household). The limited warranty excludes damage due to aggressive air or water conditions, or harsh or abrasive cleaners and/or materials. This limited warranty excludes all industrial, commercial and business usage, whose purchasers are hereby extended a two year limited warranty (with the exception of solenoid valves and other electronic components which carry a one year limited warranty) applying to all other terms of this limited warranty except duration. This limited warranty does not cover labor charges incurred and/or damages sustained in installation, repair or replacement, nor incidental or consequential damages, all of which are expressly disclaimed. This limited warranty is applicable only to JADO faucets manufactured after June 1, 1996 and installed in the United States and/or Canada.

This limited warranty gives the original consumer purchaser of an JADO faucet specific legal rights which may vary from state to state or from province to province. This limited warranty does not cover any liability for consequential or incidental damages, all of which are hereby expressly disclaimed, or the extension beyond the duration of this limited warranty of any implied limited warranties, including those of merchantability or fitness for an intended purpose. In some states or provinces the exclusion or limitation of incidental or consequential damages is not allowed, so those exclusions may not apply to you.

POLISHED BRASS AND CUSTOM FINISH WARRANTY: A 1 YEAR LIMITED FINISH WARRANTY from date of purchase is provided to the first residential owner against defects in materials and workmanship. Due to the ever-changing finish of Patina products, the finish warranty is excluded. Warranty shall not include problems related to the installation of the product.

MECHANICS

MECHANICAL WARRANTY: A LIFETIME LIMITED WARRANTY is provided to the first residential owner on parts to be free from failure related to defects in materials and workmanship but not installation.

CONDITIONS TO WARRANTIES

JADO Bathroom & Hardware Manufacturing Corp. places the following conditions on its finish and mechanical warranties to the first residential owner only. JADO finish and mechanical warranties are limited to products correctly installed and used in a residential environment. JADO warranties will not assume liability for damage due to abuse, mishandling, incorrect installation, improper maintenance, or deterioration due to normal use. JADO will not be liable for labor or other costs relating to the sale, installation, or replacement of their products. In the event of a defect in any JADO product covered by this warranty, the product must be returned to the dealer where originally purchased along with proof of purchase. JADO's obligation under the warranty shall be limited to the repair or exchange of any product which has been determined by JADO to be defective after appropriate examination.

H965501A

JADO

P r o d u c t s

Hatteras

Product Numbers

842/602/...

842/612/...

JADO USA
6615 West Boston
Chandler, AZ 85226
Phone: (800) 227-2734
Fax: (800) 552-JADO(5236)
www.jadousa.com

©JADO USA 2004

Bridge Vessel Faucets
Installation Instructions


To ensure that your installation proceeds smoothly--please read these instructions carefully before you begin.

L u x u r y F a u c e t s a n d A c c e s s o r i e s




H965501A

TOOLS REQUIRED

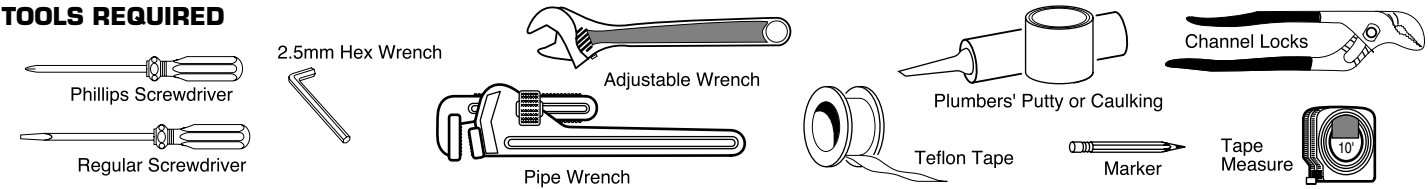


ROUGHING-IN DIMENSIONS

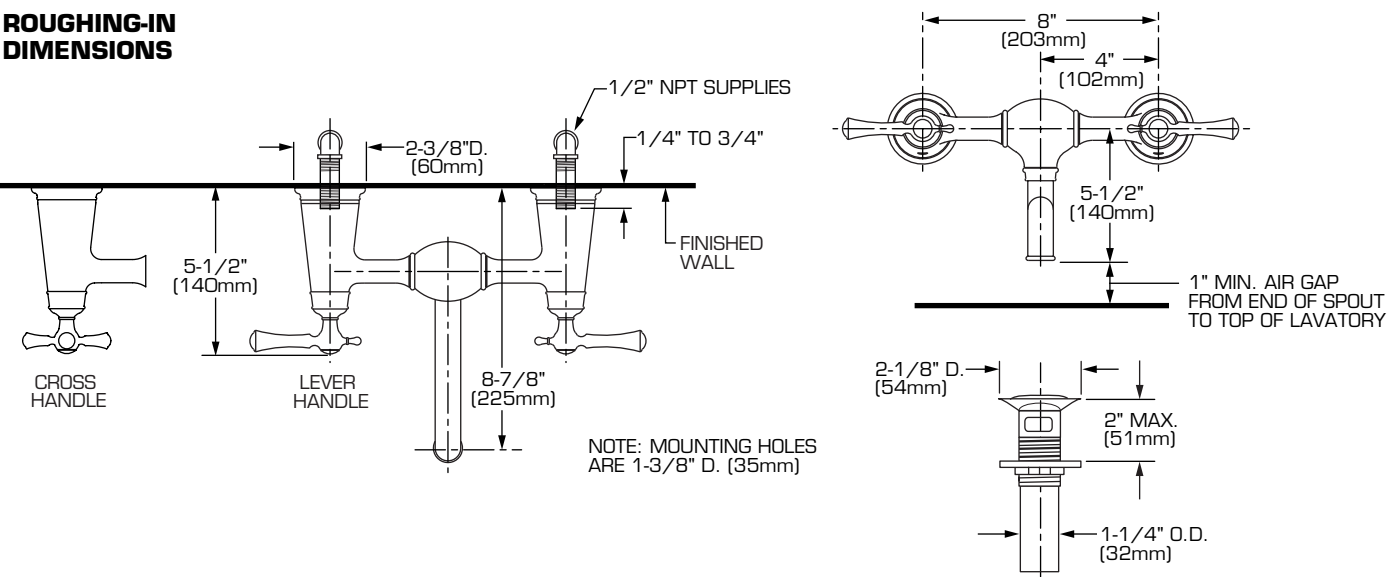

1 INSTALL ROUGH PIPING


CAUTION Turn off hot and cold water supplies before beginning.

- Determine where the finished wall location will be. **This measurement is very important!** Note: The rough-in measurement from the finished wall to the end of the rough-in nipple is 1/4" to 3/4". See rough-in illustration below.
- Install a 3/4" plywood cross brace between the wall studs.
- Assemble 1/2" NPT SUPPLIES at 8" from center to center.
- Finish all wall construction.

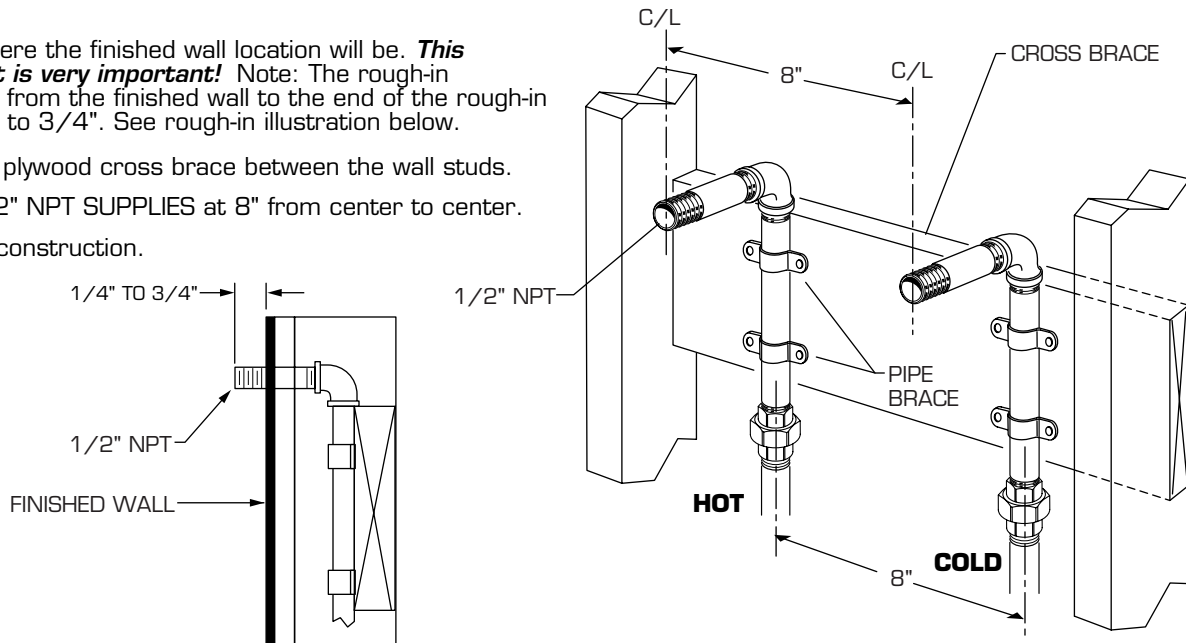

2 DRAIN INSTALLATION



- Apply a bead of PUTTY to underside of FLANGE on DRAIN BODY (1)
- Feed DRAIN BODY (1) down through lavatory.
- Assembly GASKET (2) WASHER (3) and LOCKNUT (4) onto DRAIN BODY (1). Tighten LOCKNUT (4) firmly.
- Assembly TAILPIECE (5) to DRAIN BODY (1).

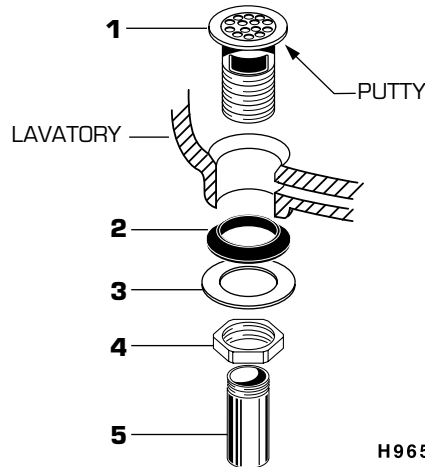

H965501A


3 INSTALL FITTING ADAPTERS

- Apply thread sealant or Teflon Tape to threads of Hot and Cold supplies.
- Use a 12mm hex wrench to install SUPPLY ADAPTERS (1) onto supply pipes. Make sure O-RINGS (2) are installed on SUPPLY ADAPTERS (1) and are not damaged.
- Thread FAUCET ADAPTERS (3) onto SUPPLY ADAPTERS (2). FAUCET ADAPTERS (3) should extend approx. 2" (51mm) from finished wall and be 8" (203mm) on centers to mate with faucet body. See **Figure A**.

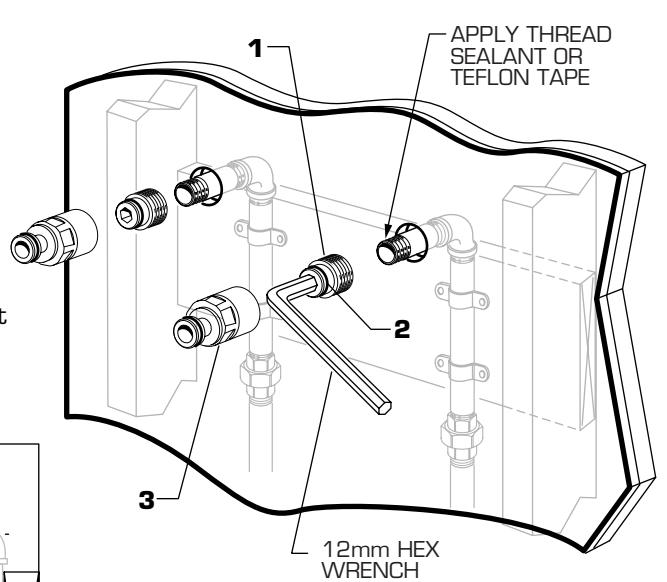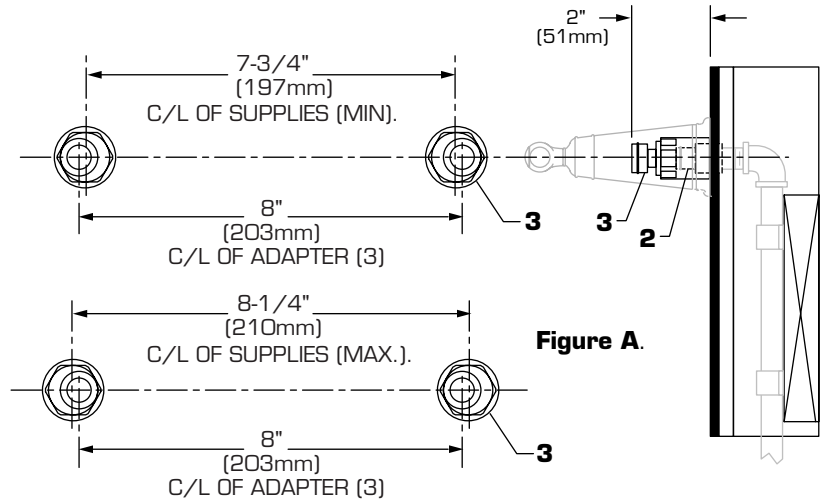

4 INSTALL FITTING

- Install SPOUT (1) into VALVE BODY (2) opening. Align the slot in SPOUT (1) with the threaded hole in VALVE BODY (2). Thread SET SCREW (3) into VALVE BODY (2) and tighten with a flat blade screw driver to secure SPOUT (1). Insert PLUG BUTTON (4) into back of SET SCREW (3). **CAUTION: Be careful not to damage SPOUT O-RINGS (5) when installing SPOUT (1).**
- Check that FAUCET ADAPTER (10) centers are 8" (203mm) apart and level.
- Apply sealant to the back side of ESCUTCHEONS (6).
- Make sure O-RINGS (7) are installed on FAUCET ADAPTERS (10) and are not damaged. Push FAUCET ASSEMBLY (2) onto FAUCET ADAPTERS (10).
- Push faucet firmly against finished wall and tighten the SET SCREWS (8) in valve body with 2.5mm HEX WRENCH (9) supplied to secure the faucet. Insert PLUG BUTTONS (11).
- Remove any excess sealant from ESCUTCHEONS (6) and finished wall.

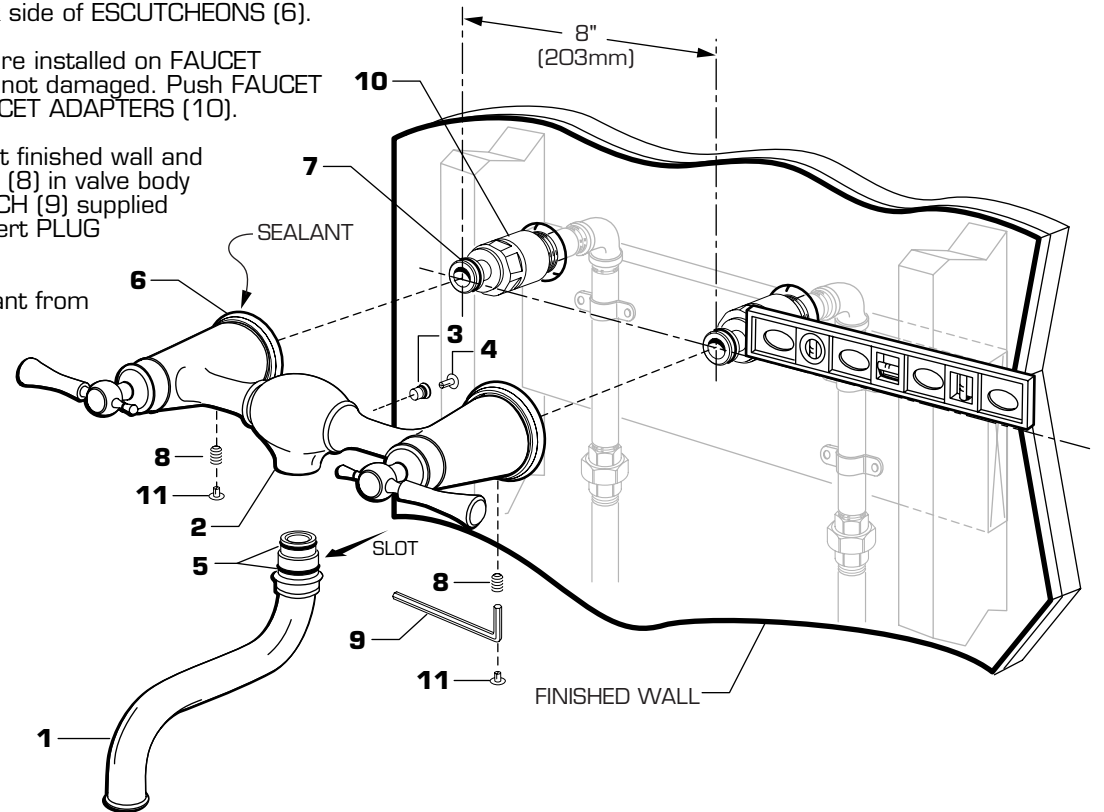

H965501A